

FIXTURE SCHEDULE


FIXTURE SYMBOL (3-A-150): 3=CIRCUIT NUMBER, A=FIXTURE TYPE, 150=FIXT. WATTAGE
 ALL FLUORESCENT LAMPS TO BE "WATT-MISERS" OR EQUAL (U.O.N.) (2)
 ALL FLUORESCENT BALLASTS TO BE MARK III ENERGY SAVERS (U.O.N.)

TYPE	WATTS	LAMPS	VOLT.	MANUFACTURER	CATALOG NO	MOUNT	NOTES
A	100	2-F40	120"	LITHONIA	2GT240A12	FLUSH T-BAR	PER 1/E2
B	100	2-F40		LITHONIA	2EC240A	SURF.	PER 2/E2
C	100	2-F40		KENALL	7235	SURF.	NON-DESTRUCT PER 2/E2 (1)
D	150	3-F40		LITHONIA	2GT240A12	FLUSH T-BAR	PER 1/E2
E	60	60W 1F		MARCO	BN2	WALL +6'-6"	
F	50	MANUF REC		LITHONIA	H2MSW16	SURF.	EXT LIGHT WITH INTEGRAL ENERGY SAVERS

- (1) PROVIDE TWO SCREWDRIVERS FOR TYPE "C" TAMPERPROOF SCREWS.
- (2) NOTE: LAMPS IN CLASSROOM FIXTURES BEING DIMMED TO BE STANDARD F-40 IN LIEU OF WATT-MISERS.

NOTES (THIS SHEET ONLY)

- REPLACE SWITCH(ES) WITH NEW. PROVIDE NEW COVER PLATE.
- REPLACE INCANDESCENT FIXTURE WITH NEW TYPE "B".
- REPLACE INTERIOR BUS AND BREAKERS PER SCHEDULE 1/E4.
- REMOVE EXISTING FIRE ALARM DEVICE. BLANK OFF BOX. PULL OUT IDLE WIRE. (NOTE: EXISTING WIRING RUNS IN SAME CONDUIT AS CLOCK WIRING. VERIFY ROUTE AT SITE.) REMOVE ANY EXPOSED EMPTY CONDUIT, REFILL EXISTING CONDUITS REMAINING AS REQ'D. VERIFY CONDUIT ROUTE AT SITE. CONCEAL IN ATTIC/WALLS WHERE POSSIBLE. WHERE NOT POSSIBLE TO CONCEAL INSIDE BUILDING USE SURFACE RACEWAY (WIREMOLD #700. PAINT TO MATCH ADJACENT SURFACE).
- TO NEW FIRE ALARM MASTER AT BLDG. "B1". RUN ON TOP OF FLAT CORRIDOR ROOF WHERE POSSIBLE. (PROVIDE 2 X 4 REDWOOD BLOCKING SET IN MASTIK AT 5' - 0" O.C. MAX).
- CONNECT FAN COIL (SEE MECH. DRAWINGS) TO EXIST'G 120V CIRCUIT WHERE EXIST'G UNIT WAS REMOVED - PROVIDE ADDITIONAL WIRE, CONDUIT AND BOXES AS REQ'D.
- DISCONNECT EXIST'G MECH. EQUIP. BEING REMOVED (SEE MECH. PLANS). RE ROUTE AND RECONNECT ANY FEED-THRU CIRCUITS, PULL OUT ANY IDLE WIRE, REMOVE ANY EXPOSED EMPTY CONDUIT.
- REPLACE EXIST'G EXIT LIGHT WITH NEW TYPE "E".
- CONNECT NEW MECH. CONTROL XFMR AT EXIST'G AIR HANDLER TO EXIST'G UNSWITCHED 120V LIGHTING CIRCUIT IN AIR HANDLER ROOM (VERIFY LOCATION, RE-PULL EXIST'G CONDUITERS AS REQ'D). SEE MECH DRAWINGS FOR LOCATION.

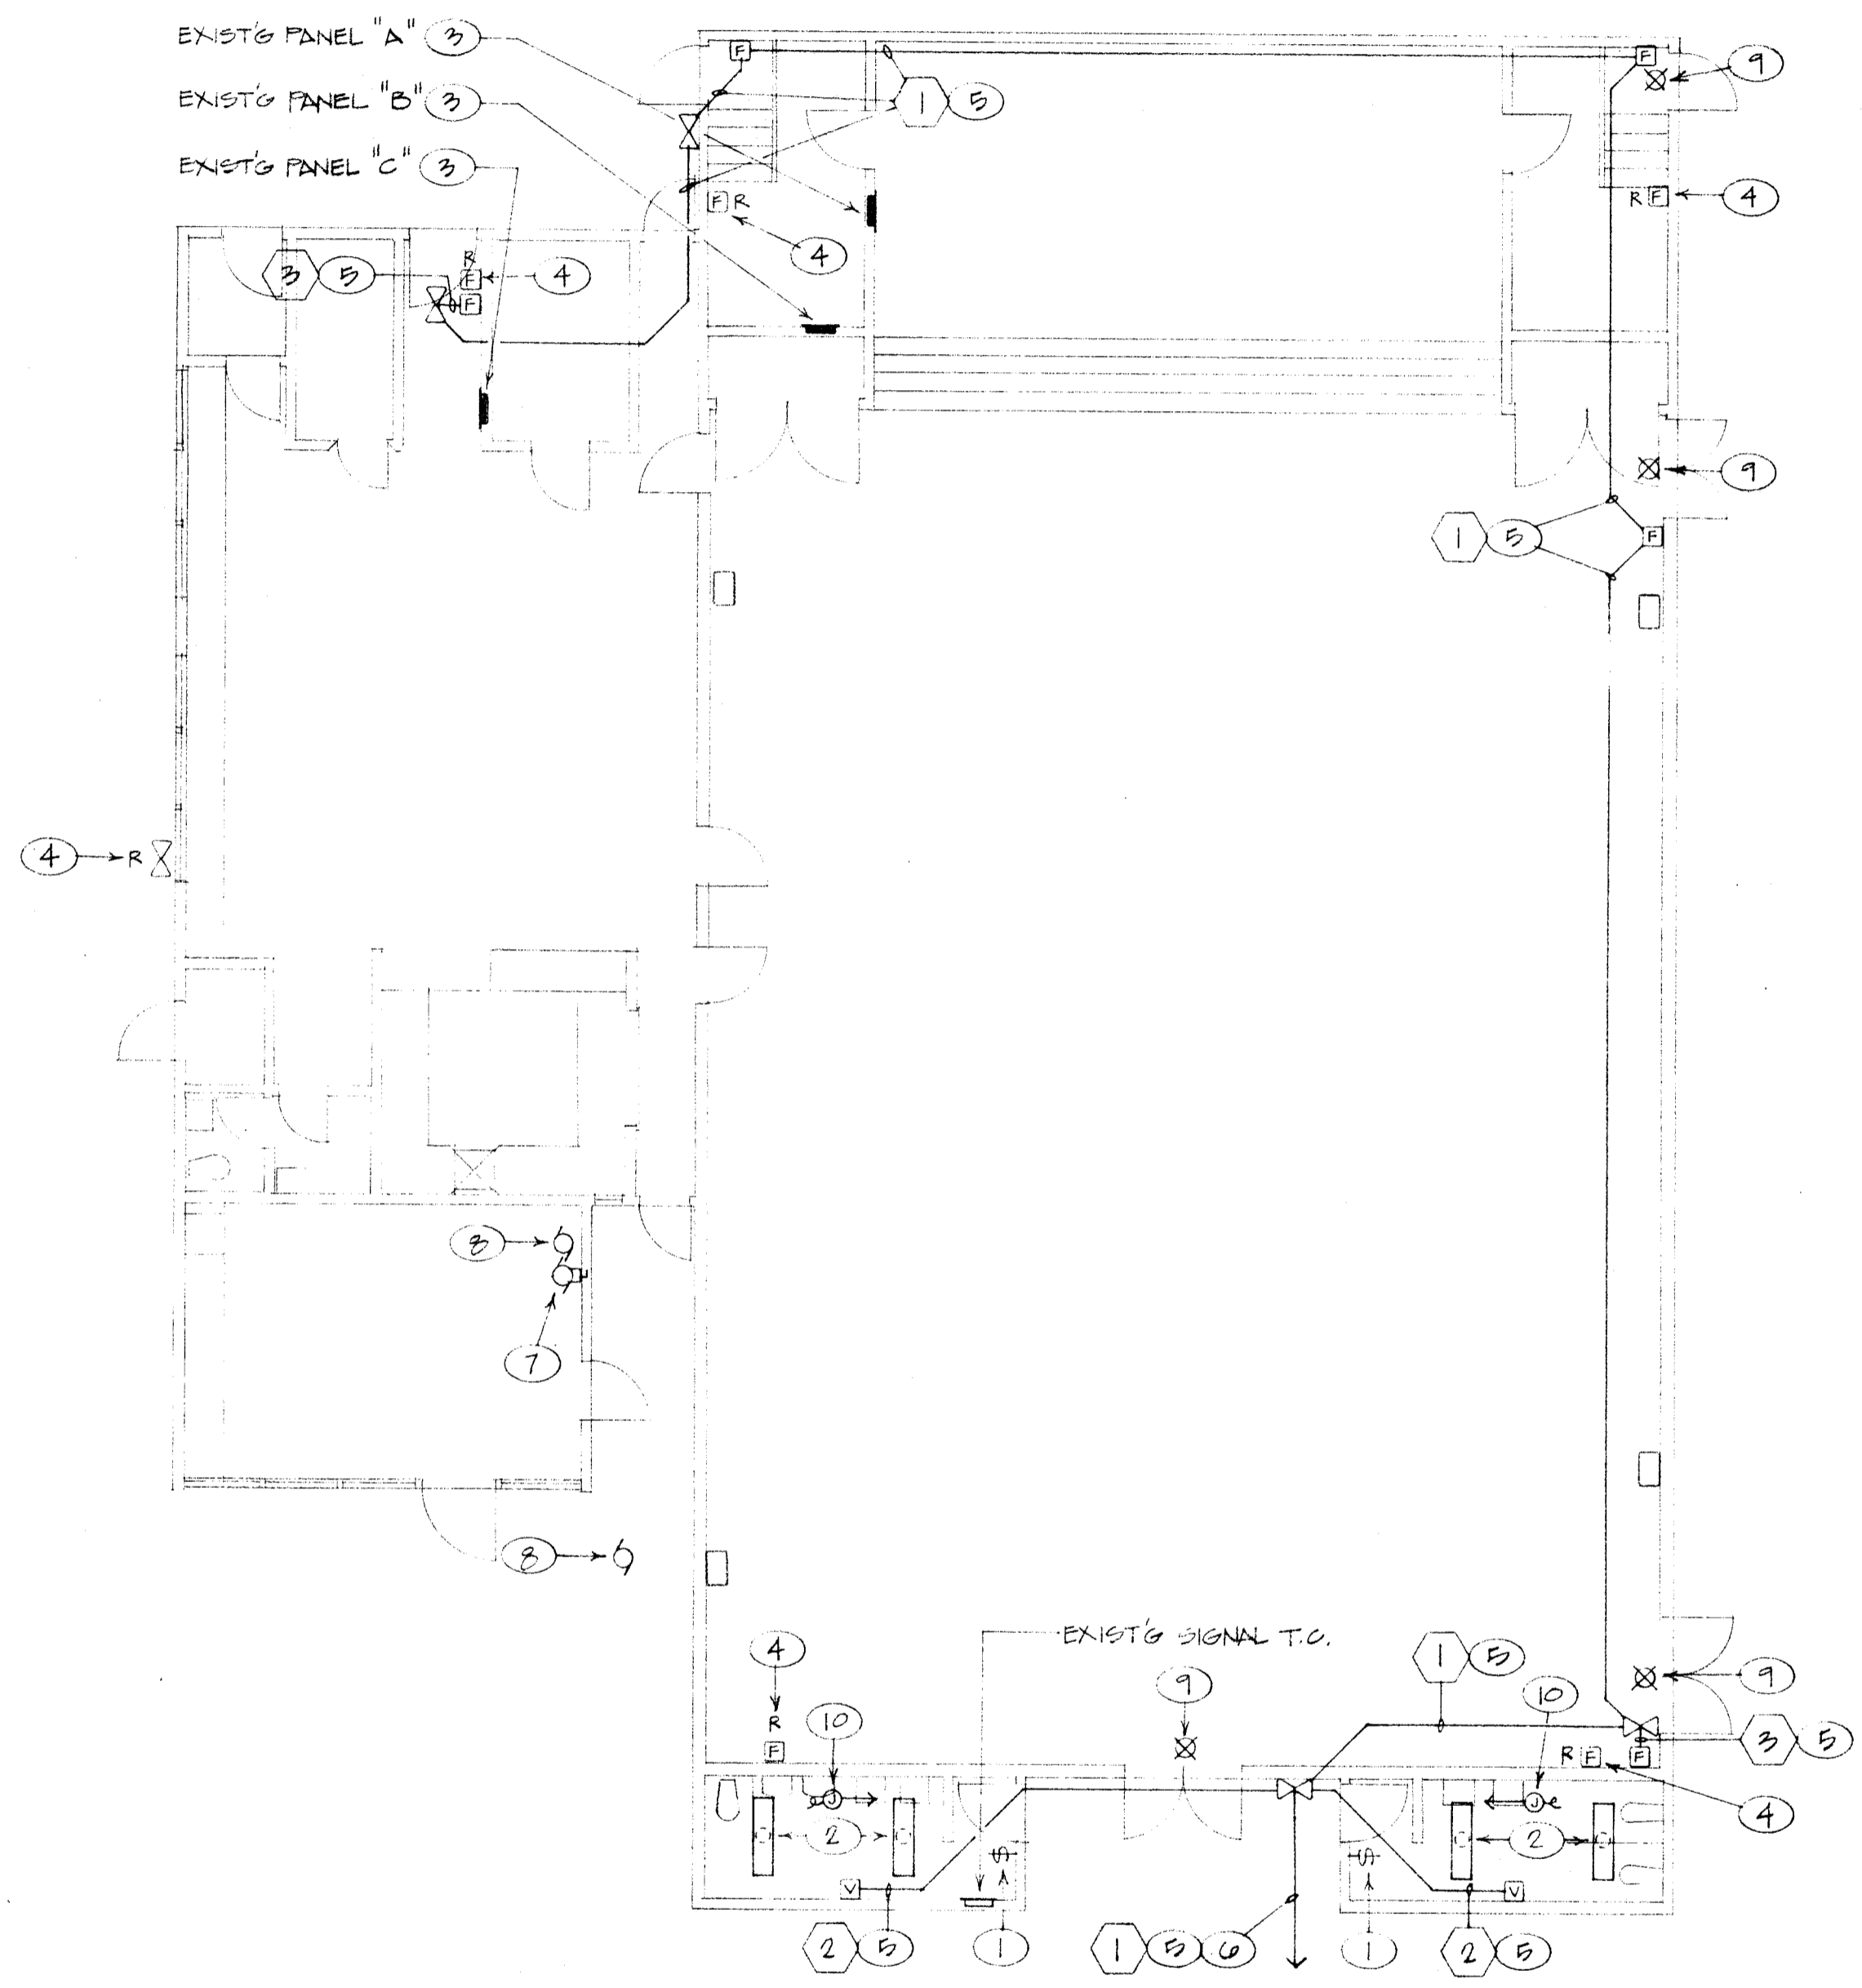

ELECTRICAL PLAN - BLDG. "A"
 SCALE: 1/8" = 1'-0"

ELECTRICAL CONTRACTOR TO PROVIDE 1" x 12" HANGAR WIRE (TAUT) FROM EACH CORNER OF EACH FIXTURE. (ONLY TWO WIRES (AT DIAGONAL CORNERS) ARE REQUIRED IF T-BAR CEILING IS HEAVY DUTY RATED).

LIGHT FIXTURE

CEILING & PANELS BY CEILING CONTRACTOR

PROVIDE SAFETY CLIPS - TWO/SIDE

1
E2
FIXTURE "A" MOUNTING
TYPE "D" SIMILAR
NO SCALE

TWO 16d END NAILS

2x4 FRAME AS REQ'D FOR FIXTURE SUPPORT

LIGHT FIXTURE APPROVED FOR LOW DENSITY MOUNTING

1/8" x 2 1/2" LAG BOLT TO STRUCTURE ABOVE - TWO AT EACH END OF FIXTURE

2
E2
FIXTURE "B" MOUNTING
TYPE "C" SIMILAR
NO SCALE

MUNSEY SCHOOL MODERNIZATION
 BAKERSFIELD CITY SCHOOL DISTRICT
 BAKERSFIELD, CALIFORNIA

APPROVED
 Department of General Services
 Office of Procurement Services
 PPS 2 (8/87)

Kenneth
 Design
 Group
 architects • planners
 2115 19th Street, Bakersfield, CA 93301 • (805) 322-1863

job number
8712

sheet number

E-2

CORNELIUS ENGINEERING, INC.
 Consulting Electrical Engineer
 918 W. Main St. - Ph. 733-2671
 Visalia, California 93291
 Gerald Cornelius Calif. no. 7198