


[illegible]


- NOTES: TYPICAL AT CONCRETE FOUNDATIONS
1. THE CONCRETE CONTRACTOR SHALL COORDINATE THE WORK OF ALL TRADES AND SHALL CHECK ALL DIMENSIONS, ELEVATIONS, AND LOCATIONS. ANY DISCREPANCIES SHALL BE CALLED TO THE ATTENTION OF THE ARCHITECT AND/OR OWNER AND THE BUILDING MANUFACTURER AND BE RESOLVED BEFORE PROCEEDING.
2. DIMENSIONS SHOWN ARE APPROXIMATE AND ARE PROVIDED AS AN AID IN INTERPRETING THE DRAWINGS. DIMENSIONS MUST BE VERIFIED WITH THE ARCHITECTURAL DRAWINGS. IN THE EVENT OF CONFLICT, DIMENSIONS MUST BE CORRECTED AND/OR OWNER AND BUILDING MANUFACTURER AND RESOLVE BEFORE BEGINNING ANY WORK.
- DO NOT SCALE THE DRAWINGS (PLANS OR DETAILS)**
3. THE CONCRETE CONTRACTOR IS RESPONSIBLE FOR PROPER BUILDING SET-UP AND INSTALLATION PRIOR TO BEGINNING ANY CONSTRUCTION.
4. ALL FOOTINGS ARE MIN. 12" THICK, U.O.N.


 --ADDED SHEET
 IDENTIFICATION STAMP
 DIV. OF THE STATE ARCHITECT
 OFFICE OF REGULATION SERVICES
 PC-330

~~IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
OFFICE OF REGULATION SERVICES
02 100845
AC FLS SS
DATE NOV 25 1998~~

IDENTIFICATION STRIP
DIV. OF. THE STATE ARCHITECT
OFFICE OF REGULATION SERVICES
C2 100893
~~AS~~ ~~TS~~ SS *Spencer*
DATE *10/10/98*

EXPIRES 3-31-00

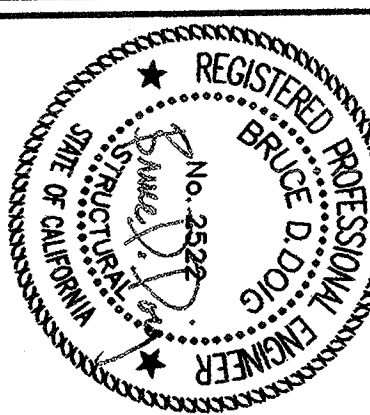

PACESETTER INDUSTRIES, INC.
2507 HERITAGE DRIVE, BLDG. NO. 1230, ATWATER, CA. 95301 TEL: (209) 725-1600 FAX: (209) 381-7833

24x40 RELOCATABLE BUILDING
CONCRETE FOUNDATION PLANS WITH 125 PSF FLOOR LIVE LOAD (ALTERNATE)
(STORAGE OCCUPANCY NOT ALLOWED)

[illegible]

DESIGN (1995 CBC)		
ROOF LIVE LOAD	= 20	PSF (snow)
FLOOR LIVE LOAD	= 125	PSF
WIND	= 75	MPH
SEISMIC ZONE	= 4	or C

DRAWN
BMW
CHECKED
BD
DATE
11-11-98
SCALE
AS NOTED
JOB NO.
97007 P2PC1
SHEET

OF SHEETS
 S2.10
 Δ ADDED SHEET