

Bakersfield City School District

Maintenance, Operations and Facilities Department 1501 Feliz Drive

Bakersfield, California 93307 Office (661) 631-5883 Fax (661) 834-9986

Jason Sitton, Director I sittonj@bcsd.com

Leonard Zasoski Jr., Assistant Director II <u>zasoskil@bcsd.com</u>
Daniel Wastaferro, Assistant Director II <u>wastaferrod@bcsd.com</u>
Juan Montelongo, Assistant Director II <u>montelongoj@bcsd.com</u>

January 29, 2025

To: All Bidders

Re: Chipman Jr. High Exterior Painting Project No. 26100.00-57-DM – Addendum No. 02


Addendum #2

- 1. Currently bids are due at 2:00 p.m. on February 4, 2025. The bid time has been changed to 3:00 p.m. February 4, 2025.
- 2. The outdoor freezer will not be painted.
- 3. Sea-train storage units are to be painted.
- 4. Aluminum awnings and window frames will not be painted.
- 5. All metal fencing to be painted with Electrostatic Paint. See Attachments P.
- 6. All handrails to be painted non-electrostatic.
- 7. No painting of AC Units on Modular Buildings.
- 8. Paint colors to be determined at a later date.
- 9. Dimensions for all surfaces to be painted by the contractor.
- 10. Expanded metal security screens on the windows at the Modular buildings will be removed and will not be reinstalled, no painting is required.
- 11. Access ramps at the modular buildings are to be painted see Attachments P.
- 12. Roof mounted security screens are to be painted.
- 13. All brick walls and columns are to be painted.
- 14. See Attachments P for an outline of the painting on the various buildings throughout the campus.
- 15. Bids are to be submitted individually for each site Chipman, Garza and Noble, combined bids will not be accepted.

Please date, sign and return this form via email to Brenda Orozco at orozcob@bcsd.com.

Date	Print Name	Signature	
Print C	Company Name		
Sincere	ely,		
	•		
Leonar	d Zasoski, Jr.		
LCOIIUI	~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~		

Assistant Director II
Maintenance, Operations and Facilities
Bakersfield City School District

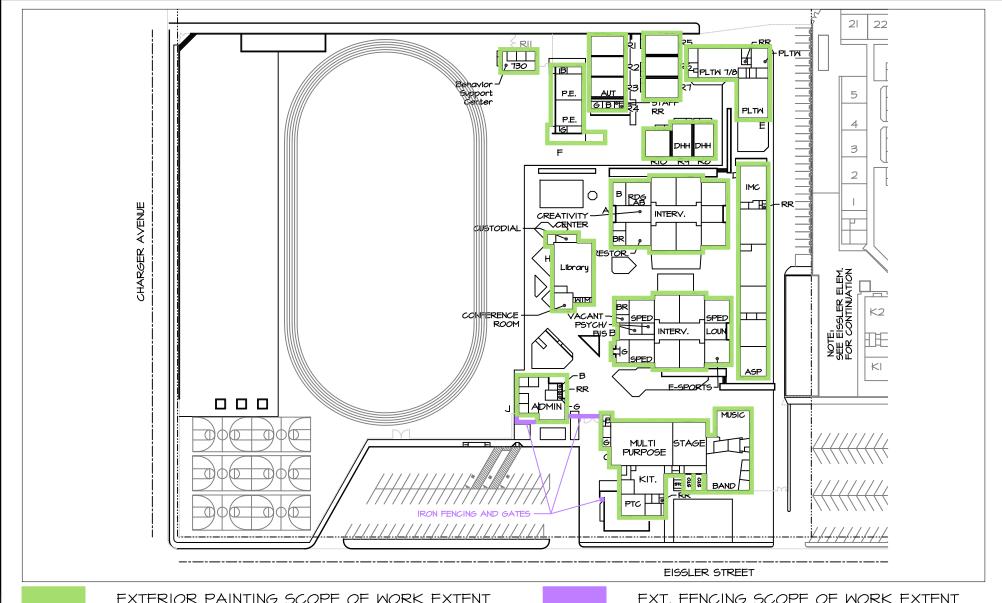

EXTERIOR PAINTING SCOPE OF WORK EXTENT



EXT. FENCING SCOPE OF WORK EXTENT



BAKERSFIELD CITY SCHOOL DISTRICT

EDUCATION CENTER 1300 BAKER STREET BAKERSFIELD, CA 93305 Ph. 661.631.4600 Fax. 661.326.1485


MAINTENANCE OPERATIONS DEPARTMENT


1501 FELIZ DRIVE BAKERSFIELD, CA 93307 Ph. 661.631.5883 Fax. 661.834.9986


DRAWINGS FOR:


CHIPMAN JUNIOR HIGH


PAINTING IMPROVEMENTS 2905 EISSLER STREET BAKERSFIELD, CA

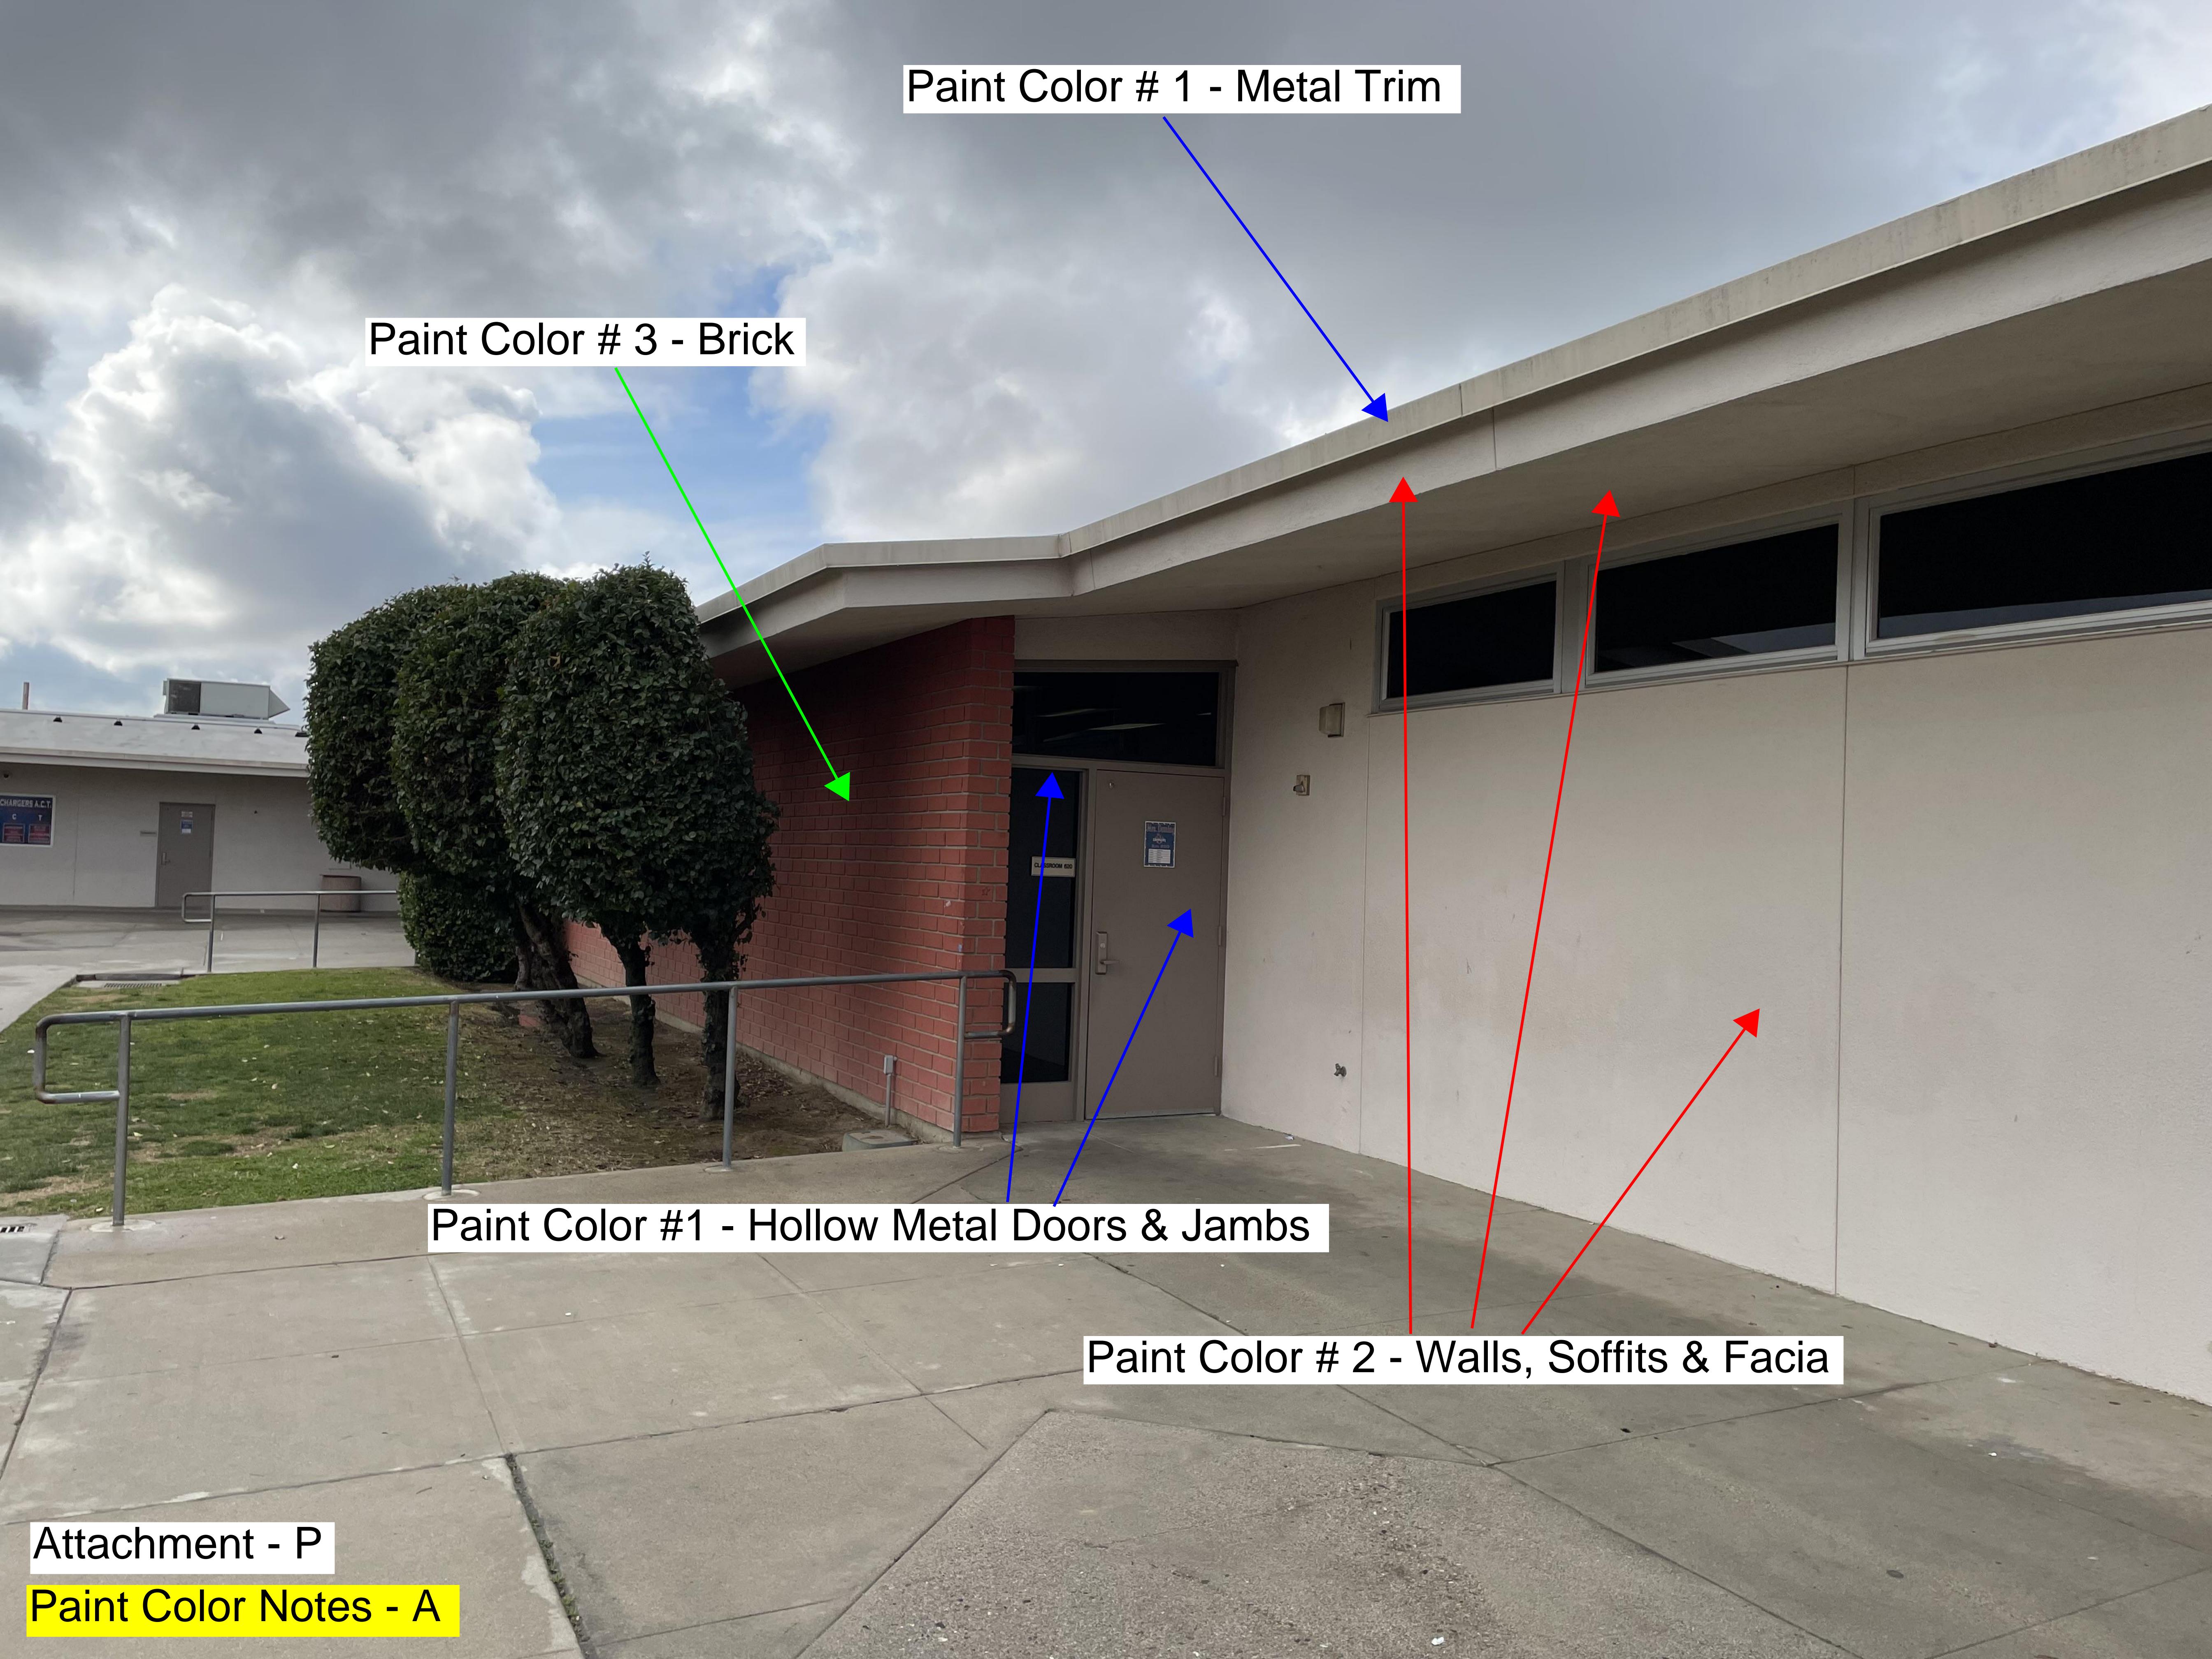

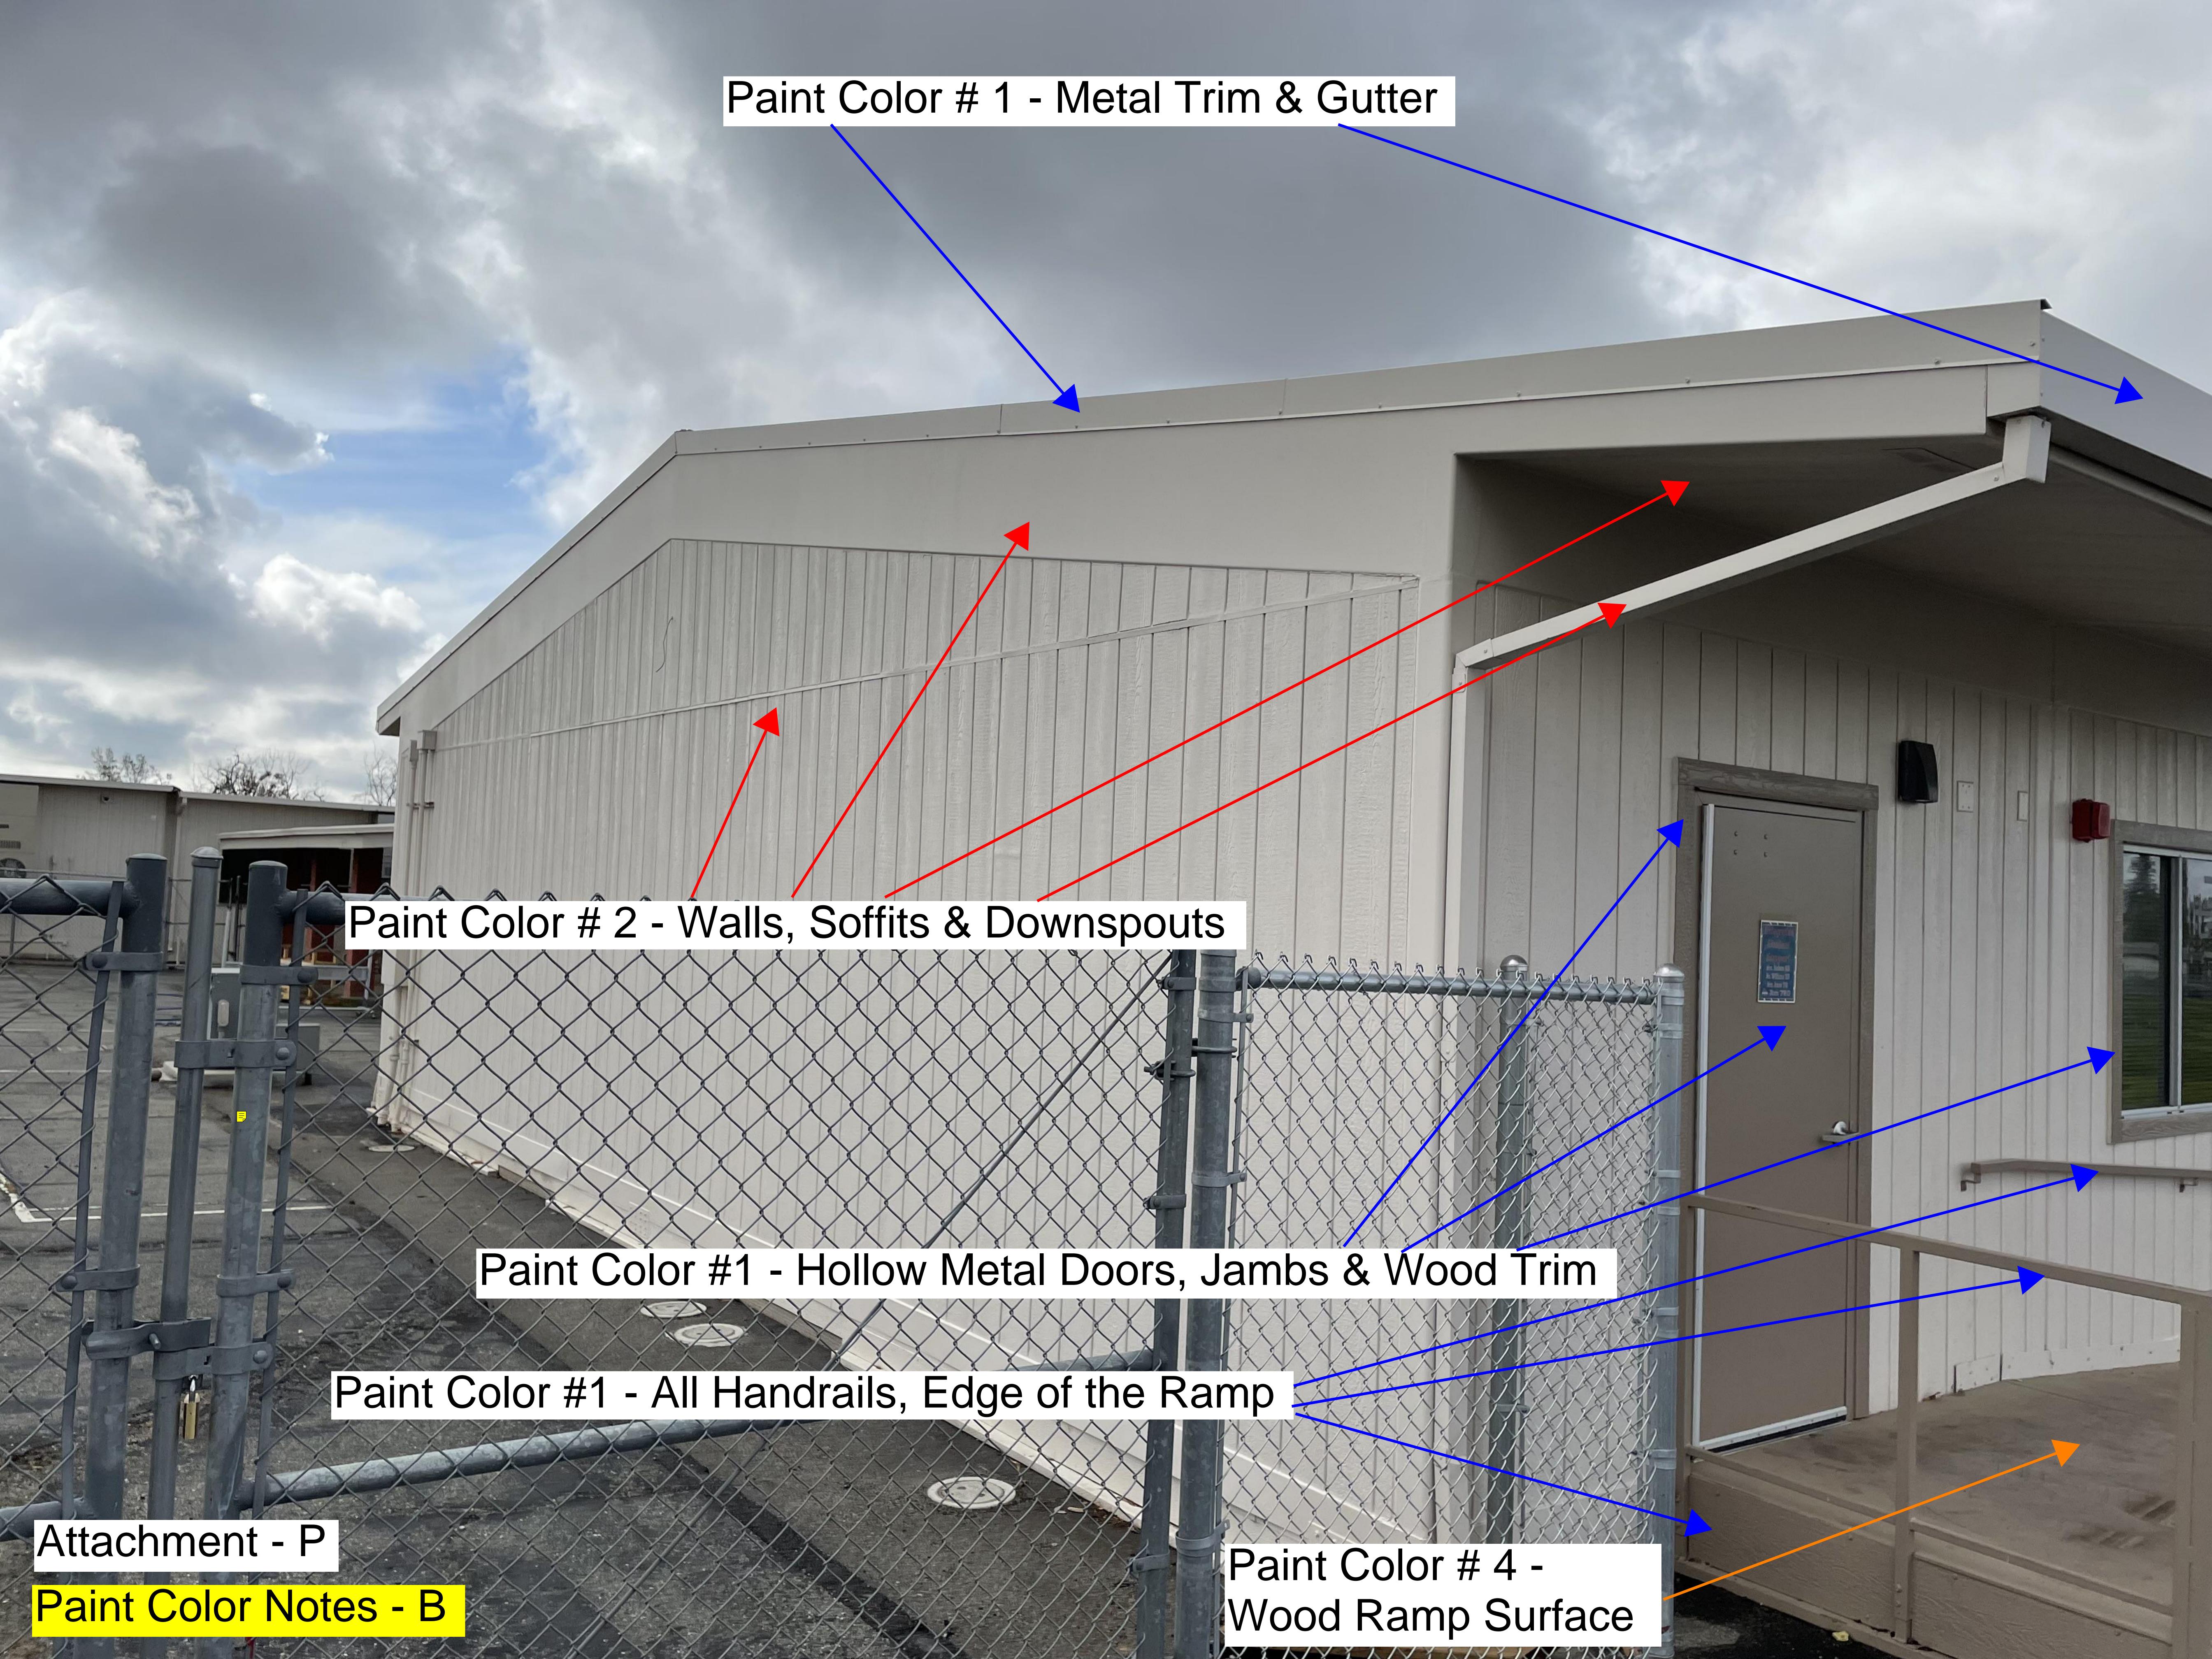

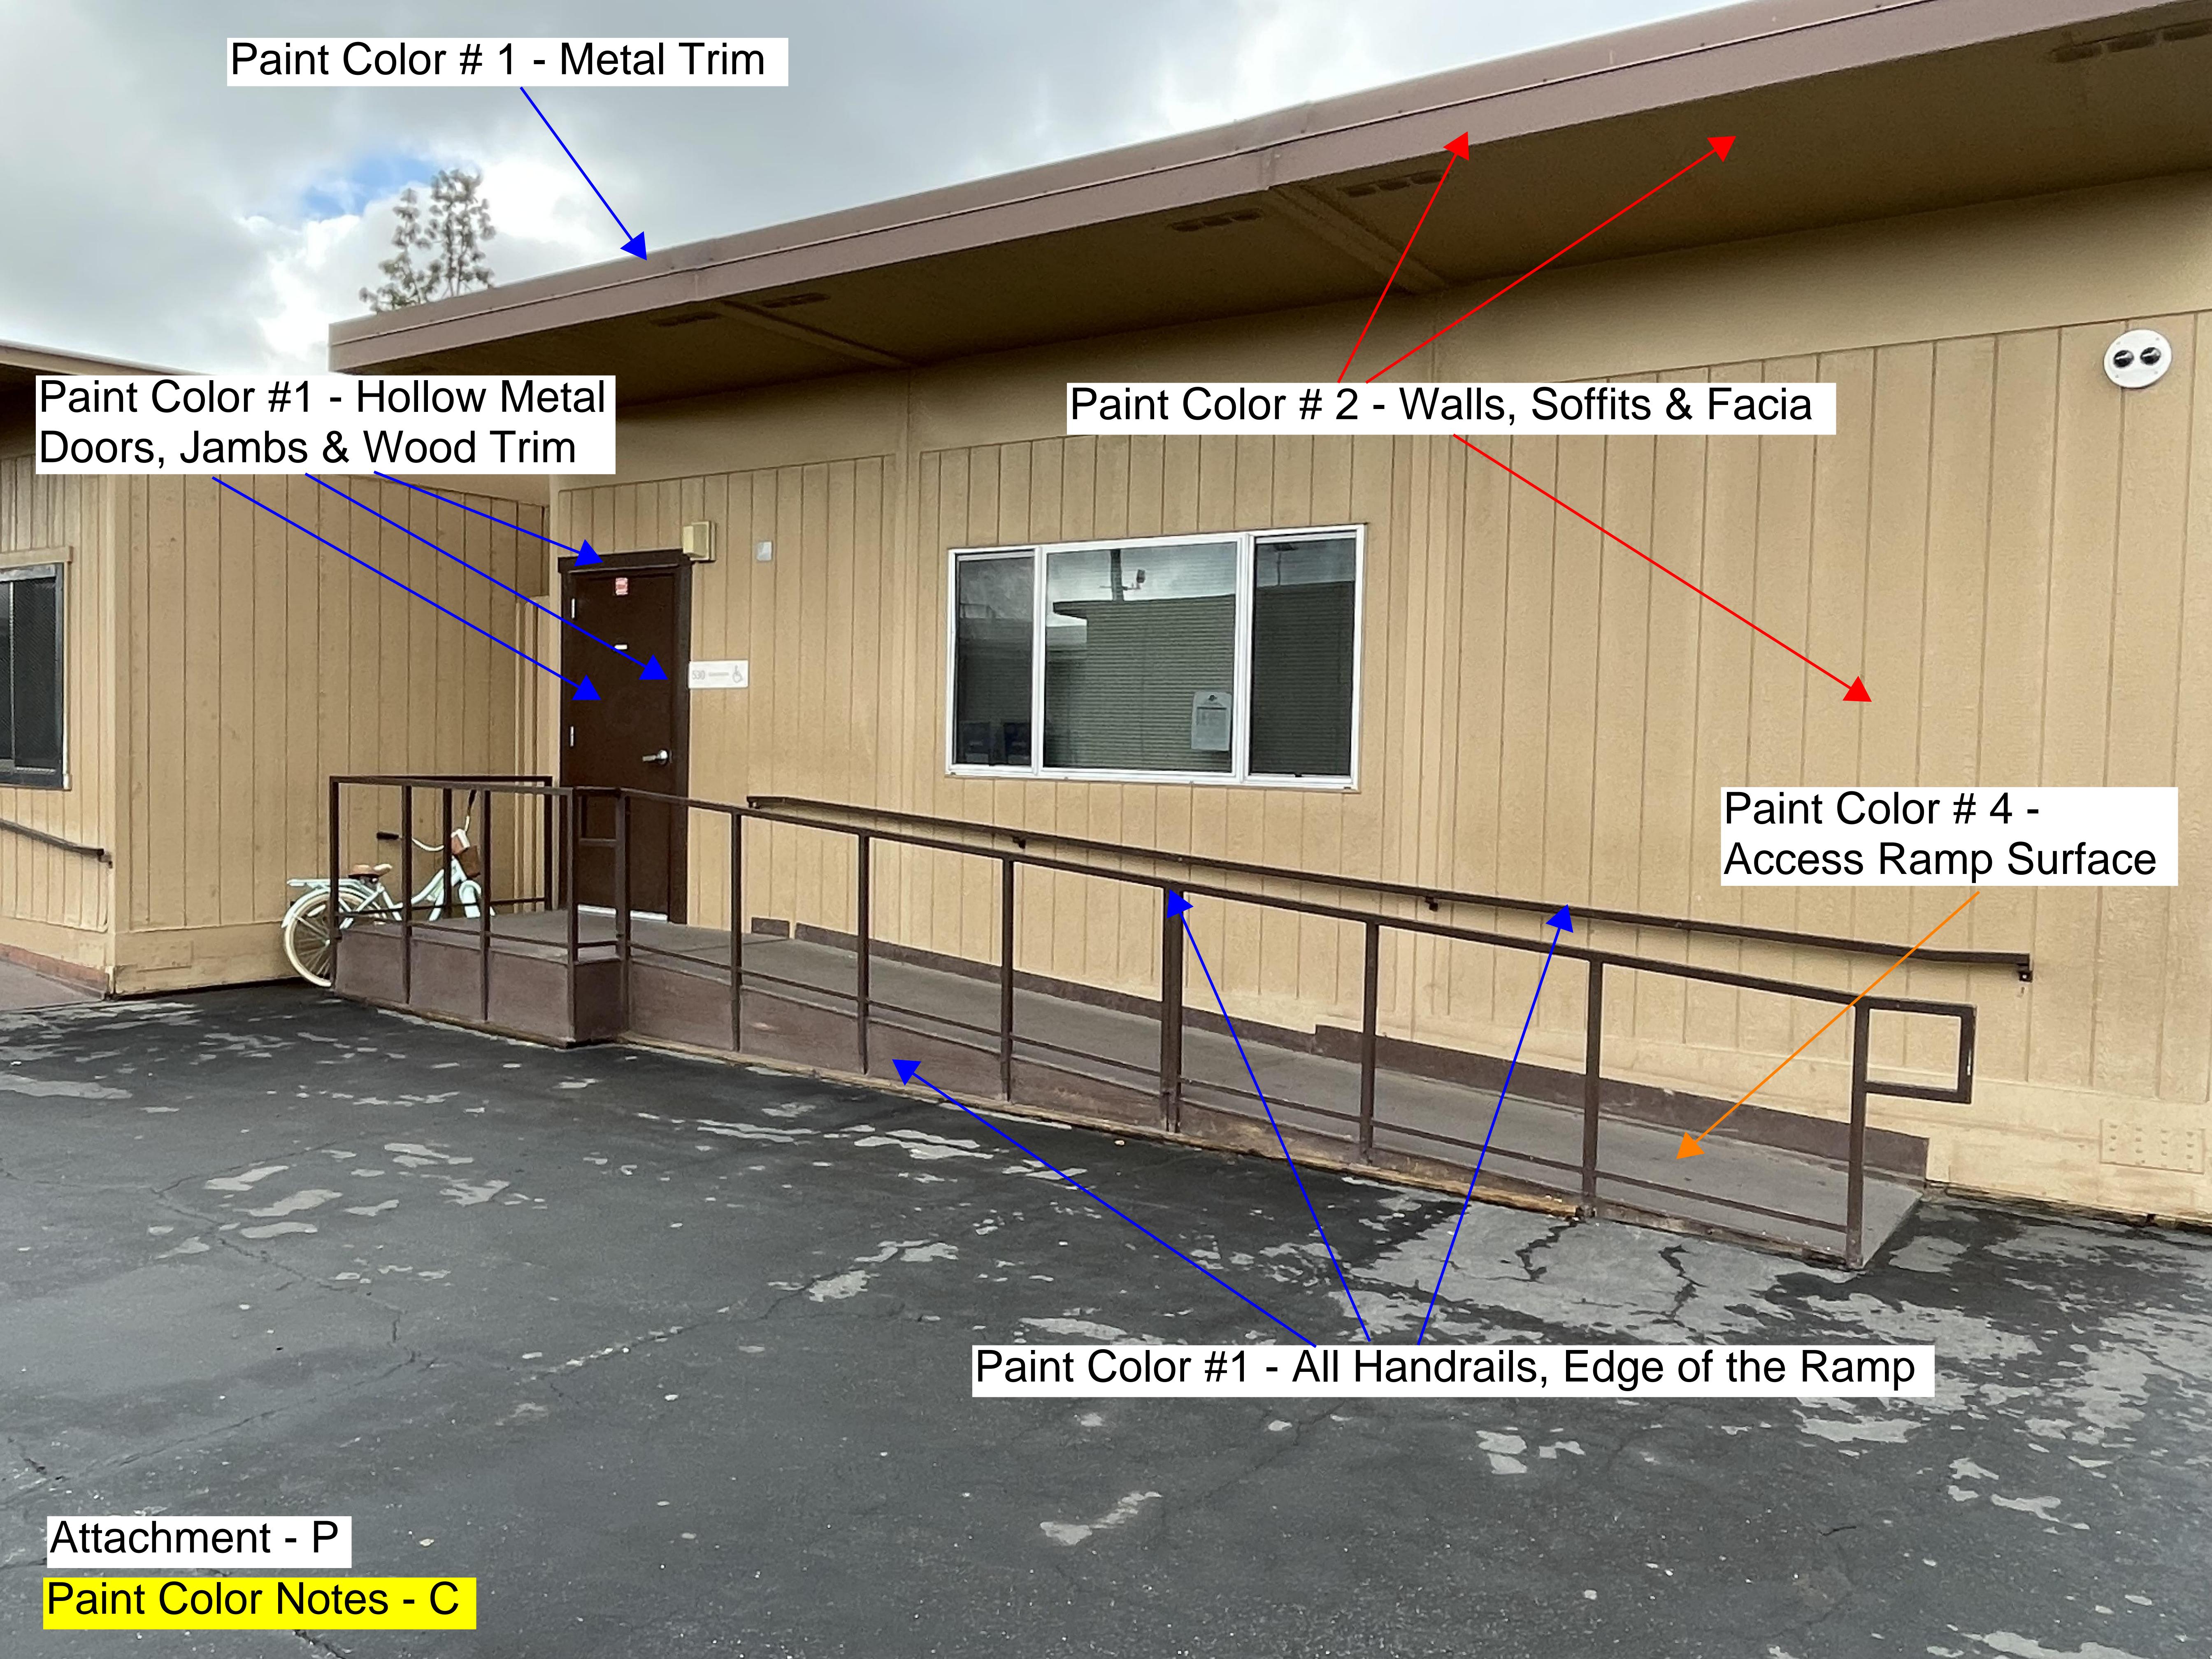

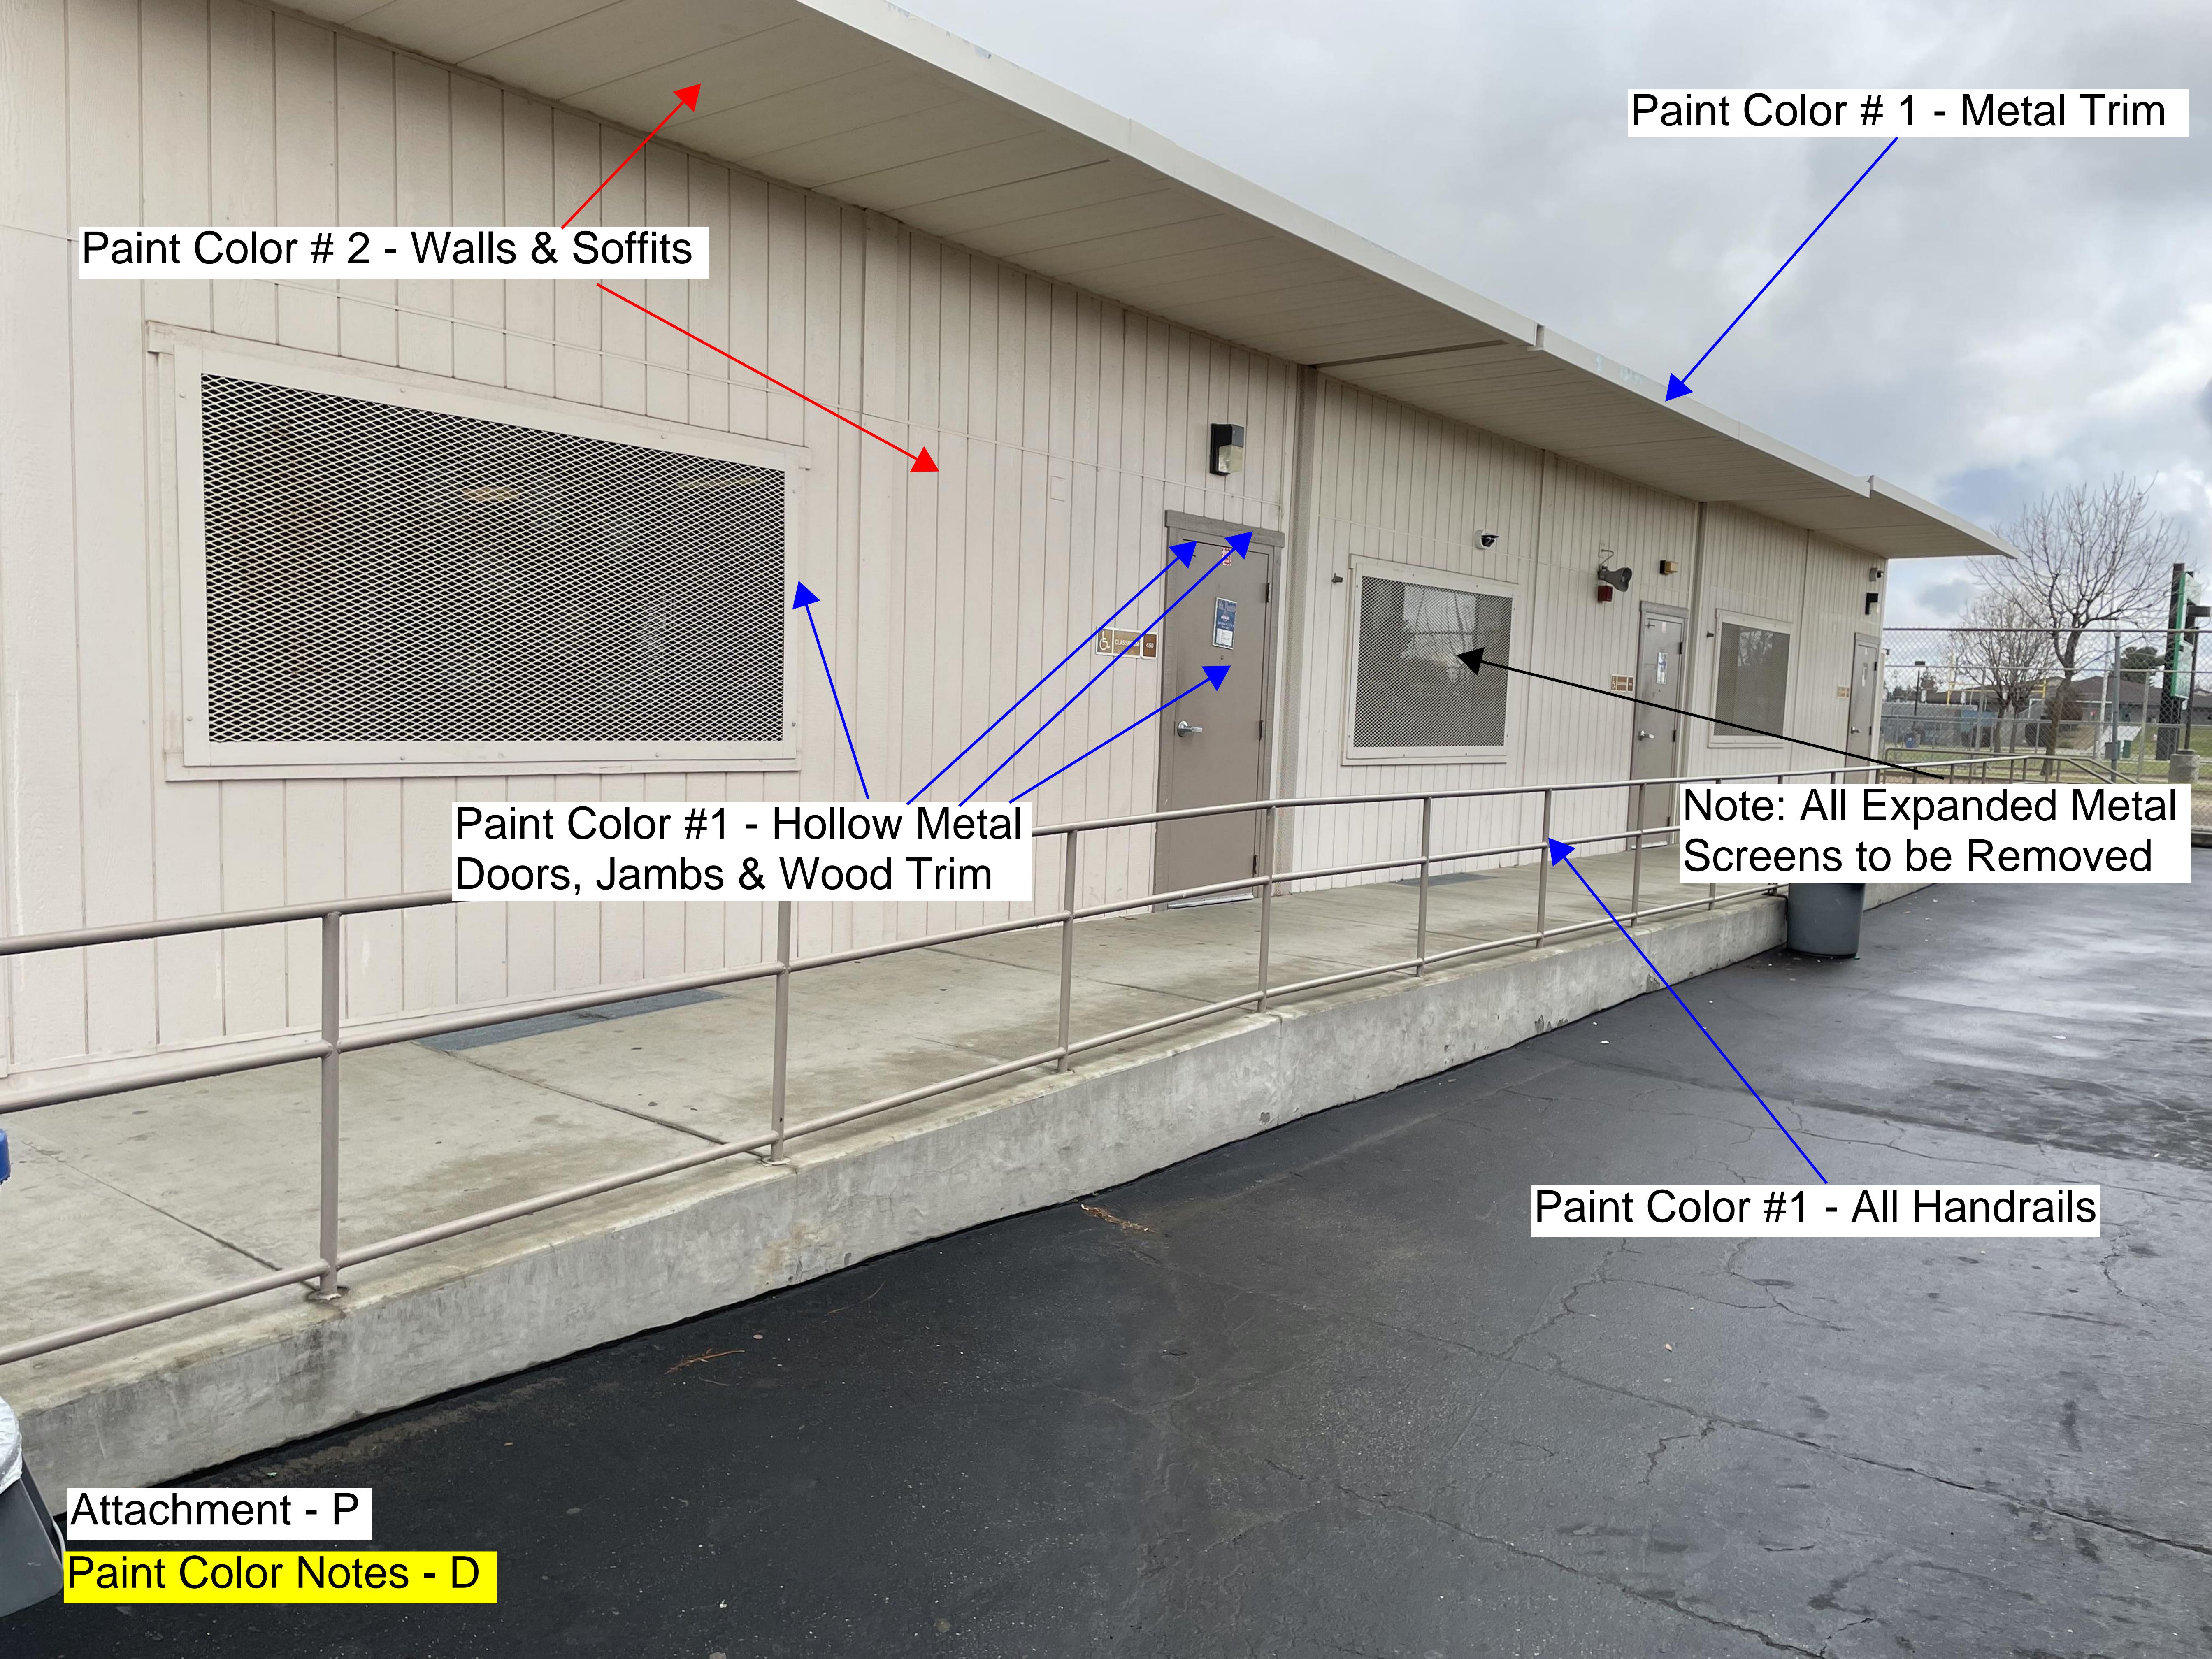

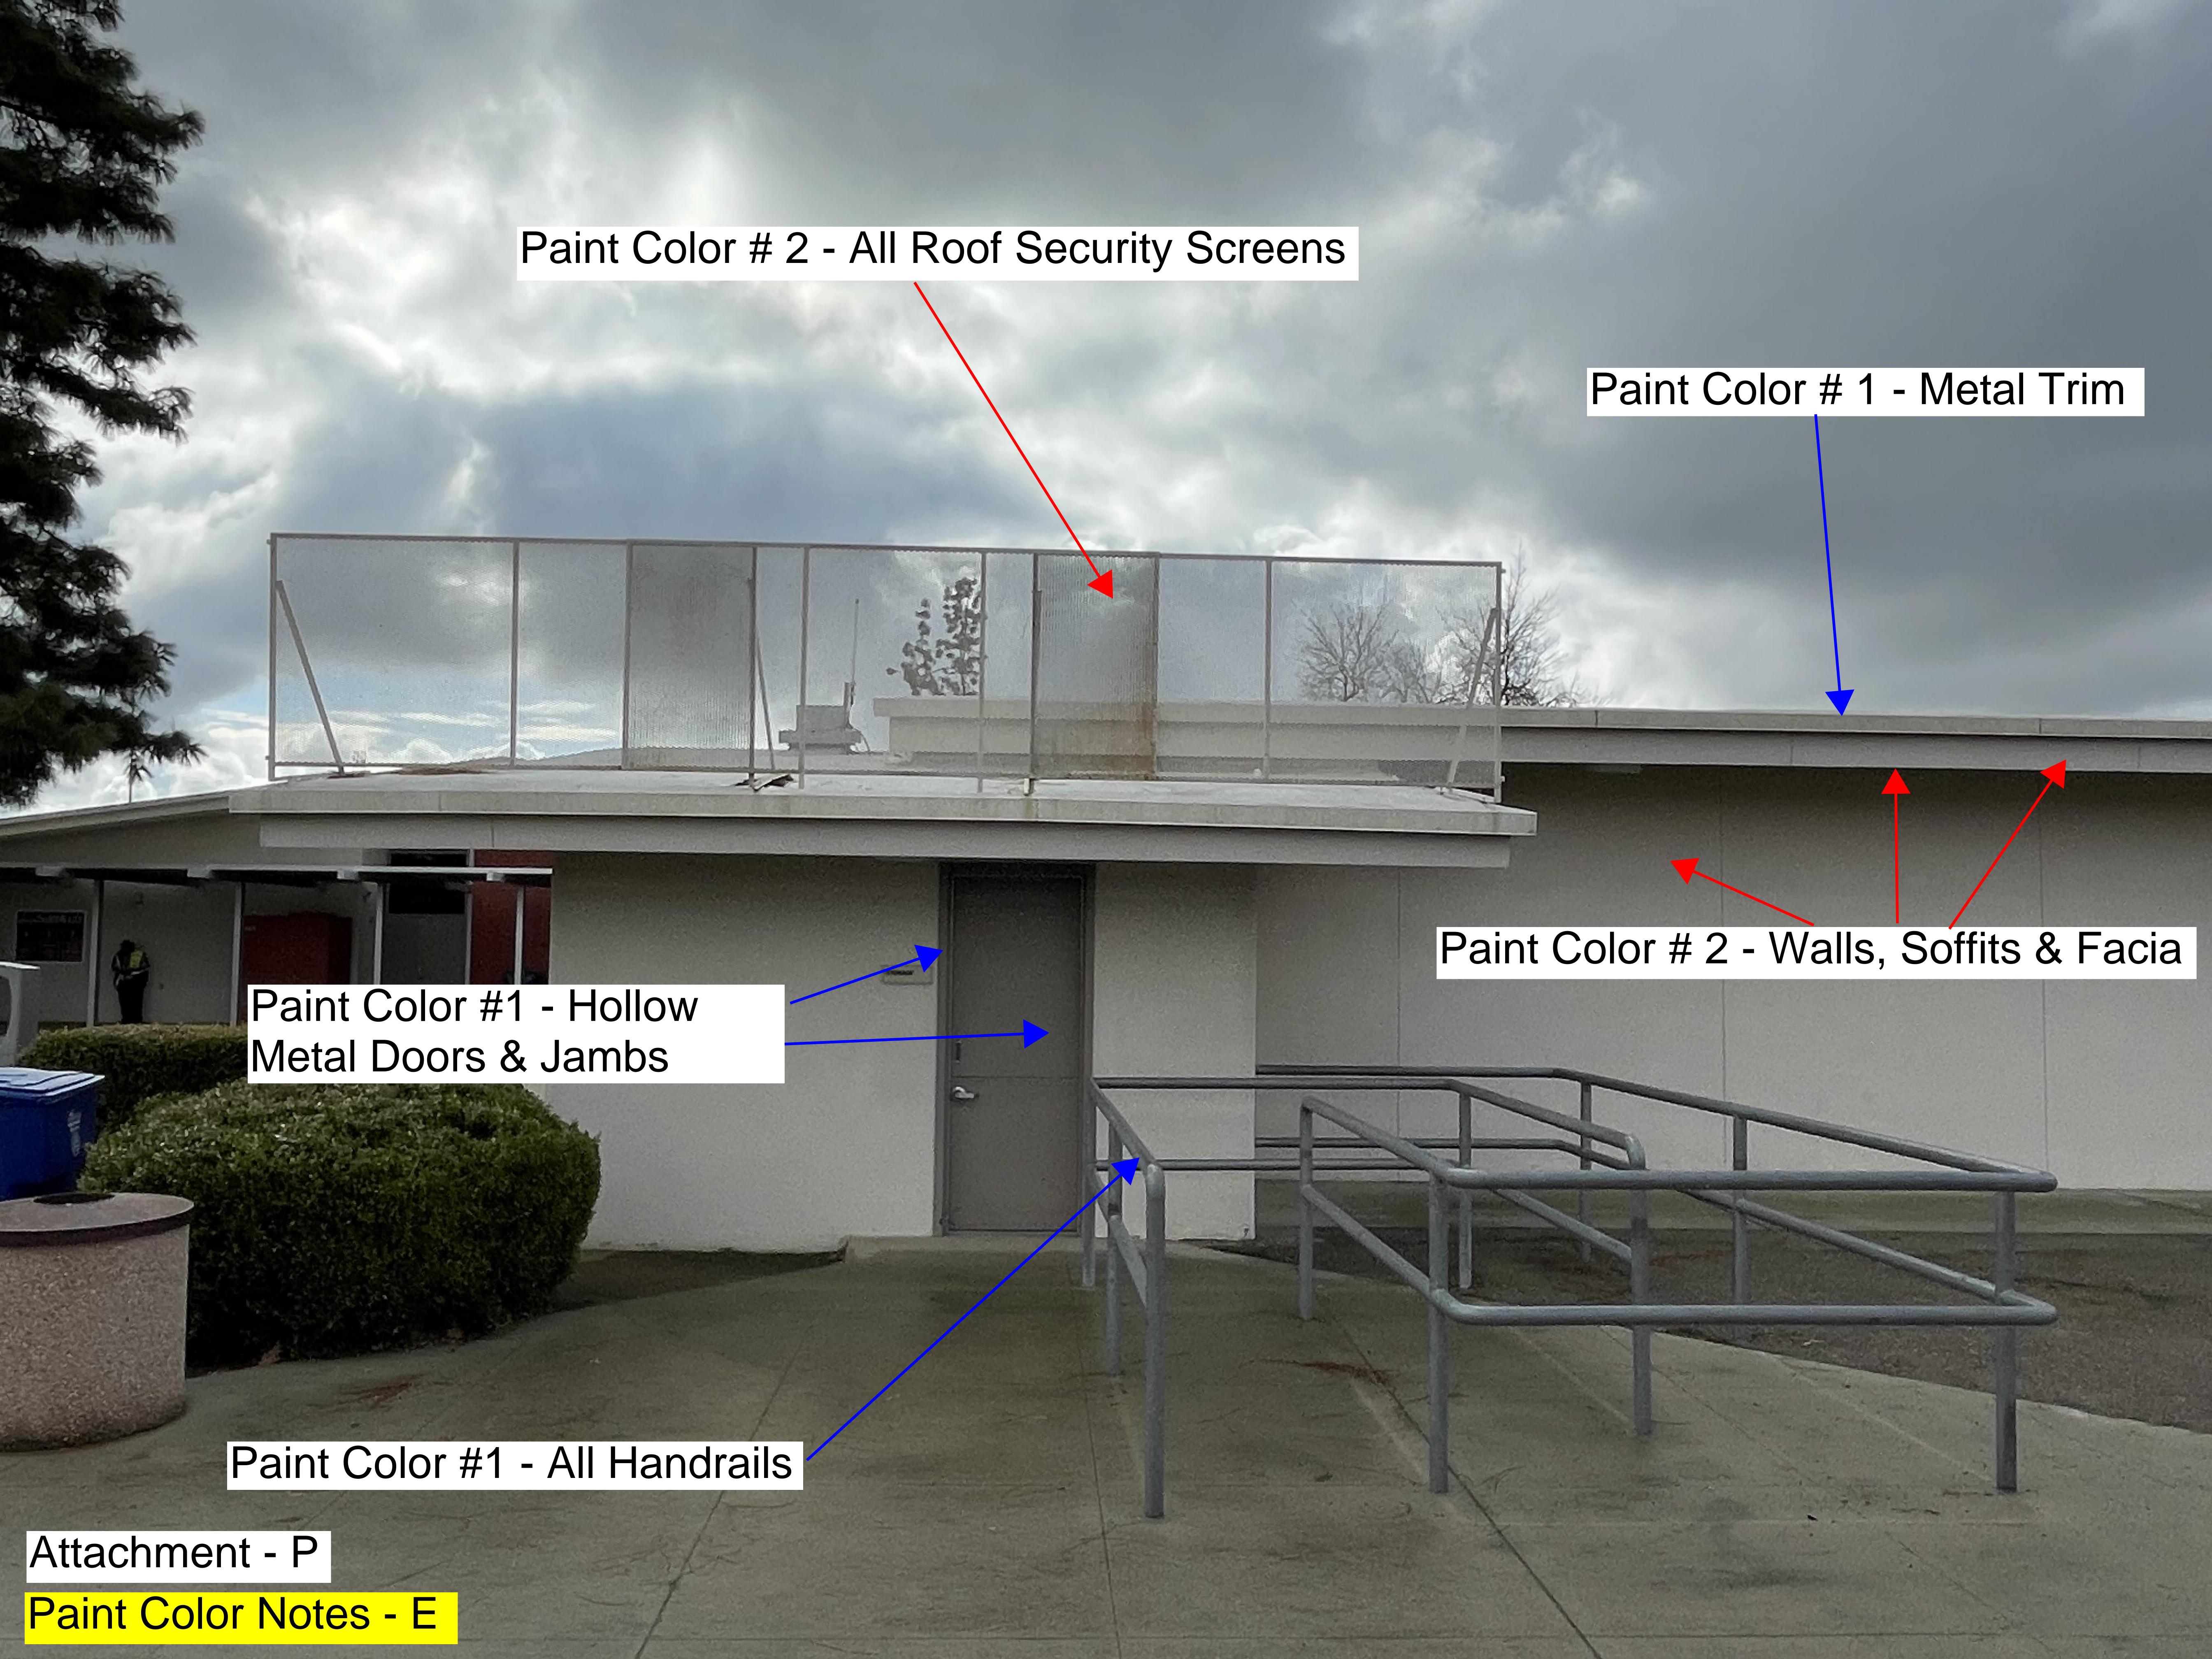



The Best & Last Roof **Coating You'll Ever Use!**



Modified Bitumen

*Not for use on 3-tab asphalt or architectural shingles

 † May require GacoFlex E5320 2-Part Epoxy Primer/Filler. Verify adhesion with AdhesionTestKit.

Note: Colors shown are printed representations of product color. Actual color may vary slightly due to surface texture, application technique and lighting conditions.

Brown

Black

GR1673

Gaco

Red

Compare for Yourself



	GacoRoof	Brand X
Warranty	Limited 50-Year	5-10 Years
Can be applied between 32°F - 120°F	YES	NO
Withstands Permanent Ponding Water	YES	NO
Primer/ Basecoat Required	NO	YES
Re-coating Required	NO	YES

- 2 coat application of same product Brand X requires multiple products
- Withstands permanent ponding water Brand X is 48 hours only
- Temperature application range 32°F - 120°F
 Brand X is 50°F - 90°F
- 1-12 hour cure time, dry to the touch Brand X is 24-48 hours
- 1 gallon = 100 sq. ft. per coat Brand X is 1.5 gallons
- Can be used on flat roofs Brand X requires 1/4" slope
- Can be rained on after 2 hours Brand X requires no rain, dew or fog within 24-48 hours

- Permanently flexible
 Brand X becomes brittle and begins to degrade over time
- Recoat can be done after cure time Brand X may require 24 hours before re-coat
- Silicone Roof Coating

 Brand X sells all acrylic roof coatings
- Ponding waterproof
 Brand X is ponding water resistant
- 50 year warranty
 Brand X 5-10 year warranty
- No polyester mat between coats Brand X requires polyester mat
- UV resistant
 Brand X loses mil thickness due to UV exposure
- 22 mil system
 Brand X is 48-60 mil

