

SPRAYED 1" ASBESTOS FIBRE FOR REQUIRED FIRE RATING - FIELD APPLY (TYP. TOP & BOT C) APPROVED FOR EXT. USE  
 OR ALTERNATE 3 ALBI-CLAD #89, 3/16" THICK APPLIED PER COLUMN DESIGN #6 CALIF. STATE FIRE MARSHALL BULLETIN.

NOTE: SECURE TOP & BOTTOM METAL STUD TRACK W/ 1/4" Ø BOLTS

CLASS "A" NON COMBUSTIBLE CEILING BOARD FOR CLASS APPROVED CEILING SUSPENSION SYSTEM - IN 24" x 48" x 1/2" THICK - ONE HOUR FIRE RATING - W/ U.L. LABEL.


NOTE: Studs and track are roll-formed from .022" Grade C steel conforming to ASTM-A245 and ASTM-A93. Full galvanizing by the hot dip method assures superior protection against rust and corrosion in service and in storage. Each stud is identified by the trade name "Atlas Screw-On Stud" indented in the web to read from top to bottom.

APPROVED STATE FIRE MARSHAL STATE OF CALIFORNIA DATE JUN 20 1966 BY *[Signature]*

AS REVISED OCT 21 1966

1	REVISOR	REVISION
1	REVISOR	REVISION
2	REVISOR	REVISION
3	REVISOR	REVISION

STATE OF CALIFORNIA - DEPARTMENT OF GENERAL SERVICES OFFICE OF ARCHITECTURE AND CONSTRUCTION  
 AS REVISED OCT 21 1966  
 27755 APPROVED JUN 20 1966

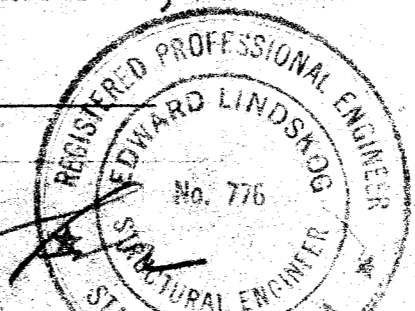

BAKERSFIELD CITY SCHOOL DISTRICT 1500 BAKER - BAKERSFIELD, CALIF. EDUCATION CENTER		JOB NO. <b>753</b>
SCALE: 3/4" = 1'-0"	APPROVED BY: _____	DRAWN BY: HAVILLIE
DATE: MAY 9, 1966		REVISED 6-24-66
MOBILE RENTALS CORPORATION 3823 NORTH BURFEE AVE. EL MONTE, CALIF.		DRAWING NUMBER A-7 OF 8
INTERIOR & EXTERIOR DETAILS		