



Bakersfield City School District
Maintenance, Operations and Facilities Department
1501 Feliz Drive
Bakersfield, California 93307
Office (661) 631-5883 Fax (661) 834-9986

Jason Sitton, Director I sittonj@bcسد.com
Leonard Zasoski Jr., Assistant Director II zasoskil@bcسد.com
Daniel Wastafarro, Assistant Director II wastafarro@bcسد.com
Juan Montelongo, Assistant Director II montelongoj@bcسد.com

April 01, 2026

To: All Bidders
Re: Abatement Projects: Munsey Elementary School Abatement, Flooring & Painting – Addendum No. 01


1. Bid Date Change:
 - Original Bid Date – Thursday, April 9th at 10:00 a.m.
 - **NEW BID DATE – Friday, April 10th at 10:00 a.m.**
2. RFI Date Change:
 - Original RFI Date – Thursday, April 02, 2026
 - **NEW RFI DATE – Monday, April 06, 2026**
3. This addendum adds the Abatement Scope of Work to this project. The attached Abatement reports are hereby incorporated into the contract documents.

Please note that each project must be bid separately and submitted in its own individual sealed envelope. This process ensures that each project is evaluated independently and in accordance with our bid requirements. Please make sure the project name and number are clearly labeled on the outside of each sealed envelope.

Please date, sign and return this form via email to Brenda Orozco at orozcob@bcسد.com.

Date Print Name Signature

Print Company Name

Sincerely,

Leonard Zasoski, Jr.
Assistant Director II
Maintenance, Operations and Facilities
Bakersfield City School District



YES Environmental, Inc.

1201 24th Street, Suite B110-377, Bakersfield, CA 93301 / (661) 527-0820

ASBESTOS ABATEMENT SCOPE OF WORK

Site Information:

Munsey ES – Portable T1, 11A North RR & 11A South RR
3801 Brave Avenue, Bakersfield, CA 93309



Prepared for:

Bakersfield City School District
1300 Baker Street, Bakersfield, CA 93305
(661) 631-5885

Prepared by:

Kristy Yowell, CAC 09-4500 / CDPH LRC-4640
YES Environmental, Inc. (YES)
Project Number 26YES-40
March 2026



YES Environmental, Inc.

1201 24th Street, Suite B110-377, Bakersfield, CA 93301 / (661) 527-0820

ASBESTOS FLOORING ABATEMENT SCOPE OF WORK Munsey ES – Portable T1, 11A North Restroom & 11A South Restroom

PURPOSE OF PROJECT

In order for Bakersfield City School District (BCSD) to replace the flooring throughout portable classroom T1, 11A restroom and 11B restroom, asbestos-containing flooring materials must be abated. In some rooms the ACM is concealed between multiple layers non-asbestos flooring materials which must also be removed. Further, the contractor shall remove the non-asbestos containing coved baseboard and typical vinyl baseboards inside these rooms. The associated baseboard glues are not to be removed.

The contractor is responsible for field verifying their own measurements for bidding, notification, waste characterization, or any other purpose. This Scope of Work should be used in conjunction with all Federal, State and local codes.

IMPORTANT DATES

Project Start Date – Wednesday, June 3, 2026

Abatement Completion Date – Wednesday, June 17, 2026

Clearance Air Sample Collection Date – No later than Thursday, June 18, 2026

Clearance Air Sample Results Expected to be Received Date – No later than Friday, June 19, 2026

Containment Removal Date – No later than Saturday, June 20, 2026

DEFINITIONS

Abatement Activities: precleaning of jobsite, setup of containment/regulated area, removal of asbestos-containing materials and final cleaning inside containment/regulated area in preparation for post abatement clearance air sampling or completion of work visual.

Asbestos-Containing: material containing any detectable amount of asbestos. Acronym ACM.

Lead-Containing: material containing any detectable amount of lead. Acronym LCP or LBP.

Remediation Activities: precleaning of jobsite, setup of containment/regulated area, removal or disturbance of any sort of lead-containing materials and final cleaning inside containment/regulated area in preparation for job completion visual inspection by consultant.

Contractor: Remediation contractor, abatement contractor or any trade qualified to conduct the work described in this Scope of Work.

Consultant: BCSD's environmental consultant.

WORK PERIOD

The contractor shall have fifteen (15) calendar days to complete all of the abatement activities portion of this project. Clearance air samples will be collected the day following completion of abatement activities. Removal of containment shall occur the next calendar day immediately following the receipt of passing clearance air samples.

SEQUENCE OF WORK

The contractor shall complete all work in T1 building before commencing with abatement in the restrooms.



YES Environmental, Inc.

1201 24th Street, Suite B110-377, Bakersfield, CA 93301 / (661) 527-0820

ASBESTOS CONTENT & LOCATIONS

See attached initial inspection report for the locations, quantities and materials tested for asbestos content.

NOTIFICATIONS

The contractor shall be responsible for the submission of an asbestos notification and renovation permit form to San Joaquin Valley Air Pollution Control District, Cal/OSHA and all other notifications triggered by asbestos removal. Contractor shall pay any associated fee based on measurements and material quantification as determined by the contractor.

SUPERVISOR & WORKER TRAINING REQUIRED

ASBESTOS

Workers and supervisors disturbing asbestos shall have AHERA accredited training as asbestos workers or contractor supervisors. Any exceptions to these training requirements shall be submitted to the consultant and building owner representative for review and await on approval before commencing with disturbance of ACM.

PRE-JOB SUBMITTAL REQUIREMENTS

A hard copy of the contractor's pre-job submittal packet shall be submitted to YES, Inc. and:

1. Include all of the items listed in the attached Submittal Requirements;
2. Be provided to and approved by YES, Inc. prior to the start of work by the contractor.
3. Manifests shall be submitted to the consultant on the first day of the project for review, and also for final approval prior to waste removal from the job site.
4. Double sided copies are not acceptable.
5. Delays in providing the required submittals may affect the start of the project.
6. Electronic submittals will not be accepted.

OTHER CONSIDERATIONS

Item	District Provided	Contractor Must Provide	Not Applicable / Required
Water	X		
Power	X		
Removal of Items to be saved	X		
Removal & Disposal of Items Remaining in Work Area		X	
Safety & Security of Equipment		X	
Challenge testing of HEPA filtered equipment to have been performed within 3 business days of the start of the project		X	

ALLOWABLE FORMS OF COMMUNICATION

The contractor shall establish a means of communication between the supervisor and workers inside the containment/regulated area which includes two-way radios or equivalent. At no time will yelling, whistling or banging on containment, walls or on the decontamination chambers be allowed as a form of communication.

OCCUPANCY

This building will be unoccupied in the areas where abatement is occurring. Other areas nearby, but outside of the abatement containment, may be occupied by staff, students, and other trades conducting work at this site.



YES Environmental, Inc.

1201 24th Street, Suite B110-377, Bakersfield, CA 93301 / (661) 527-0820

WASTE BIN/CONTAINERS

All bins/containers brought on-site to deposit waste into must be lockable or securable. Bins shall be secured at the end of every shift. Plywood shall be placed under the wheels of each bin to protect the existing surface. Bins must be double lined with 6-mil poly prior to waste being deposited. Containers must have the appropriate labels affixed on them as soon as any asbestos-contaminated debris is deposited.

CONTAINMENT/REGULATED AREA SETUP REQUIREMENTS

Containment setup requirements for all containments/regulated areas:

1. All the rooms associated with T1 shall be set up as a single containment.
2. 11A Restroom shall be set up as a single containment.
3. 11B Restroom shall be set up as a single containment.
4. Thresholds shall be removed and discarded.
5. All poly used on this project shall be a minimum of 6-mil thickness and flame retardant. All critical barriers shall be sealed prior to any installation of poly on the walls or false ceiling.
6. Contractor shall exhaust the negative air unit exhaust hoses through areas approved by the consultant. Contractor SHALL NOT exhaust through lower windows.
7. All containments shall be built to accommodate the proper opening/closing function of the doors leading to each classroom.
8. The containments and regulated areas shall have, at a minimum, a two-stage decontamination chamber setup which meets the following conditions:
 - o Must be adjacent to the regulated area/containment for the decontamination of employees and their equipment used inside the regulated area/containment;
 - o The chamber farthest away from the regulated area/containment shall be designed for employees to don PPE before entering the regulated area/containment; to don street clothes upon exiting the regulation area/containment; and storage of other necessary items of the employees which cannot enter the regulated area/containment.
 - o The chamber most adjacent to the regulated area/containment shall be designed for the person exiting the regulated area/containment to use water, soap, and towels to decontaminate any part of their bodies and PPE such as their respirator.
 - o Both chambers shall be of sufficient size to accommodate cleaning of equipment and removing personal protective equipment without the spreading of contamination beyond the area (as determined by visual accumulations).
9. All those entering the containments must sign in on an entry/exit log that documents their entrance and exit times. This record is to also include lunch times and other breaks.
10. The consultant must give final approval for containment setups before abatement commences.
11. As work continues, the contractor shall assure that any additional critical barriers discovered are sealed immediately.
12. The contractor shall continually inspect the containments for deficiencies or breaches. If any are discovered, all abatement activities shall halt immediately until the deficiencies are fixed or repaired satisfactorily. These incidents shall be reported to the consultant immediately.
13. The contractor shall exercise caution to ensure setup of containment does not damage in any way data cabling, electrical conduits, tackboards, smart-boards, etc.
14. If the setup of the containments requires questionable installation, the District and Consultant shall be asked in writing and approval must be given in writing prior to work being performed.

WORKER PROTECTION

The contractor shall provide respiratory protection as outlined in current Cal/OSHA regulations. However, at a minimum:

1. During the removal and detail cleaning, workers shall wear a half-face negative-pressure respirator with P-100 HEPA cartridges.
2. Quality disposable coveralls such as Tyvek-like suits and eye protection shall be worn by all workers during all remediation activities on this project. Exceptions to this must be submitted to consultant in writing for review/approval.



YES Environmental, Inc.

1201 24th Street, Suite B110-377, Bakersfield, CA 93301 / (661) 527-0820

3. Should personal air monitoring results not be received the Wednesday immediately following week after being collected, the asbestos consultant reserves the right to require the workers to don PAPRs until personal air monitoring results are received.

NEGATIVE PRESSURE & HEPA FILTERED EQUIPMENT REQUIREMENTS

1. Challenge testing is required on equipment using HEPA filters (see Other Considerations above). Units arriving dirty or appearing to be contaminated shall be removed from the project site. Units must be positioned in the standard upright manner in which the manufacturer designed the equipment to operate.
2. The contractor shall ensure that sufficient negative air units are used to create a minimum air pressure differential of -0.030" and recorded on a manometer. Negative air units shall run continuously until clearance has been achieved. All air filtration devices shall remain sealed when not functioning. All units shall discharge to the exterior of the building during abatement activities.
3. At the end of each shift, if containment cannot be secured while exhausting to the exterior of the building, the contractor shall put the negative air units in scrub mode overnight. At the beginning of each shift, the contractor shall re-establish negative pressure in each containment.

ASBESTOS ABATEMENT & LEAD DISTURBANCE PROCEDURES

Abatement procedures for all ACM on this project:

1. Prior to the disturbance of any asbestos-containing materials, all soft demolition must have been performed and completed. This includes, but is not limited to, walls (to be done by the district), thresholds and other items scheduled to be demolished.
2. In T1 building, the contractor shall remove all layers of flooring beginning with the surface layers, sub-floors, concealed ACM and the contaminated materials below. The only remaining floor components will be the floor joists. Should any debris fall down into the space below the floor joists during the removal of all of the flooring systems, the contractor shall perform the cleanup and removal of the debris. Efforts should be made on the first day on-site to prevent and forecast the possibility of fall-through of debris. All fasteners shall be removed including but not limited to nails, screws & staples.
3. In 11A north & 11A south restrooms, the contractor may commence with removal of the surface layers of flooring after containment setup is complete and has been approved by the consultant. Once all of the sheet flooring and floor tile is removed, the contractor shall remove the mastic using chemical stripping process.
4. Wet all ACM with an amended water solution using equipment capable of providing a fine spray mist, in order to reduce airborne-fiber concentrations when the material is disturbed.
5. The ACM must be double bagged in poly bags. An acceptable alternative is disposal of ACM into a single poly bag which is placed into a leak-tight drum for disposal.
6. Bags should be securely sealed to prevent accidental opening and leakage by tying tops of bags in an overhand knot or by taping in gooseneck fashion.
7. Contractor shall generate only as much debris as they can bag and deposit into a waste bin at the end of an 8-hour shift.
8. After completion of all stripping work, surfaces from which asbestos-containing materials have been removed shall be wet-wiped or cleaned by some equivalent method to remove all visible residue. If it is quicker and more cost effective to discard the entire component as ACM, contractor must submit for approval prior to the job commencing to the consultant and building owner.
9. Asbestos-contaminated waste that has been containerized shall be transported out of the work area through the worker decontamination enclosure or through an approved pass-out arrangement.

PROHIBITED WORK PRACTICES

1. Uncontrolled releases. This is cause for stopping the project until modified work practices and containment that prevent these releases from occurring are designed and implemented.
2. Dry removal or dry disturbance of any kind.
3. Mechanical tools without HEPA vacuum attachment and HEPA vacuum properly attached according to manufacturer recommendation.
4. No brooms are allowed inside containment.
5. Bulk loading.



YES Environmental, Inc.

1201 24th Street, Suite B110-377, Bakersfield, CA 93301 / (661) 527-0820

COMPLETION OF ABATEMENT & CLEARANCE AIR SAMPLES

1. After final cleaning of any interior containment of a building intended to be reoccupied has been completed, a visual clearance inspection shall be performed by the consultant. Contractor personnel shall be present and available to address any deficiencies in cleaning. On the business day following visual clearance of the containment, a set of five clearance air samples shall be collected to be analyzed by Transmission Electron Microscopy (TEM) or Phase Contrast Microscopy (PCM).
2. Where TEM clearance criteria is used, final clearance for re-occupancy shall be contingent upon meeting AHERA criteria for response action completion of an average of 70 structures per square millimeter (70 s/mm²) or less for the 5 samples collected inside the containment (40 CFR 763, Appendix A). In the event clearance air samples do not meet this re-occupancy criteria, the contractor shall be responsible for re-cleaning failed areas, and for costs associated with collection and rush analysis of additional clearance air samples (\$2,450/per set of clearances) in accordance with the sampling protocol described above.
3. Where PCM clearance criteria is used, final clearance for re-occupancy shall be contingent upon meeting AHERA criteria for response action completion when the results of the samples collected show that the concentration of fibers for each of the five samples is less than or equal to a limit of quantitation for PCM (0.01 fibers per cubic centimeter (0.01 f/cm³) of air). In the event clearance air samples do not meet this re-occupancy criteria, the contractor shall be responsible for re-cleaning failed areas, and for costs associated with collection and rush analysis of additional clearance air samples (\$1,500/per set of clearances) in accordance with the sampling protocol described above.

PERSONAL AIR MONITORING RESULTS FOR WORKERS

The contractor shall promptly post and provide a copy of worker personal air monitoring results in compliance with Cal/OSHA requirements to the consultant. No more than five working days shall pass between results being received and posted on-site or provided to YES as part of the close-out documentation for this project.

ASBESTOS DISPOSAL

The wood, rubber/vinyl baseboards, floor tiles and associated non-asbestos containing glue can be discarded as either construction debris or non-friable, non-hazardous, asbestos-containing waste, manifested and disposed of accordingly.

Any surface level flooring materials which are able to be removed from containment before any asbestos-containing materials are disturbed can be discarded as construction debris.

Any asbestos-containing materials removed by manual methods shall be considered non-friable, non-hazardous, asbestos-containing waste, manifested and disposed of accordingly.

Asbestos-containing materials removed by mechanical means shall be considered hazardous, asbestos-containing waste, manifested and disposed of accordingly.

Attachments:

- A. Submittal Requirements
- B. Chemsafe Clear Safety Data Sheet
- C. Initial Inspection Report



YES Environmental, Inc.

1201 24th Street, Suite B110-377, Bakersfield, CA 93301 / (661) 527-0820

Attachment A – Submittal Requirements



YES Environmental, Inc.

1201 24th Street, B110-377, Bakersfield, CA 93301 / (661) 527-0820

Asbestos Submittal Requirements

Note: not all of the items listed below are applicable for every project. Only the items applicable are required to be included in the submittal packet.

Prestart Submittals

1. Contractor's license(s)
 - a. CSLB license with asbestos certification
2. DOSH registration
3. Notifications
 - a. Appropriate local EPA enforcement agency for the job site location.
 - b. Cal/OSHA asbestos notification
 - c. Equipment rented
 - i. Proof the rental company has been made aware the rented equipment will be used for asbestos and/or lead related work.
4. Site specific safety/emergency plan
 - a. This must include, but is not limited to, the nearest hospital's phone number and address;
 - b. Local police department phone number and address;
 - c. Title, name and phone number of the contractor's contact whom should be contacted in the event of an emergency.
5. Contractor worker documentation for all workers on-site
 - a. Proof of AHERA training
 - b. Proof of Medical approval to wear a respirator
 - c. Respirator fit test
6. Contractor's respiratory protection program
7. Challenge testing certificates
8. Negative exposure assessment (if requesting to don lesser PPE than specified in the SOW)
9. Safety data sheets all hazardous materials (as defined by Cal/OSHA)
10. Waste Disposal
 - a. Paperwork for landfill proving the landfill will accept the waste
 - b. Proof of licensed waste hauler and company for hazardous waste
 - c. Waste characterization of lead waste
 - d. Manifest for all types of waste to be generated

Submittals Required During the Project

1. Daily copies
 - a. Safety meeting (if held daily)
 - b. Worker roster of all employees onsite – regardless of training
 - c. Entry/exit log for employees entering/exiting containment/regulated area
2. Weekly
 - a. Safety meeting
 - b. Worker personal air monitoring
 - c. Area air monitoring

Submittals Required at the Conclusion of the Project

1. Contractor air monitoring & laboratory results (refer to the SOW for required frequency)
2. Any other paperwork as requested by the Consultant or Building Owner



YES Environmental, Inc.

1201 24th Street, Suite B110-377, Bakersfield, CA 93301 / (661) 527-0820

Attachment B – Chemsafe Clear Safety Data Sheet

ISSUE DATE: 1/15/1990

REVISION DATE: 4/15/2015

1. PRODUCT AND COMPANY IDENTIFICATION**GHS PRODUCT IDENTIFIER:**

TRADE NAME; CHEMSAFE CLEAR (CARB COMPLIANT)

OTHER MEANS OF IDENTIFICATION:**RECOMMENDED USE OF THE CHEMICAL AND RESTRICTIONS ON USE:**

RECOMMENDED USE: Mastic Removal

SUPPLIER'S DETAILS:

1480 GRANDVIEW AVE.
THOROFARE, NJ 08086
(800)767-6933

EMERGENCY PHONE NUMBER:

COMPANY PHONE NUMBER: (800)767-6933

(24HR) EMERGENCY NUMBER: CHEM-TREC (800)424-9300

2. HAZARD IDENTIFICATION**GHS CLASSIFICATION:**

GHS CLASSIFICATION SCALE: 1=SEVERE HAZARD, 4=SLIGHT HAZARD)

ASPIRATION HAZARD
SERIOUS EYE DAMAGE IRRITATION

CATEGORY 1
CATEGORY 2A

LABEL ELEMENTS:**SIGNAL WORD: DANGER****HAZARD STATEMENTS:**

Causes serious eye irritation
May be fatal if swallowed and enters airways

HAZARD SYMBOLS:**PRECAUTIONARY STATEMENTS:**

Keep out of reach of children
 Wash hands, face and all exposed skin areas after handling.
 Wear protective gloves/protective clothing/eye protection/face protection

PRECAUTIONARY STATEMENTS (RESPONSE):

IF SWALLOWED: Immediately call a poison center or doctor or physician. Do not induce vomiting.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if easy to do. Continue rinsing. If eye irritation persists, get medical advice/attention.

PRECAUTIONARY STATEMENTS (STORAGE):

Store locked up.

PRECAUTIONARY STATEMENTS (DISPOSAL):

Dispose of contents/container to an approved waste disposal plant in accordance with applicable local/regional/national and international regulations and product characteristics at time of disposal.

OTHER HAZARDS:

Repeated or prolonged exposure can cause skin dryness or cracking.

3. COMPOSITION INFORMATION ON INGREDIENTS

INGREDIENT IDENTITY	CAS NUMBER	PERCENTAGE
DISTILLATES, PETROLEUM HYDROTREATED, LIGHT	64742-47-8	PROPRIETARY
BUTOXYDIGLYCOL	112-34-5	PROPRIETARY

REMAINING INGREDIENTS ARE NOT REPORTABLE UNDER OSHA/SDS GUIDELINES. THE EXACT PERCENTAGES OF SOME INGREDIENTS HAVE BEEN WITHHELD AS (CBI) CONFIDENTIAL BUSINESS INFORMATION TRADE SECRET.

4. FIRST AID MEASURES

INGESTION: If swallowed, wash out mouth with water. Do not induce vomiting, this product is an aspiration hazard. If spontaneous vomiting occurs, keep head below hips to prevent aspiration of liquid into the lung. Never give anything by mouth to an unconscious person.

SKIN CONTACT: Remove contaminated clothing. Wash with soap and plenty of water for 15 minutes. Wash contaminated clothing before reuse. If irritation occurs get medical advice.

INHALATION: Move individual away from exposure and into fresh air. If breathing is irregular or stopped, administer artificial respiration. In case of shortness of breath, give oxygen. Call a physician immediately.

EYE CONTACT: Rinse cautiously with water for several minutes. Remove contact lenses if easy to do. Continue rinsing. If eye irritation persists, get medical attention/advice.

Most Important Symptoms and Effects, Acute and Delayed

INGESTION: Symptoms may include diarrhea, gastric pain, and vomiting.

SKIN CONTACT: Symptoms may include redness, dryness and cracking of skin.

INHALATION: Not expected; however, symptoms may include irritation of respiratory tract and/or CNS symptoms such as dizziness, confusion, drowsiness or fatigue.

EYE CONTACT: Symptoms may include stinging, tearing, redness and blurred vision.

Indication of immediate medical attention and special treatment needed, if necessary.

Treat Symptomatically.

5. FIRE FIGHTING MEASURES

Suitable extinguishing media: Use fire extinguishers suitable for surrounding fire, possibly consisting of water spray, dry chemical, carbon dioxide, or foam.

Unsuitable extinguishing media- Do not use water jet.

Specific hazards arising from the chemical: In a fire or if heated, a pressure increase will occur and the container may burst. Material will burn in a fire. Flash point is over 200F. Material will emulsify and not directly float with water spray and emulsion could aid in not exacerbating fire.

Hazardous thermal decomposition products: carbon monoxide and CO₂

Special protective actions for fire-fighters: Keep product containers and surrounding areas cool with water spray. No action shall be taken involving any personal risk or without suitable training.

Special protective equipment for fire-fighters: Fire fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures:

For non-emergency personnel: No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Provide adequate ventilation. Avoid breathing vapor or mists. Put on appropriate personal protective equipment. Wear appropriate respirator when ventilation is inadequate.

For emergency responders: If specialized clothing is required to deal with the spillage, take note of information in section 8 for further information. See also information in non-emergency personnel above.

Environmental precautions: Avoid dispersal of spilled material with soil, waterways, drains and sewers. See section 12 for additional ecological information.

Methods and materials for containment and cleaning up.

Small spill: Stop leak if without risk. Move containers from the spill area. Absorb with an inert dry non combustible material such as diatomaceous earth or vermiculite and place in an appropriate waste disposal container. Mop any remaining residues with soap and water and dispose of wastes via a licensed waste disposal contractor according to federal, state and local regulations.

Large spill: Stop leak if without risk. Move containers from spill area. Prevent entry into sewers, drains, water courses and confined areas. Wash spillages into an effluent treatment plant or absorb with an inert dry non combustible material such as diatomaceous earth or vermiculite and place in a appropriate waste disposal containers. Mop any remaining residues with soap and water and dispose of wastes via a licensed waste disposal contractor according to federal, state and local regulations.

7. HANDLING AND STORAGE

Precautions for Safe Handling:

Safe Handling Advice: Utilize appropriate personal protective equipment when handling product. Do not swallow. Avoid contact with eyes, skin and clothing. Avoid breathing vapor or mists. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container and tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. No smoking. Wash face, hands and any exposed skin thoroughly after handling. Wear protective gloves/protective clothing/eye protection and face protection during use. Emptied containers can contain product residues and remain hazardous. Do not reuse, flame cut, braze or weld container and observe all sds information around empty containers and dispose of in accordance with federal, state and local regulations.

Advice on general occupational hygiene: Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also section 8 for additional hygiene information.

Conditions for safe storage including any incompatibilities:

Store in original container in a dry, cool and well ventilated area away from strong oxidizing agents (see section 10) and food and drink. Store locked up. Eliminate all ignition sources. Keep container tightly closed when not in use. Do not store in unlabeled containers.

8. EXPOSURE CONTROLS/ PERSONAL PROTECTION

<u>Control Parameters</u>	<u>Occupational Exposure Limits</u>		
<u>Ingredient Identity</u>	<u>ACGIH TLV</u>	<u>OSHA PEL</u>	<u>NIOSH IDLH</u>
Butoxydiglycol	112-34-5	TWA 10ppm	

Distillates, Petroleum TWA:skin absorption 200mg/m³ (as total hydrocarbon vapor) 8 hours
Hydrotreated, Light 64742-47-8

Appropriate Engineering Controls

Engineering Controls: Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants and air concentrations below occupational exposure standards.

Individual protection measures, such as personal protective equipment. (PPE)

Eye/Face Protection: Wear approved tightly sealed safety goggles

Skin & Body Protection: Wear chemical resistant, impervious gloves at all times when handling chemical products. Check during use that gloves are still retaining their impervious properties, as the time for breakthrough can change from different manufacturers and chemical mixtures cannot always be accurately measured. Appropriate footwear and suitable protective clothing should be worn for the degree and risk of exposure.

Respiratory Protection: If workplace exposure limits of product or any component is exceeded, utilize proper respiratory protection program guidelines (see OSHA 1910.134 and American National Standard ANSI Z88.2) Use a properly fitted NIOSH/MSHA air-purifying or air-fed respirator in compliance with the above mentioned standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance: clear liquid
 Odor: near odorless
 Odor threshold: not available
 pH: not applicable
 Melting Point/Freezing Point: -56F
 Initial Boiling Point/Range: 344F-473F
 Flash Pt: >200F lowest ingredient, does not sustain combustion
 Evaporation Rate: <1 (butyl acetate=1)
 Lower explosive limits: .6% Aliphatic Solvent
 Upper explosive limits: 5.5% Aliphatic Solvent
 Vapor Pressure: meets CARB guidelines
 Vapor Density: 4.5-5 (air=1)
 Relative Density: .84
 Solubility in water: Emulsifies
 Partition coefficient: not applicable
 Auto ignition temp: >428F
 Decomposition Temp: not available
 Viscosity: pourable liquid

10. STABILITY AND REACTIVITY

Reactivity: Stable in normal ambient temperature and pressure

Chemical Stability: Stable under recommended storage conditions.

Possibility of Hazardous Reactions: not under normal conditions of storage and use.

Conditions to Avoid: Open flames, sparks

Incompatible Materials: Oxidizing materials

Hazardous Decomposition Products: Carbon monoxide and Carbon Dioxide

11. TOXICOLOGICAL INFORMATION

Acute toxicity: Not classified,

Skin corrosion irritation: not classified,

Serious Eye damage: classified, Category 2, Causes serious eye irritation, Butoxydiglycol 112-34-5

Sensitization: Not classified,

Mutagenicity: Not classified,

Carcinogenicity: Not classified

Reproductive Toxicity: Not Classified

Teratogenicity: Not Available

Specific target Organ Toxicity (single exposure)

Not classified

Specific target Organ Toxicity (repeated exposure):

Not classified

Aspiration Hazard:

Distillate petroleum hydrotreated, light 64742-47-8 , Aspiration Hazard Category 1

Information on the likely routes of exposure:**Ingestion:** May be harmful if swallowed. May be fatal if swallowed and enters airways.**Inhalation:** Do not breathe vapors or mists.**Skin:** May be harmful in contact with skin.**Eye:** Causes serious eye irritation**Symptoms related to the physical, chemical and toxicological characteristics****Ingestion:** See section iv, most important symptoms and effects, acute and delayed.**Inhalation:** See section iv, most important symptoms and effects, acute and delayed.**Skin:** See section iv, most important symptoms and effects, acute and delayed.**Eye:** See section iv, most important symptoms and effects, acute and delayed.**Delayed and immediate effects and also chronic effects from short and long term exposure.**

General: Prolonged or repeated contact can defat the skin and lead to irritation, cracking and/or dermatitis

Carcinogenicity: no known significant effects or critical hazards. Not classifiable.

Numerical measures of Toxicity

Not Available

12. ECOLOGICAL INFORMATION**Toxicity:**

<u>Ingredient name</u>	<u>Result</u>	<u>Species</u>	<u>Exposure</u>
Distillate Petroleum, Hydrotreated, light	Chronic NOEL 0.48 mg/l	Daphnia	21 days

Persistence and degradability:Distillate Petroleum: Biodegradability-inherent
Hydrotreated

Butoxydiglycol 112-34-5: readily biodegradable

Bioaccumulation Potential:

Not expected to bioaccumulate

Mobility in Soil:

No data

Other adverse Effects:

No known significant effects or critical hazards

13. DISPOSAL CONSIDERATIONS

Dispose in accordance with applicable federal, state and local regulations.

14. TRANSPORTATION INFORMATION

DOT: NOT REGULATED
IATA: NOT REGULATED
IMDG: NOT REGULATED

15. REGULATORY INFORMATION

U.S. FEDERAL REGULATIONS: All ingredients are listed or exempted with TSCA.

SARA 302/304: no products were found.

SARA 311/312: acute health hazard

Ingredient	%	FIRE HAZARD	PRESSURE RELEASE	REACTIVE	IMMEDIATE ACUTE	DELAYED CHRONIC
Distillate Petroleum, Hydrotreated	80-95	YES	NO	NO	NO	NO
Butoxydiglycol 112-34-5	PROPRIETARY				YES	YES

SARA 313: butoxydiglycol, <12%

STATE REGULATIONS:

Ingredient	New York	New Jersey	Massachusetts	Pennsylvania
Distillate Petroleum Hydrotreated. 64742-47-8	No	No	No	No
Butoxydiglycol 112-34-5	No	Yes	Yes	yes

California Prop 65: none known

16. OTHER INFORMATION

HMIS RATING: HEALTH (1) FIRE (1) REACTIVITY (0)
 4=EXTREME, 3=HIGH, 2=MODERATE, 1=SLIGHT, 0=INSIGNIFICANT

NOTICE TO READER:

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. The information on this sds was obtained from sources which we believe are reliable. However, the information is provided without any warranty, expressed or implied, regarding its correctness. Users are advised to confirm in advance of need, that information is current, applicable and suited to the circumstances of use. Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the sds. Furthermore, vendor assumes no responsibility for injury caused by abnormal use of this material even if reasonable safety procedures are followed.



YES Environmental, Inc.

1201 24th Street, Suite B110-377, Bakersfield, CA 93301 / (661) 527-0820

Attachment C – Initial Inspection Report



SUMMARY OF LIMITED ASBESTOS INSPECTION FINDINGS

Site Information:

Munsey ES – Flooring in T1, T2, 11A North Restroom &
11A South Restroom

3801 Brave Avenue, Bakersfield, CA 93309



Prepared for:

Mr. Victor Valdez, Preventative Maintenance Supervisor
Bakersfield City School District
1300 Baker Street
Bakersfield, CA 93305
(661) 631-4600

Prepared by:

Kristy Yowell, President
CAC No. 09-4500 / CDPH Inspector/Assessor No. LRC-00004640
YES Environmental, Inc. (YES, Inc.)
Project Number 25YES-99
Report Date: December 17, 2025



Purpose of Inspection

Bakersfield City School contacted YES, Inc. to request a limited interior inspection of the materials anticipated to be disturbed during the following planned work:

- Flooring replacement throughout Classrooms T1 and T2
- Flooring replacement throughout both Staff Restrooms 11A North & 11B South

On Wednesday, November 19, 2025, a site visit was made by YES, Inc. to perform the inspection. The lead portion of this survey is being performed in order for the contractor to comply with Title 8 CCR section 1532.1 in order to protect the workers performing disturbance of these materials.

The inspection was performed by Ms. Yowell who is a certified asbestos consultant and certified lead inspector/risk assessor in California. A copy of her certifications is included with this letter.

Regulatory Review

This asbestos and lead inspection was performed in compliance with the following regulations:

- EPA AHERA regulation 40 CFR Part 76
- EPA NESHAP asbestos regulation 40 CFR Part 61 Subpart M
- Cal/OSHA asbestos regulation Title 8 CCR Section 1529
- Cal/OSHA lead regulation Title 8 CCR 1532.1

The local enforcement office for the EPA NESHAP regulation, also known as San Joaquin Valley Air Pollution Control District (SJVAPCD), requires asbestos inspections of buildings and regulated structures to be performed prior to renovation or demolition activities, regardless of the age of the building or material(s) planned to be disturbed. This survey has met this requirement. Should the building owner opt to proceed with the removal or disturbance of the asbestos-containing materials discussed below (if any), notification to SJVAPCD and a 10-day waiting period may be required. Please contact YES, Inc. consulting firm prior to proceeding with work to determine the applicability of notification requirements.

Cal/OSHA requires an inspection of materials suspect to contain asbestos and lead prior to work commencing in order to protect workers who will be working directly with or around asbestos or lead-containing materials. Should the building owner proceed with any disturbance of the materials (in any amount), a copy of this report should be provided to all contractors involved. Note: there are other notifications that may be required in order to comply with this regulation. Please contact YES, Inc. consulting firm before proceeding with work to determine the applicability of such notifications.





Asbestos Inspection Protocol

Suspect materials anticipated to be disturbed were inspected and categorized into homogeneous areas and sampled accordingly. Samples were collected by misting the material being sampled with water, then drilling, scraping, hammering or chiseling from the substrate. Whenever possible, samples were collected from areas previously damaged or deteriorating. Each sample was placed in its own plastic sample bag, sealed, and labeled with a unique identification number. Sampling tools were individually cleaned before and after each sample was collected to avoid sample cross contamination.

The samples collected were recorded on YES's chain-of-custody form which accompanied them to the laboratory for analysis. The samples were shipped via FedEx to SGS Forensic Laboratories, an NVLAP accredited laboratory in Hayward, CA. The samples were analyzed using EPA Method 40CFR, Part 763, Appendix E to Subpart E, and EPA 600/R-93-116.

Asbestos - Summary of Laboratory Findings

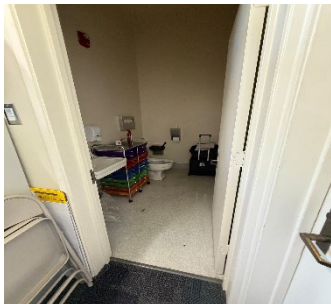Material Description	Location(s) See attached map for room locations	% Asbestos	Approximate Quantity	NESHAP Category
<p>Concealed 9" floor tile & black mastic</p> <p>Sample #: 01A-01B</p>	<p>11A South & 11B North Staff Restrooms</p> <ul style="list-style-type: none"> - Flooring throughout both rooms (under the linoleum) 	<p>Tile=2-3% CH Mastic=3% CH</p>	+/- 96 ft ²	RACM
<p>Grey mosaic linoleum & yellow glue</p> <p>Sample #: 02A-02B</p>	<p>11A South & 11B North Staff Restrooms</p> <ul style="list-style-type: none"> - Surface layer flooring & wall base throughout <p>NOTE: ACM floor tile beneath</p>	No asbestos detected	+/- 96 ft ²	N/A
<p>Concealed 9" green floor tile, black mastic & black felt</p> <p>Sample #: 04A-04B</p>	<p>Classroom T1</p> <ul style="list-style-type: none"> - Flooring throughout all the rooms (under carpet & 12" floor tile) 	<p>Tile=3% CH Mastic=3% CH Felt=10% CH</p>	+/- 860 ft ²	RACM



Material Description	Location(s) See attached map for room locations	% Asbestos	Approximate Quantity	NESHAP Category
Brown carpet & yellow glue Sample #: 03A	Classroom T1 - Surface layer flooring in 85% of the room	No asbestos detected	+/- 800 ft ²	N/A
4" Blue baseboards & glue Sample #: 05A	Classroom T1 & T2 - Baseboards throughout	No asbestos detected	+/- 232 lf	N/A
12" Cream oatmeal floor tile & glue Sample #: 06A	Classroom T2 - 20% of the flooring in the room	No asbestos detected	+/- 106 ft ²	N/A
Grey multi-colored carpet & yellow glue Sample #: 07A	Classroom T2 - 80% of the flooring in the room	No asbestos detected	+/- 800 ft ²	N/A

It is important to know the EPA NESHAP definitions of materials as they explain how conditions are subject to change during disturbance. See below for those definitions.

NESHAP Definitions

Category I non-friable asbestos-containing material (ACM) means asbestos-containing packings, gaskets, resilient floor covering, and asphalt roofing products containing more than 1 percent asbestos.

Category II non-friable ACM means any material, excluding Category I non-friable ACM, containing more than 1 percent asbestos.

Regulated asbestos-containing material (RACM) means

- (a) Friable asbestos material;
- (b) Category I nonfriable ACM that has become friable;
- (c) Category I nonfriable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading; or
- (d) Category II nonfriable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of demolition or renovation operations regulated by this subpart.



Lead Inspection Protocol

No lead was included as part of this requested inspection. However, it is prudent to know that the walls in both the 11A South and 11B North Staff Restrooms are lined with lead-based ceramic wall tile. Care should be taken to ensure the wall tile is not disturbed during the asbestos abatement work.

Additional Lead Information

Contractors, whose employees work at this site, are required to assess if their work will be subject to the requirements of the Cal/OSHA lead construction standard (CCR Title 8 § 1532.1). Cal/OSHA standards are designed to regulate and enforce on-the-job worker safety. Employers are required by law to ensure that employees are not exposed to airborne lead levels which exceed the permissible exposure limit (PEL). The standard requires worker exposure monitoring, medical surveillance, training, special work practices, etc.

Each contractor/employer who bids and/or performs work at the site will need to assess potential lead exposure to employees performing their particular scope of work. Contractors who perform work at this site may need to obtain additional data (beyond the data presented in this report) during their assessment and Cal/OSHA compliance planning. Individual contractors/subcontractors should be allowed access to the project to obtain any needed data (samples, consultation, etc.) to complete their employee exposure assessment.

Any work performed at the site where LBP or LCP is likely to be disturbed should be performed by a contractor trained and qualified to perform lead-related construction work. Any work that exceeds Cal/OSHA's permissible exposure limit or is performed to remediate a lead hazard must be conducted by CDPH certified personnel.

DISCLAIMERS

The nature of renovation/demolition is such that materials can be uncovered which previously were unknown to exist. Therefore, YES, Inc. cannot be responsible for "hidden materials", although reasonable efforts were made during the inspection to detect all suspect materials anticipated to be disturbed. If any materials other than those included in this report and/or its attachments are discovered during renovation, it must be assumed that the materials are asbestos and/or lead-containing, and the project should then be halted and re-evaluated.

This inspection and testing performed by YES, Inc. reflect the environment and structure only at the time and location the investigation was undertaken.

This report has been prepared for the exclusive use of YES, Inc.'s client and is not intended for use by any other party. Any use of this report by a third party shall be at their own risk and shall constitute release and an agreement to defend and indemnify YES, Inc. from any and all liability in connection therewith. YES, Inc. accepts no liabilities or responsibilities, either expressed or implied, with regard to this structure and symptoms or health conditions of occupants.

This report does not assess or anticipate future events that may impact or damage asbestos or lead materials. Future changes in the condition of ACM or LBP may require a new assessment by a certified asbestos consultant and certified lead inspector/risk assessor.

This report is not a work plan or project specification.



FURTHER RECOMMENDATIONS

YES, Inc. recommends that the building owner disseminate this report to all prospective contractors bidding work at the subject site to assist them in identifying the materials tested for asbestos content.

Project design and oversight by a consultant is recommended to ensure the project is performed safely and legally during the removal and disturbance of asbestos-containing materials.

Thank you for using YES, Inc. for your consulting needs. We look forward to working together in the future.

Sincerely,

A handwritten signature in cursive script that reads "Kristy Yowell".

Kristy Yowell, President

- Attachments
- A – Campus Map
 - B – Chain of Custody & Laboratory Results
 - C – YES, Inc. Certifications & Laboratory Certifications



Attachment A – Campus Map



Attachment B – Chain of Custody & Laboratory Results



YES Environmental, Inc.

1201 24TH Street, Suite B110-377, Bakersfield, CA 93301 / (661) 527-0820

Contact Name & Phone Number		Kristy Yowell (661) 477-4662		Account #	L1847
Comments	Please e-mail results to: kristy@yowellenvironmental.com & logan@yowellenvironmental.com		TYPE OF ANALYSIS AND TURN AROUND TIME		
Collected By	Kristy Yowell		PLM - Asbestos		
Date Samples Collected	11/19/2025		72 Hour		
Job # & Site Name	25YES-99 Munsey ES – T1, T2 & 11A Restrooms				
Client	Bakersfield City School District		LAB	SGS Built	
Submitted By	Kristy Yowell	<i>KY</i>	Date	11/20/2025	
Received By	<i>JT</i>		Date	11/20/25 930 FX	
SAMPLE ID		1 ST LINE: MATERIAL DESCRIPTION – 2 ND LINE: SAMPLE LOCATION			
25YES-99-01A		CONCEALED BROWN FLOOR TILE & BLACK MASTIC			
		11A SOUTH RR – AT SINK			
25YES-99-01B		CONCEALED BROWN FLOOR TILE & BLACK MASTIC			
		11A NORTH RR – AT ENTRY AT EXISTING DAMAGE			
25YES-99-02A		GREY MOSAIC LINOLEUM & YELLOW GLUE			
		11A NORTH RR – AT ENTRY AT EXISTING DAMAGE			
25YES-99-02B		GREY MOSAIC LINOLEUM & YELLOW GLUE			
		11B SOUTH RR – AT SINK			
25YES-99-03A		BROWN CARPET & GLUE			
		T1 – CENTER OF WEST ROOM			
25YES-99-04A		CONCEALED GREEN FLOOR TILE, BLACK MASTIC & BLACK FELT			
		T1'S SE ROOM – CENTER OF ROOM			
25YES-99-04B		CONCEALED GREEN FLOOR TILE, BLACK MASTIC & BLACK FELT			
		T1 WEST ROOM – NE AREA OF ROOM			
25YES-99-05A		4" DK BLUE BASEBOARD & CREAM & DARK GLUES			
		T2 – AT SW ENTRY			
25YES-99-06A		12" CREAM OATMEAL FLOOR TILE & GLUE			
		T2 – WEST SIDE AT SINK			
25YES-99-07A		GREY MULTI COLORED CARPET & YELLOW GLUE			
		T2 – NORTH SIDE EAST END			

Bulk Asbestos Analysis

(EPA Method 40CFR, Part 763, Appendix E to Subpart E and EPA 600/R-93-116, Visual Area Estimation)
 NVLAP Lab Code: 101459-0

YES Environmental
 Kristy Yowell
 1201 24th Street
 Suite B110-377
 Bakersfield, CA 93301

Client ID: L1847
Report Number: B378505
Date Received: 11/21/25
Date Analyzed: 11/25/25
Date Printed: 11/26/25
First Reported: 11/26/25

Job ID/Site: 25YES-99; Munsey ES -- T1, T2 & 11A Restrooms

SGSFL Job ID: L1847
Total Samples Submitted: 10
Total Samples Analyzed: 10

Date(s) Collected: 11/19/2025

Sample ID	Lab Number	Asbestos Type	Percent in Layer	Asbestos Type	Percent in Layer	Asbestos Type	Percent in Layer
25YES-99-01A	12837662						
Layer: Brown Tile		Chrysotile	3 %				
Layer: Black Mastic			ND				
Total Percentage Values of Non-Asbestos Fibrous Components:							
Cellulose (Trace)							
25YES-99-01B	12837663						
Layer: Brown Tile		Chrysotile	2 %				
Layer: Black Mastic			ND				
Layer: Grey Cementitious Material			ND				
Total Percentage Values of Non-Asbestos Fibrous Components:							
Cellulose (Trace)							
25YES-99-02A	12837664						
Layer: Green Sheet Flooring			ND				
Layer: Fibrous Backing			ND				
Layer: Yellow Mastic			ND				
Total Percentage Values of Non-Asbestos Fibrous Components:							
Cellulose (20 %) Fibrous Glass (5 %) Synthetic (10 %)							
25YES-99-02B	12837665						
Layer: Green Sheet Flooring			ND				
Layer: Fibrous Backing			ND				
Layer: Yellow Mastic			ND				
Total Percentage Values of Non-Asbestos Fibrous Components:							
Cellulose (20 %) Fibrous Glass (5 %) Synthetic (10 %)							
25YES-99-03A	12837666						
Layer: Multicolored Carpet			ND				
Layer: Grey Non-Fibrous Material			ND				
Layer: Clear Mastic			ND				
Total Percentage Values of Non-Asbestos Fibrous Components:							
Cellulose (Trace) Synthetic (85 %)							

Client Name: YES Environmental

Report Number: B378505

Date Printed: 11/26/25

Sample ID	Lab Number	Asbestos Type	Percent in Layer	Asbestos Type	Percent in Layer	Asbestos Type	Percent in Layer
25YES-99-04A	12837667						
Layer: Green Tile		Chrysotile	3 %				
Layer: Black Mastic		Chrysotile	3 %				
Layer: Black Felt		Chrysotile	10 %				
Total Percentage Values of Non-Asbestos Fibrous Components:							
Cellulose (15 %)							
25YES-99-04B	12837668						
Layer: Green Tile			ND				
Layer: Green Tile		Chrysotile	3 %				
Layer: Black Mastic		Chrysotile	3 %				
Layer: Black Felt		Chrysotile	10 %				
Total Percentage Values of Non-Asbestos Fibrous Components:							
Cellulose (15 %)							
25YES-99-05A	12837669						
Layer: Blue Non-Fibrous Material			ND				
Layer: Beige Mastic			ND				
Layer: Wood			ND				
Total Percentage Values of Non-Asbestos Fibrous Components:							
Cellulose (10 %)							
25YES-99-06A	12837670						
Layer: Off-White Tile			ND				
Layer: Yellow Mastic			ND				
Layer: Wood			ND				
Total Percentage Values of Non-Asbestos Fibrous Components:							
Cellulose (10 %)							
25YES-99-07A	12837671						
Layer: Multicolored Carpet			ND				
Layer: Grey Non-Fibrous Material			ND				
Layer: Yellow Mastic			ND				
Layer: Wood			ND				
Layer: Black Felt			ND				
Total Percentage Values of Non-Asbestos Fibrous Components:							
Cellulose (15 %) Synthetic (85 %)							
Comment: Bulk complex sample.							



Maria Casper, Laboratory Supervisor, Hayward Laboratory

Note: Limit of Quantification ('LOQ') = 1%. 'Trace' denotes the presence of asbestos below the LOQ. 'ND' = 'None Detected'.

Inhomogeneous samples are separated into homogenous subsamples and analyzed individually. Analytical results and reports are generated by SGS at the request of and for the exclusive use of the person or entity (client) named on such report. Results, reports or copies of same will not be released by SGS to any third party without prior written request from client. This report applies only to the sample(s) tested. Supporting laboratory documentation is available upon request. This report must not be reproduced except in full, unless approved by SGS. The client is solely responsible for the use and interpretation of test results and reports requested from SGS. This report must not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. Government. SGS is not able to assess the degree of hazard resulting from materials analyzed. SGS reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified. All samples were received in acceptable condition unless otherwise noted.



Attachment C –YES, Inc. Certifications and laboratory Certifications

DEPARTMENT OF INDUSTRIAL RELATIONS

Division of Occupational Safety and Health-Asbestos & Carcinogen Unit

1750 Howe Avenue, Suite 460

Sacramento, CA 95825

(916) 574-2993 Office <http://www.dir.ca.gov/dosh/asbestos.html> actu@dir.ca.gov



903034500C

324

326

January 17, 2025

Kristy L Yowell
13708 Carpaccio Lane
Bakersfield CA 93306

Dear Certified Asbestos Consultant or Technician:

Enclosed is your certification card. **To maintain your certification, you must abide by the rules printed on the back of the certification card.**

Your certification is valid for a period of one year. If you wish to renew your certification, you must apply for renewal at least 60 days before the expiration date shown on your card. [8 CCR 341.15(h)(1)].

Please hold and do not send copies of your required AHERA refresher renewal certificates to our office until you apply for renewal of your certification.

Certificates must be kept current if you are actively working as a CAC or CSST. The grace period is only for those who are not actively working as an asbestos consultant or site surveillance technician.

Please contact our office at the above address or email w any changes in your contact/ mailing information within 15 days of the change.

Sincerely,

Dean Mochrie, CAC
Senior Safety Engineer

Attachment: Certification Card

cc: File

State of California
Division of Occupational Safety and Health
Certified Asbestos Consultant
Kristy L Yowell



Name
Kristy L Yowell

Certification No. 09-4500

Expires on 05/21/2026

This certification was issued by the Division of Occupational Safety and Health as authorized by Sections 7180 et seq of the Business and Professions Code.



STATE OF CALIFORNIA
DEPARTMENT OF PUBLIC HEALTH



LEAD-RELATED CONSTRUCTION CERTIFICATE

INDIVIDUAL:



Kristy Yowell

CERTIFICATE TYPE:

Lead Inspector/Assessor

Lead Supervisor

NUMBER:

LRC-00004640

LRC-00004639


EXPIRATION DATE:

2/9/2027

2/9/2027

Disclaimer: This document alone should not be relied upon to confirm certification status. Compare the individual's photo and name to another valid form of government issued photo identification. Verify the individual's certification status by searching for Lead-Related Construction Professionals at www.cdph.ca.gov/programs/clppb or calling (800) 597-LEAD

United States Department of Commerce
National Institute of Standards and Technology

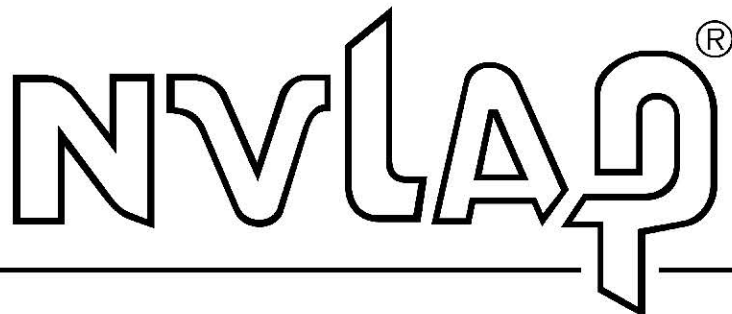

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 101459-0

SGS Forensic Laboratories

Hayward, CA

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Asbestos Fiber Analysis

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique on ISO/IEC 17025).*

2025-07-01 through 2026-06-30

Effective Dates



A handwritten signature in blue ink, appearing to read 'R. K. Kueh', written over a horizontal line.

For the National Voluntary Laboratory Accreditation Program