

3 RESTROOM FLOOR PLAN
A1 1/4"=1'-0" OPTION #3

- NOTES:
- CLOSER END CAPS ON FRONT AND REAR OF ROOF DECK. NO EXPOSED RISERS.
 - SOLID PLYWOOD DECK WITH FELT UNDERLAYMENT AT ALL STANDING SEAM METAL ROOFS.
 - CLOSED EAVES. NO EXPOSED ROOF-FRAMING.

- SHEET NOTES -
- 3'-0" x 1'-0" WINDOW
 - ROOM I.D. SIGNAGE PER DETAIL 2 & 7/AD (BY OWNER)
 - RESTROOM I.D. SIGNAGE PER DETAIL 1 & 6/AD (BY OWNER)
 - FIRE EXTINGUISHER TOP OF BRACKET @ +48" A.F.F.
 - EXIT TACTILE SIGN PER DETAIL 10/AD (BY OWNER)
 - HVAC UNIT (LOCATION MAY VARY)
 - ELECTRICAL PANEL (LOCATION MAY VARY)
 - DOWNSPOUT (QUANTITY & LOCATION MAY VARY)
 - FLOOR DRAIN (LOCATION MAY VARY) TYP.
 - FLOOR LIVE LOAD SIGN PER 1603A.3 2007 CBC
 - OPTIONAL TYPICAL RAMP REFER TO SHEET S6R FOR DETAILS
 - CLASSROOM ID & ISA PER DETAIL 5 & 9/AD

- GENERAL NOTES -
- REFER TO SHEETS A2 & A2.1 FOR ADDITIONAL FLOOR PLAN CONFIGURATIONS
 - INTERIOR WALLS MAY OCCUR THROUGHOUT BUILDING REFER TO SHEET S5A FOR ATTACHMENTS.
 - PANIC HARDWARE IS REQUIRED TO BE INSTALLED WHEN THE CONFIGURATION OF ANY ROOM PROVIDES AN OCCUPANT LOAD OF 50 OR GREATER CBC 1008.1.9
 - IF OCCUPANCY LOAD EXCEEDS 50 PROVIDE A SECOND EXIT DOOR PER CBC TABLE 1015.1
 - PROVIDE OCCUPANT LOAD SIGN (BY OWNER) CAPACITY POSTING PER CBC SECTION 1004.3 TITLE 19 C.C.R. SECTION 3.3.0. THIS ROOM SHALL BE POST WITH A DURABLE SIGN NEAR THE MAIN EXIT FROM THE ROOM.

SYMBOL SCHEDULE

#	DOOR (REFER TO SHEET A3 FOR TYPES)
X	DOOR HARDWARE TYPE REFER TO DOOR HARDWARE SCHEDULE
A	WINDOW (REFER TO SHEET A3 FOR TYPES)

DOOR HARDWARE SCHEDULE

A	EXTERIOR DOOR LOCKSET W/ LEVER HARDWARE PROVIDED BY DISTRICT
B	EXTERIOR DOOR PANIC BAR W/ PULL ON EXTERIOR VON DUPRIN 22Lx230NL (WHEN REQUIRED)

Exterior Door
 A) Hinges: Hager 4-1/2x4-1/2 butts, BB1279 US260, 1-1/2 pair each door with set screw in barrel and ball bearing design
 C) Closer: Norton 7500DA or 8500DF series, LCN 1460 Del series or equal. (5 lbs. max. pressure) (15 lbs. max at fire doors.)
 D) Weatherstripping: All exterior doors shall be weatherstripped with Pemko 299D, Ultra WS007, at door jams and head or equal.
 E) Threshold: Threshold shall be Pemko 271 AV 5" X 1/4" THICK aluminum with Pemko 216 AV Ultra TH042 door bottom.

BASED ON PC# 02-109808

REVISIONS

NO	DATE	DESCRIPTION


DATE: 01/12/10
 SCALE: NOTED
 DRAWN BY: RS
 SERIAL NO.:

CUSTOMER:
 BAKERSFIELD SCHOOL DISTRICT
 MUNSEY ELEMENTARY SCHOOL

12' x 40' RELOCATABLE BUILDING
 TYPICAL FLOOR PLANS



APPROVALS:

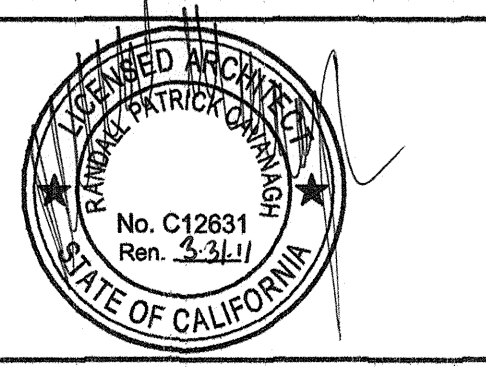

IDENTIFICATION STAMP
 DIV. OF THE STATE ARCHITECT
 OFFICE OF REGULATION SERVICES
 No. C12831
 Ren. 3/24/11
 AC. FLS. SS. [Signature]
 DATE: 2/10/10

PROJECT No.
 A1

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF AMERICAN MODULAR SYSTEMS, INC. AND ARE NOT TO BE REPRODUCED, CHANGED OR COPIED IN ANY FORM OR MANNER, NOR ARE THEY TO BE ASSIGNED TO ANY THIRD PARTY WITHOUT THE WRITTEN AUTHORIZATION OF AMERICAN MODULAR SYSTEMS, INC.