


SECTION 2-2

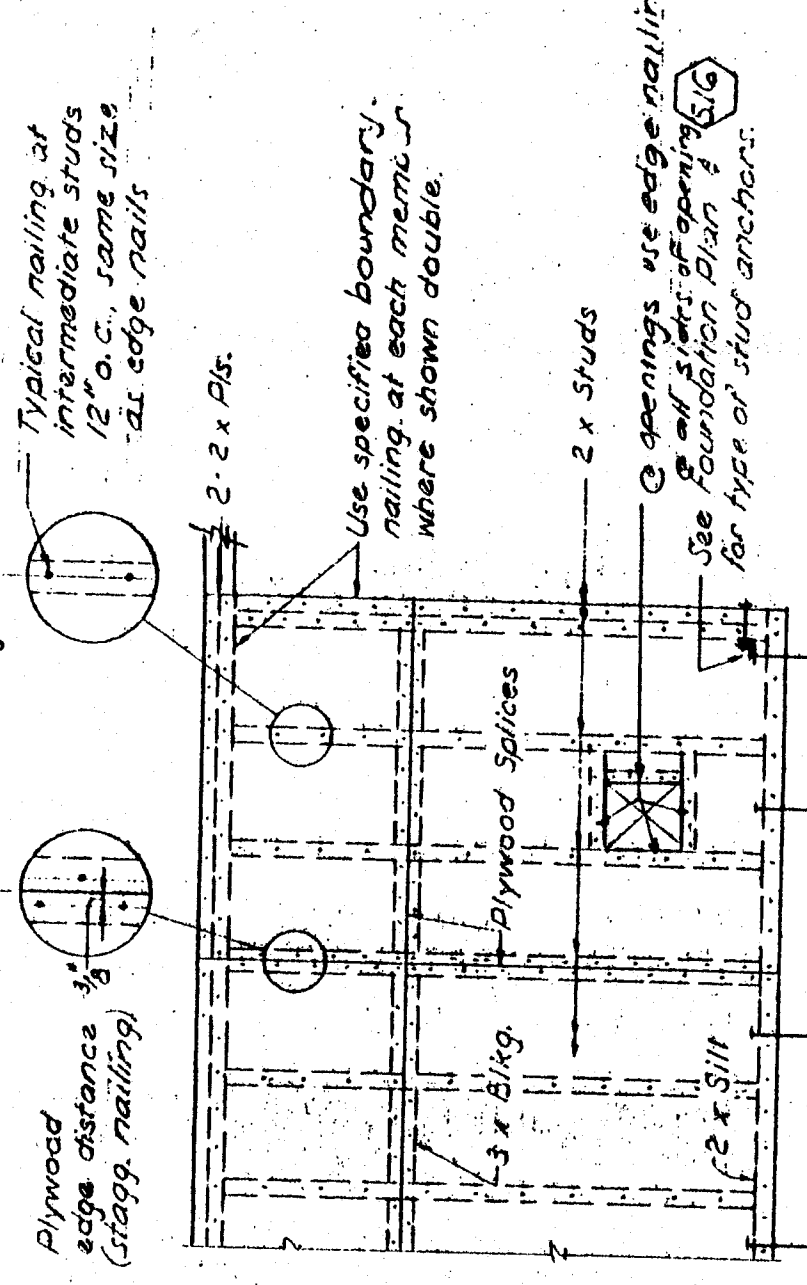

Sill bolts as per schedule unless otherwise noted on stud elev's or sect's

PLYWOOD PANEL SCHEDULE					
Type	Thickness	Nailing @ edges of panel	Nailing @ shear panel boundary	Sill Bolts	Remarks
A	3/4"	3" x 3"	3" x 3"	5" x 12" x 20"	
B	3/4"	3" x 3"	3" x 3"	5" x 12" x 14"	
C	3/4"	3" x 3"	3" x 3"	5" x 12" x 10"	
D					
E					
F					

- Notes:
- All nails shall be common wire nails.
 - Individual pieces of plywood shall be not less than 1'-4" in least dimension nor less than 5'-9" in total area.
 - Panel boundaries shall be marked by D.F.P.A.
 - Prepare notes when required to detail.
 - Not less than 2 sill bolts per shear panel required, in addition to stud anchor bolts.

TYPICAL PLYWOOD SHEAR PANEL

WILSON AND WILSON
 STRUCTURAL ENGINEERS
 1005 MARKET STREET
 SAN FRANCISCO, CALIF.