



**ORDIZ MELBY**  
ARCHITECTS, INC.  
6000 KING AVENUE SUITE 200  
BAKERSFIELD, CALIFORNIA 93309  
TELEPHONE (805) 832-2298  
FACSIMILE (805) 832-4291

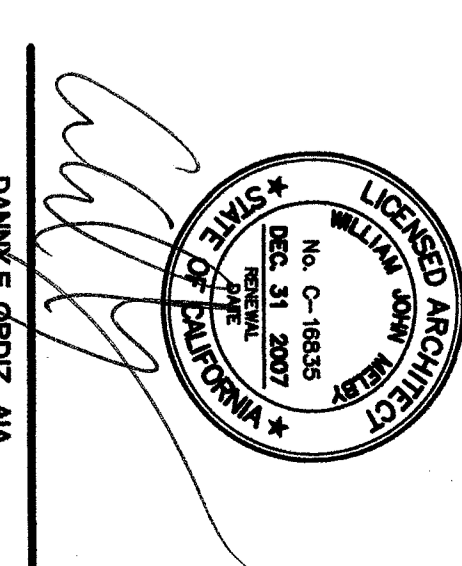

DAN E. GRODZ, AIA  
ARCHITECT C-10835  
WILLIAM J. MERRY, AIA  
ARCHITECT C-10835  
CONSULTANT

IDENTIFICATION STAMP  
DIVISION OF STATISTICAL SERVICES  
OFFICE OF RESOLUTION SERVICES  
APPL 03-107003  
FILE # 15-6  
AC \_\_\_\_\_ FS \_\_\_\_\_ SS \_\_\_\_\_  
DATE \_\_\_\_\_

MODERNIZATION AT  
CURRAN MIDDLE  
SCHOOL  
FOR:  
**BAKERSFIELD  
CITY SCHOOL  
DISTRICT**  
1116 LYNNRICK WAY  
BAKERSFIELD  
CALIFORNIA  
93309

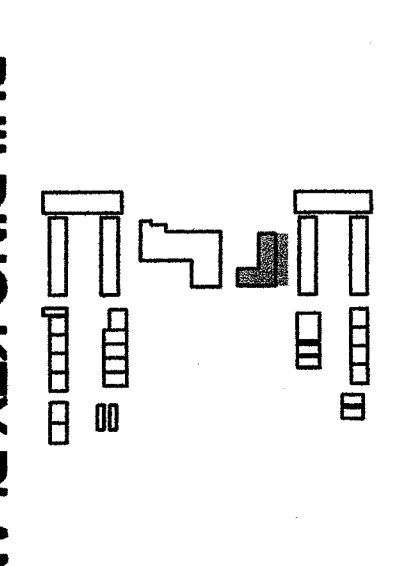

**BUILDING KEY PLAN**

MARK	DATE	DESCRIPTION
SO		
CD	09/23/07	ADDENDUM 1
AD	09/11/07	ADDENDUM 2
AD	11/01/07	ADDENDUM 3

**INTERIOR  
ELEVATIONS  
BUILDING D**  
SHEET IDENTIFICATION NUMBER  
**A-235**  
SHEET 24 OF 46

**KEYNOTES**  
THIS SHEET ONLY

- 01 REMOVE (E) RUBBER BASE WHERE OCCURS-PROVIDE/INSTALL RTSS.
- 02 REMOVE/REPLACE (E) COUNTERTOP W/CORIAN COUNTERTOP W/6" SPLASH, (UNO) CAULK AT WALL.
- 03 REPLACE EXISTING SINK CABINET WITH ADA COMPLIANT SINK CABINET TYPICAL. ALL SINK CABINETS.
- 04 (E) CABINET TO REMAIN. REMOVE DOOR AND DRAWER PULLS, SAND HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE.
- 05 MAINTAIN (E) OPEN SPACE FOR METAL FILE CABINET.
- 06 REMOVE/INSTALL PAPER TOWEL DISPENSER-SEE SPECIFICATIONS.
- 07 (E) PLUMBING WALLS AS REQUIRED. PREP - PAINT
- 08 PATCH/FILL DAMAGED WALLS AS REQUIRED. PREP - PAINT
- 09 REMOVE/REPLACE CHALK BOARDS W/LIQUID MARKER BOARDS SEE SPECIFICATIONS.
- 10 REMOVE/REPLACE (E) TAGBOARDS-SEE SPECIFICATIONS SEE DETAIL 46/A-231 FOR MOUNTING REQUIREMENTS
- 11 REMOVE ABANDON HEATER UNIT CAP ALL SUPPLY/RETURN LINES BEHIND WALL. REMOVE VENT OPENING. EXTERIOR WALL UNTIL MATCH 2X FRAMING. INSTALL INSULATION, PATCH-MATCH FINISHES-PAIN.
- 12 (E) DOOR/FRAME TO REMAIN. REPLACE HARDWARE W/ ACCESSIBLE HARDWARE. (E) DOOR/FRAME TO REMAIN. REPLACE HARDWARE W/ ACCESSIBLE HARDWARE. (E) DOOR/FRAME TO REMAIN. REPLACE HARDWARE W/ ACCESSIBLE HARDWARE.
- 13 (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE.
- 14 (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE.
- 15 (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE.
- 16 (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE.
- 17 (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE. (E) DOOR/FRAME TO REMAIN. REMOVE DOOR/FRAME HARDWARE.
- 18 REMOVE (E) TROUGH SINK. PROVIDE/INSTALL PLASTIC LAMINATE COUNTER W/6" SPLASH & H.C. ACCESSIBLE SINK-CONNECT TO AS REQUIRED FOR INSTALLATION OF BLOODING FOR COUNTERTOP-PATCH TILE-MATCH FINISHES.
- 19 REMOVE (E) WOOD SHELF/COAT ROD/HOOKS. PROVIDE/INSTALL PLASTIC LAMINATE SHELF/COAT ROD/HOOKS-MATCH HEIGHT & DEPTH OF REMOVED SHELF.
- 20 REMOVE (E) WOOD SHELF/COAT ROD/HOOKS. PATCH WALL AS REQUIRED. PAINT PLUMBING WALL.
- 21 PREP (E) WOOD COUNTERTOP & ANGLED SHELVES-PAIN.
- 22 REMOVE (E) COUNTERTOP & H.C. SINK CABINET TO PROVIDE 27" CLEAR KNEE SPACE.
- 23 (E) STOREROOM DOORS-SEE DOOR SCHEDULE.
- 24 (E) STOREROOM WINDOWS TO REMAIN.
- 25 (E) DISPLAY CASE TO REMAIN-REPLACE CORN LINING, PRIME/PAINT WOOD SURFACE.
- 26 (E) ELECTRICAL PANELS TO REMAIN
- 27 SEE PLUMBING PLANS FOR FIXTURE REQUIREMENTS
- 28 REMOVE (E) DRINKING FOUNTAIN-PROVIDE/INSTALL H.C. ACCESSIBLE FINISHES. FOUNTAIN-SEE PLUMBING. PATCH WALL, MATCH FINISHES.
- 29 (E) TAGBOARD TO REMAIN (N.I.C.)
- 30 REMOVE (E) TAGBOARD
- 31 REMOVE PORTION OF WALL TO PROVIDE OPENING. PATCH WALL/CORNER FINISHES. PATCH WALL/CORNER FINISHES. PATCH WALL/CORNER FINISHES.
- 32 REMOVE / INSTALL H.H. DOOR / FRAME / ACCESSIBLE HARDWARE PATCH WALL MATCH FINISHES SEE DOOR AND FINISH SCHEDULE
- 33 5/8" GYP. BOARD WITH 1/2" VERBER PLASTER MATCH ALL FINISHES. PATCH WALL MATCH FINISHES SEE DOOR AND FINISH SCHEDULE.
- 34 PROVIDE/INSTALL CABINETS PER SPECIFICATIONS SEE DETAIL 46/A-231 FOR BLOODING REQUIREMENTS.
- 35 REMOVE DOOR/FRAME. INFILL OPENING W/STUCCO INSULATION. PATCH WALL MATCH FINISHES.
- 36 REMOVE DOOR/FRAME. INFILL OPENING W/STUCCO INSULATION. PATCH WALL MATCH FINISHES.
- 37 REMOVE/INSTALL RTSS WHERE OCCURS
- 38 REMOVE PORTION OF (E) CABINET BACKSPLASH, DRAWER & DOOR PROVIDE END PANEL-WOOD/PLY AS REQUIRED. REMAINING DRAWER MATCH WOOD & CABINETS-PAIN. PATCH WALL AS REQUIRED. NO BASE REMOVE/REPLACE FLOORING TO WALL. WASTE SUPPLY/WASTE LINES SEE PLUMBING PLANS.
- 39 PROVIDE/INSTALL CABINETS PER SPECIFICATIONS INSTALL BLOODING, PATCH WALL MATCH FINISHES SEE DOOR AND FINISH SCHEDULE.
- 40 PATCH WALL AS REQUIRED. PATCH WALL MATCH FINISHES SEE DOOR AND FINISH SCHEDULE.

