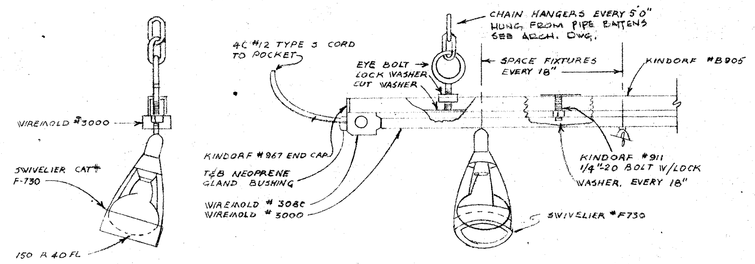

DETAIL SPECIAL BORDER

SCALE — 1½" = 1'-0"

NOTES:

1. PANEL "A5" IS RECESS MOUNTED ON THE WALL AS INDICATED ON PLANS.
2. THE PANEL IS OF THE SCREW COVER TYPE OF CODE GAGE STEEL AND IS TO BE FINISHED IN HAMERTONE GRAY.
3. THE SPOTLIGHTS, BORDER LITES, FLOOR POCKETS AND THE P.A. PLUG SWITCHES ARE BRIANT # 4901, THE HOUSE LIGHT SWITCHES ARE H&H # 4384. THE FOOT LIGHT SWITCHES ARE BRIANT # 4902.
4. ALL SWITCHES SHALL BE IDENTIFIED WITH BAKELITE NAMEPLATES, ¼" LETTERS.
5. BOTTOM ROW OF SWITCHES TO BE BLANKED OUT. PROVISIONS FOR FUTURE SWITCHES, WITH THE EXCEPTION OF PLUG CIRCUIT.

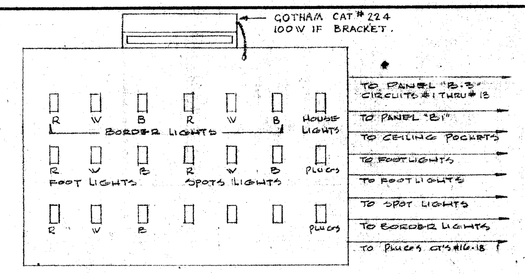

DETAIL PANEL "B5"

NO SCALE

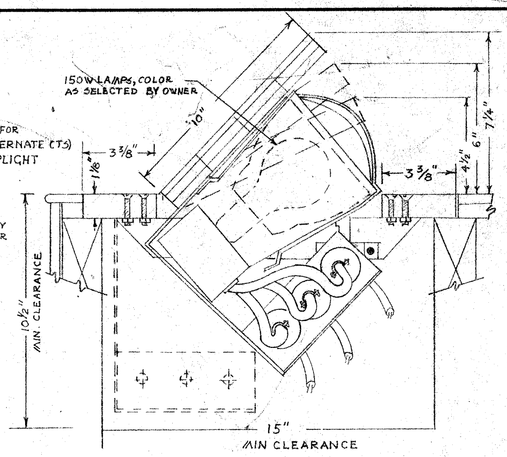

NOTE:
ELECTRICAL CONTRACTOR SHALL FURNISH & INSTALL ALL NECESSARY TWISTLOCK RECEPTACLES ETC. FOR THESE UNITS AS REQUIRED.

DETAIL - DISAPPEARING FOOTLIGHTS - REMOVABLE

NO SCALE



T.C. # 1, 3, 4, & 5 DETAIL

SCALE — 1½" = 1'-0"



T.C. # 2 DETAIL

SCALE — 1½" = 1'-0"

NOTE:

1. ALL SIGNAL CABINETS SHALL BE 4½" IN DEPTH. FINISH SHALL BE HAMMERTONE GRAY.
2. CABINETS SHALL BE FURNISHED WITH PIANO TYPE HINGE ON DOORS, YALE # LL603 LOCKS (ALL LOCKS KEYED ALIKE), BAKRIBES, AND JONES TERMINAL STRIPS AS REQUIRED.
3. ALL TERMINAL CABINETS SHALL BE FLUSH MOUNTED, AND HAVE 3/4" TRIM ON ALL SIDES.

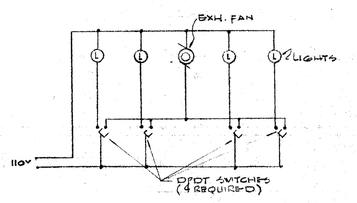

EXHAUST FAN WIRING DIAGRAM

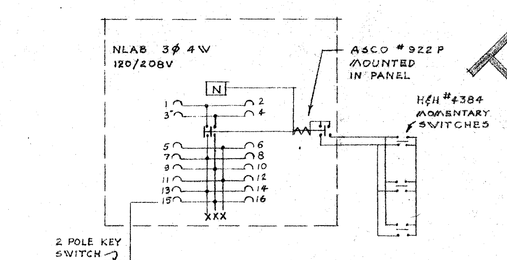

LINE DIAGRAM PANEL "B-1"

TYPICAL EXTERIOR 2 GANG SW PLATE IDENTIFICATION

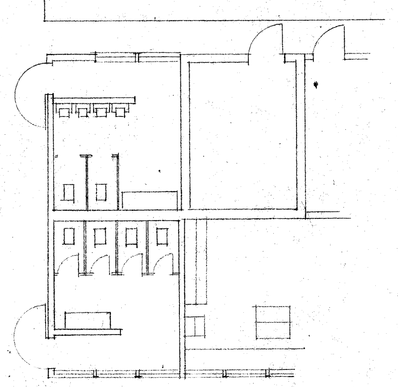

KEY PLAN

PANEL B-3						TYPE- ULAB-P FLUSH MOUNTED 3φ 4W., 120/208V
CT. NO.	BREAKER SIZE	BREAKER POLE	LOAD IN WATTS φA	φB	φC	DESCRIPTION
1	20	1	900			LIGHTS
2			900			
3				900		
4				900		
5					900	
6					900	
7			900			
8			900			
9				900		
10				900		
11					900	
12					900	
13			900			
14			1150			
15				1200		PLUGS
16				880		LIGHTS
17					1020	PLUGS
18					500	
19			500			SPARE
20			1000			PLUGS
21				500		SPARE
22-24				500		
25	1	3	700	700	700	@ 3φ, 100' UV B-1
26	50	3	5850	5100	5950	SUB TO "B"
	TOTALS		13,000	11,600	10,050	FEEDER: 4#2/0

PROVIDE ONE (1) 30A DPDT 150V TIME SWITCH-TORK # 1902 TO CONTROL CIRCUIT # 19

PROVIDE ONE (1) 30A DPDT 150V TIME SWITCH-TORK # 1902 TO CONTROL CIRCUIT # 19

OFFICE OF SUPERINTENDENT OF SCHOOLS
APPROVED
DATE

STATE OF CALIFORNIA
DEPARTMENT OF PUBLIC WORKS
DIVISION OF ARCHITECTURE

STATE OF CALIFORNIA — DEPARTMENT OF PUBLIC WORKS
DIVISION OF ARCHITECTURE
17225 APPROVED JUN 6 - 1958
APPROVED
by E. Mayer

APPROVED BY BOARD OF EDUCATION
BAKERSFIELD CITY SCHOOL DIST.
DATE APR 14 1958
Edward L. Compton
SUPERINTENDENT OF SCHOOLS
EXECUTIVE OFFICER

CHECK AND VERIFY ALL DIMENSIONS AND CONDITIONS AT JOB SITE BEFORE PROCEEDING WITH THE WORK. REPORT ANY DISCREPANCIES TO THE ARCHITECT.

MARK	DATE	REVISIONS
A		
B		
C		
D		
E		

EDWARD E. OWE
ELECTRICAL ENGINEER
3833 FULTON DR. REG. NO. 1754
BAKERSFIELD CALIFORNIA

DATE
DRAWN
CHECKED

C-835
JOB No.

ERNEST L. McCOY A.I.A. ARCHITECT
2011 H STREET
BAKERSFIELD
PH. NE FA. 4-9851
CALIFORNIA

PICO STREET SCHOOL
PICO STREET AND EDWARDS AVE.
BAKERSFIELD CALIFORNIA

SHEET NO. E·2 OF 5 SHTS.

DIETZGEN-PRINT CLEANPRINT 1000R