

# CLASS LEASING, LLC.

1221 Harley Knox Blvd. Perris, CA 92571-7408  
 (951) 943-1908 Fax (951) 943-5768

## 4.31 CARPETING:

1. Scope of Work: Contractor shall provide all labor, materials and services to install carpeting.
2. Methodology:
  - a) Carpets shall be installed in a manner that provides a smooth, level surface. Carpet shall be installed in a manner that provides a smooth, level surface.
  - b) Carpets shall be installed in a manner that provides a smooth, level surface.

## 4.32 MATERIAL SPECIFICATIONS:

1. Structural framing shall be in accordance with the current grading rules of the Western Wood Products Association or National Grading Rules No. 10 of the Western Wood Products Association. The approved contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists. All joists shall be spaced at 16" on center.
2. Plywood shall be in accordance with the current grading rules of the Western Wood Products Association or National Grading Rules No. 10 of the Western Wood Products Association. The approved contractor shall provide a minimum of 5/8" thick plywood.
3. For other materials, the contractor shall provide a minimum of 5/8" thick plywood.

## 4.33 WORK NOT INCLUDED:

1. As a sub-contractor, the contractor shall not be responsible for the design of the building.
2. All existing, grading or other site preparation (excavation, concrete or wood leveling, etc., when required) shall be the responsibility of the owner.
3. All existing, grading or other site preparation (excavation, concrete or wood leveling, etc., when required) shall be the responsibility of the owner.

## 4.34 ACCESSIBILITY OF SITE:

1. The contractor shall provide access to the site for the installation of the building. Removal of trees, shrubs, etc., shall be the responsibility of the contractor.
2. The contractor shall provide access to the site for the installation of the building. Removal of trees, shrubs, etc., shall be the responsibility of the contractor.

## 4.35 SITE ASSEMBLY:

1. The contractor shall provide access to the site for the installation of the building. Removal of trees, shrubs, etc., shall be the responsibility of the contractor.
2. The contractor shall provide access to the site for the installation of the building. Removal of trees, shrubs, etc., shall be the responsibility of the contractor.

## 4.36 PRESURE TREATED LUMBER:

1. Pressure treated lumber shall be in accordance with the current grading rules of the Western Wood Products Association or National Grading Rules No. 10 of the Western Wood Products Association. The approved contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.
2. Pressure treated lumber shall be in accordance with the current grading rules of the Western Wood Products Association or National Grading Rules No. 10 of the Western Wood Products Association. The approved contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.

## 4.37 SOIL BEARING PRESSURE:

1. The contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.
2. The contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.

## 4.38 TEST AND INSTALLATION:

1. Provide Electrical Grounding Test per ISA in E-1.
2. Provide Electrical Grounding Test per ISA in E-1.

## 4.39 SITE INSTALLATION REQUIREMENTS FOR DSA CLASSROOM BUILDINGS:

1. The contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.
2. The contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.

## 1.471 GENERAL REQUIREMENTS:

1. The contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.
2. The contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.

## 1.472 SCOPE OF WORK:

1. The contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.
2. The contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.

## 1.473 WORK NOT INCLUDED:

1. As a sub-contractor, the contractor shall not be responsible for the design of the building.
2. All existing, grading or other site preparation (excavation, concrete or wood leveling, etc., when required) shall be the responsibility of the owner.
3. All existing, grading or other site preparation (excavation, concrete or wood leveling, etc., when required) shall be the responsibility of the owner.

## 1.474 ACCESSIBILITY OF SITE:

1. The contractor shall provide access to the site for the installation of the building. Removal of trees, shrubs, etc., shall be the responsibility of the contractor.
2. The contractor shall provide access to the site for the installation of the building. Removal of trees, shrubs, etc., shall be the responsibility of the contractor.

## 1.475 SITE ASSEMBLY:

1. The contractor shall provide access to the site for the installation of the building. Removal of trees, shrubs, etc., shall be the responsibility of the contractor.
2. The contractor shall provide access to the site for the installation of the building. Removal of trees, shrubs, etc., shall be the responsibility of the contractor.

## 1.476 PRESURE TREATED LUMBER:

1. Pressure treated lumber shall be in accordance with the current grading rules of the Western Wood Products Association or National Grading Rules No. 10 of the Western Wood Products Association. The approved contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.
2. Pressure treated lumber shall be in accordance with the current grading rules of the Western Wood Products Association or National Grading Rules No. 10 of the Western Wood Products Association. The approved contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.

## 1.477 SOIL BEARING PRESSURE:


1. The contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.
2. The contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.

## 1.478 TEST AND INSTALLATION:

1. Provide Electrical Grounding Test per ISA in E-1.
2. Provide Electrical Grounding Test per ISA in E-1.

## 1.479 SITE INSTALLATION REQUIREMENTS FOR DSA CLASSROOM BUILDINGS:

1. The contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.
2. The contractor shall provide a minimum of 2" x 4" joists and 2" x 6" joists.

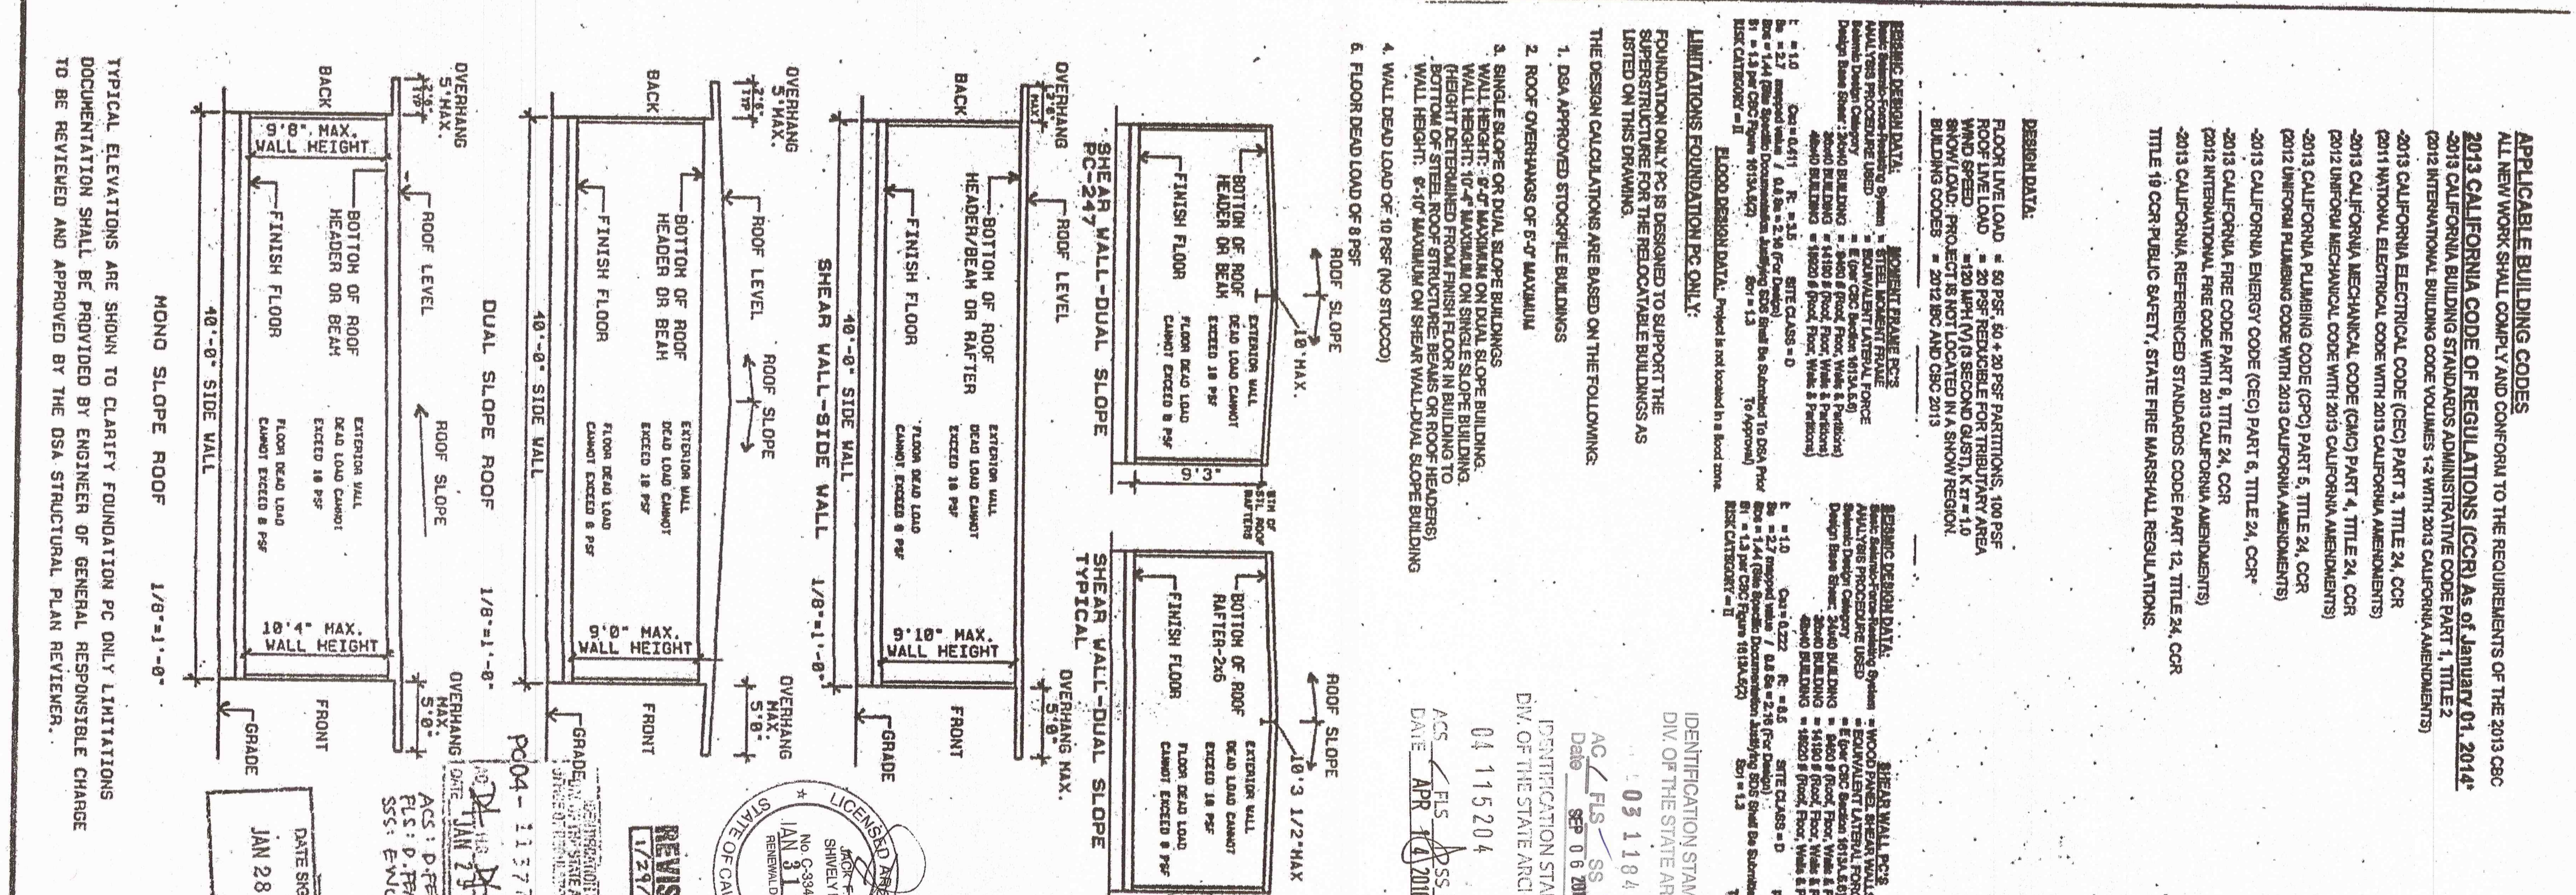

FOUNDATION NO.	FOUNDATION TYPE	FOUNDATION SIZE	FOUNDATION LOAD	FOUNDATION TYPE
101	CONCRETE	48'-0" x 10'-0"	100,000 LB	WOODEN
102	CONCRETE	48'-0" x 10'-0"	100,000 LB	WOODEN
103	CONCRETE	48'-0" x 10'-0"	100,000 LB	WOODEN
104	CONCRETE	48'-0" x 10'-0"	100,000 LB	WOODEN
105	CONCRETE	48'-0" x 10'-0"	100,000 LB	WOODEN
106	CONCRETE	48'-0" x 10'-0"	100,000 LB	WOODEN
107	CONCRETE	48'-0" x 10'-0"	100,000 LB	WOODEN
108	CONCRETE	48'-0" x 10'-0"	100,000 LB	WOODEN
109	CONCRETE	48'-0" x 10'-0"	100,000 LB	WOODEN
110	CONCRETE	48'-0" x 10'-0"	100,000 LB	WOODEN

**CLASS LEASING, LLC. PC**  
**FOUNDATION PLANS AND DETAILS**  
**STOCKPILE CLASSROOMS RELOCATION**

**Class Leasing, LLC**  
 1221 Harley Knox Blvd. Perris, CA 92571-7408  
 VOICE (951) 943-1908 FAX (951) 943-5768

**CLASS LEASING, LLC.**

DATE: 09-28-2014  
 SCALE: 1/8" = 1'-0"  
 SHEET: F1.0