

GENERAL NOTES AND SPECIFICATIONS

SECTION 1A GENERAL REQUIREMENTS

1. THE WORK SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE CALIFORNIA CODE OF REGULATIONS AND THE AMERICAN IRON AND STEEL INSTITUTE SPECIFICATIONS FOR DESIGN OF STEEL STRUCTURAL MEMBERS, A COPY OF TITLE 24 SHALL BE KEPT AT THE JOB SITE AT ALL TIMES.

2. ALL WORK SHALL BE DONE BY SKILLED ELECTRICIANS OR WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WORK AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE MATERIALS AND THE QUALITY OF THE WORKMANSHIP.

3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WORK AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE MATERIALS AND THE QUALITY OF THE WORKMANSHIP.

4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WORK AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE MATERIALS AND THE QUALITY OF THE WORKMANSHIP.

SECTION 4 STRUCTURAL STEEL FABRICATION

1. STRUCTURAL STEEL SHALL CONFORM TO ASTM A36, UNLESS OTHERWISE SPECIFIED.

2. ALL WELDS SHALL BE MADE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE MATERIALS AND THE QUALITY OF THE WORKMANSHIP.

4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE MATERIALS AND THE QUALITY OF THE WORKMANSHIP.

SECTION 7B SHEET METAL

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL INDICATED SHEET METAL.

2. SHEET METAL - STEEL SHEETS HOT DIP GALVANIZED WITH 1.25 OZ. PER SQUARE FOOT ZINC COATING CONFORMING TO ASTM A526, MINIMUM 26 GA. UNLESS OTHERWISE NOTED ON THE DRAWINGS.

3. GALVANNEAL - STEEL SHEETS GALVANNEAL WITH 1.25 OZ. PER SQUARE FOOT ZINC COATING CONFORMING TO ASTM A526, MINIMUM 26 GA. UNLESS OTHERWISE NOTED ON THE DRAWINGS.

SECTION 8B HOLLOW METAL DOORS AND FRAMES

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

SECTION 15A AIR CONDITIONING

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL THE AIR CONDITIONING SYSTEM AS SHOWN ON THE DRAWINGS AND SPECIFICATIONS, INCLUDING A/C UNITS AND ACCESSORIES, REMOTE THERMOSTATS, GRILLS AND POWER WIRING OPERATORS ON OPERATION AND MAINTENANCE OF A/C SYSTEM.

2. EQUIPMENT - ALL EQUIPMENT SHALL BE INSTALLED COMPLETE AND OPERATING WITH ALL ACCESSORIES IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

MATERIALS AND WORKMANSHIP

ALL CONTRACTORS SHALL VERIFY THAT NO ASBESTOS-CONTAINING BUILDING MATERIALS WHICH EXCEED STATE AND FEDERAL MANDATED SAFE ASBESTOS LEVELS HAVE BEEN USED IN THE CONSTRUCTION OF RELOCATING FACILITIES.

ALL WORKMEN SHALL BE SKILLED AND QUALIFIED FOR THE WORK AND SHALL BE EMPLOYED BY THE CONTRACTOR. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WORK AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE MATERIALS AND THE QUALITY OF THE WORKMANSHIP.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

DESCRIPTION	SET	FINISH	EMPH
CASING, SILL & INT. CORNER TRIM	X	16" 1/4" N	
2X FASCIA	131	3" GALV	
SOFT	131	2 1/4" GALV	
1X EXT. TRIM, WINDOWS, EXT. DOORS, EXT. TRIM	113	2" GALV	

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

1. CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND SERVICES TO INSTALL HOLLOW METAL DOORS AND FRAMES.

2. MATERIALS - TYPE L FULL FLUSH, MANUFACTURED BY AMWELD MANUFACTURING COMPANY, 18 GA. 1 3/4" THICK PER CS242 SOUND DEADEN INTERIOR.

3. WORKMANSHIP - ALL WORK SHALL BE DONE BY WELDERS WHO SHALL BE EMPLOYED BY THE CONTRACTOR AND SHALL BE RESPONSIBLE FOR THE QUALITY OF THE WELDS.

GENERAL NOTES

12 X 40 RELOCATING BUILDING

GENERAL NOTES

12 X 40 RELOCATING BUILDING

GENERAL NOTES

12 X 40 RELOCATING BUILDING

GENERAL NOTES


12 X 40 RELOCATING BUILDING

GENERAL NOTES

12 X 40 RELOCATING BUILDING

GENERAL NOTES

12 X 40 RELOCATING BUILDING

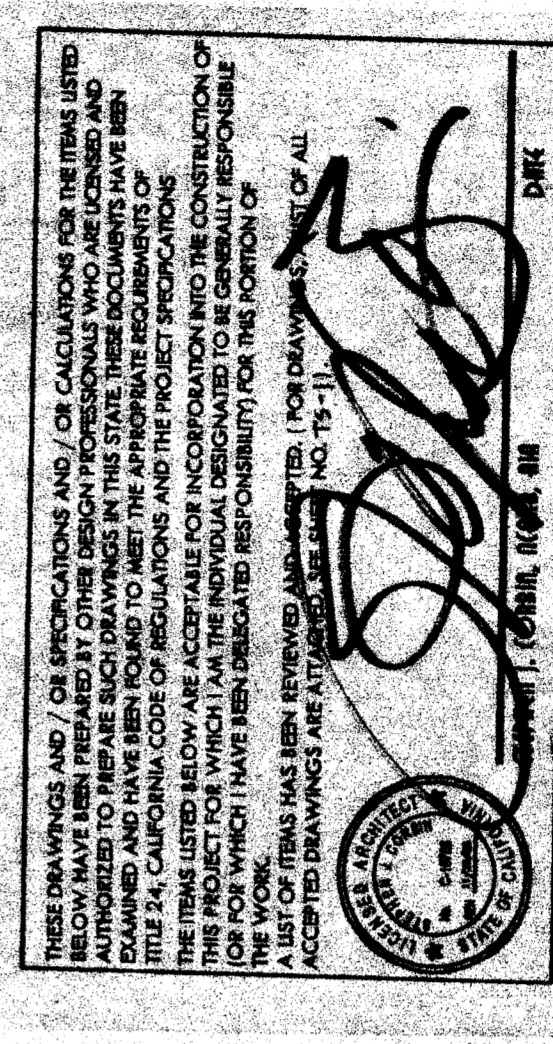

NO.	DATE	DESCRIPTION	NO.	DATE	DESCRIPTION

DATE: 05-23-00
 SCALE: NONE
 DRAWN BY: R.S.
 CHECKED BY:
 SERIAL NO.

IDENTIFICATION STAMP
 DIV. OF THE STATE ARCHITECT
 APPROX. 10-6605
 AG. A. FIS. S.S. 2
 DATE: JUN 11 2003

FILE NO.
 IDENTIFICATION STAMP
 DIV. OF THE STATE ARCHITECT
 APPROX. 10-6605
 AG. A. FIS. S.S. 2
 DATE: JUN 11 2003

APPLIC. 02-101741
 AC. 2
 FILE NO. 2000

PROJECT NO.
 SHEET NO. N-1