FINISH SCHEDULE

1. NO FINISH
2. FACTORY FINISH
3. TROWELLED SMOOTH
4. BROOMED
5. WAXED
6. NATURAL (GLAZED)
7. ENAMEL
8. ENAMEL STIPPLED
9. VINYL OR LATEX
10. INTEGRALLY COLORED
11. PAINT (EXT. GRADE)
12. STAIN
13. FINISH TO MATCH (E)

ROOM NO.	ROOM NAME	INT. ELEV.	FLOORS: PATCH (E) V.C.T.	FLOORS: (N) CARPET	FLOORS: (N) 1/2" PLYWOOD OVER (E)	FLOORS: PATCH (E) CER. TILE	FLOORS: (N) CER. TILE	FLOORS: PATCH WOOD FLOOR AS REQUIRED	FLOORS: (N) V.C.T.	FLOORS: (N) SHEET VINYL	BASES: (N) WOOD BASE	BASES: (N) R.T.S.B.	BASES: (N) 5" COVED CER. TILE	BASES: PATCH (E) COVED C.T.	BASES: REPLACE BROKEN WOOD BASE TO MATCH	BASES: (N) 5" COVED SHEET VINYL	WAINSCOT HEIGHT: (N) CER. TILE	WAINSCOT HEIGHT: PATCH (E) CER. TILE	WALLS: PATCH (E) PLASTER	WALLS: (N) 1/2" PLYWOOD	WALLS: N V.C.T.W.B.	WALLS: (N) PLASTER FINISH	WALLS: (E) PLYWOOD PANELS	CEILING HEIGHT: (N) T-BAR CEILING	CEILING HEIGHT: (E) T-BAR CEILING REPLACE STAINED DAMAGED PANELS	CEILING HEIGHT: PATCH (E) PLASTER AS REQUIRED	CEILING HEIGHT: (E) 24"x24" ACOUSTIC TILE, REPLACE AS REQUIRED	CEILING HEIGHT: (N) PLASTER CEILING	CEILING HEIGHT: (E) 12"x12" ACOUSTIC TILE, REPLACE AS REQUIRED	CEILING HEIGHT: (N) 1/8" VENEER PLASTER	TRIM: (N) WOOD TRIM	REMARKS
1	BOYS	1/A-4				2								2					7														
2	ENTRY	—	2										7							7														
3	GIRLS	3/A-4				2								2					7														
4	KITCHEN	—	2										7						7														
5	STORAGE	—																		7													
6	STAIRS	—																															
7	MULTI-PURPOSE	—	2										7						7	2										9		7	
8	STORAGE / H.C. LIFT	8/A-4					13												7		7												
9	REGULAR STAGE	—					13												7		7												
10	CLASSROOM	10/A-4	2			2					2								7	2						2	7					7	
11	CLASSROOM	—	2								2								7	2						2	7					7	
12	CLASSROOM	12/A-4	2			2					2								7	2						2	7					7	
13	CLASSROOM	13/A-4	2								2								7	2						2	7					7	
14																																	
15																																	
16																																	
17																																	
18																																	
19																																	
20																																	
21	GIRLS	21/A-4				2								2				2	7														
22	BOYS	22/A-4				2								2				2	7														
23	TEACHERS WORKROOM	23/A-4	2								2								7	2							7			9			
24	CUSTODIAN	—																															
25	TOILET	25/A-4				2								2			48"↓ 7'-3"	2	7														
26	SHOWER	26/A-4				2								2			TO CEILING	2	7														
27	WATER HEATER	—																															
28																																	
29																																	
30																																	
31	RECEPTION	—	2								2								7											9			
32	PRINCIPAL	—		2							2								7											9			
33	TOILET	—																															
34	SHOWER	—																															
35	STORAGE	35/A-4	2								7								7		7									7			
36	TOILET	—																															
37	TEACHERS LOUNGE	37/A-4	2								2								7	2	7									7			
38																																	
39																																	
40																																	
41	CLASSROOM	41/A-4	2	2							2									2	7									9		7	
42																																	
43																																	
44	CLASSROOM	44/A-4	2	2							2									2	7									9		7	
45																																	
46																																	
47	COMPUTER CLASSROOM	47/A-4	2			2					2								7	2							7					7	
48	WOODWORK	48/A-4		1							7								7								7					7	
49	TOILET	49/A-4				2								2					7														

NEW CABINET SCHED.

SYMBOL	W.I.C.#	DIM. IN INCHES
* /1	531R	42 84 24
* /2	401	18 84 24
* /3	162R	48 33 24
* /4	531	46 84 24
* /5	162R	36 36 24
* /6	302	36 36 12
* /7	302	42 36 12
* /8	222	42 36 24
* /9	302	48 48 12
* /10	402	36 84 24
* /11	402	36 84 24
* /12	302	36 18 12
* /13	300	36 21 12
* /14	102	36 36 12
* /15	300	48 21 12
* /16	102	48 36 12
* /17	531	42 84 24
* /18	302	30 48 12
* /19	300	48 24 12
R		REVISED OR MODIFIED SEE DRAWINGS
*		FIELD VERIFY SPACES FOR CABINES

BLUEPRINT SERVICE 110183

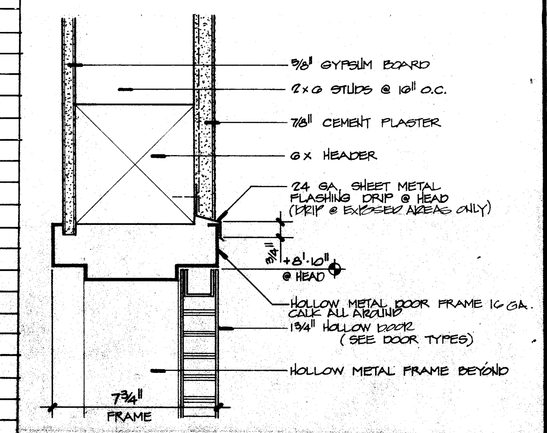

TRANSOM PANEL HEAD/JAMB SIM. 3"

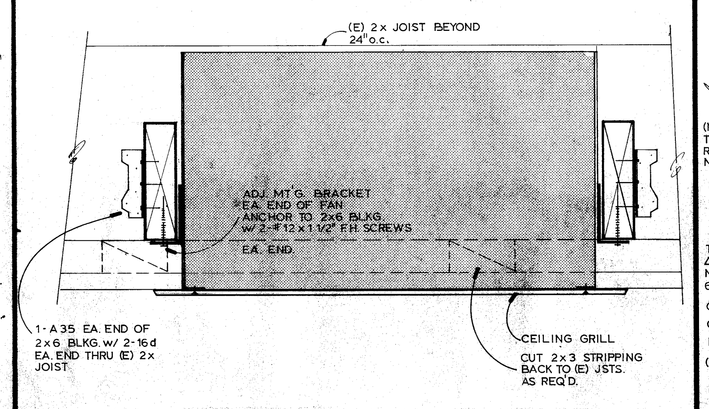

EXH. FAN MOUNTING DETAIL 3"

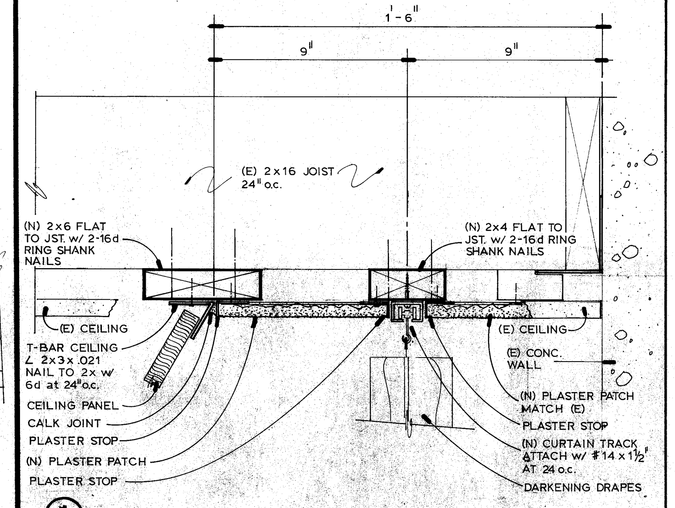

1 CURTAIN TRACK DETAIL 3"

DOOR SCHEDULE

DOOR NO.	DOOR: TYPE	DOOR: SIZE	DOOR: MATERIAL	FRAME: MATERIAL	LABEL	HDWR. SET	LOCK	REMARKS
1	A	PAIR OF 2'6" 7'0"	WOOD	WOOD				(E) PANIC , NO CHANGE
2	A	PAIR OF 2'6" 7'0"	WOOD	WOOD				(E) PANIC, NO CHANGE
3	A	PAIR OF 3'0" 7'0"	WOOD	WOOD				(E) PANIC, NO CHANGE
4	A	PAIR OF 3'0" 7'0"	WOOD	WOOD				(E) PANIC, NO CHANGE
5	A	PAIR OF 3'0" 7'0"	WOOD	WOOD				(E) PANIC, NO CHANGE
6	C	3'0" 7'0"	H.M.	WOOD				NO CHANGE
7	C	4'0" 9'0"	H.M.	WOOD				NO CHANGE
8	C	2'8" 7'0"	H.M.	WOOD				NO CHANGE
9	A	(N) PAIR OF 3'0" 7'0"	H.M.	METAL		1		(E) DOOR REMOVE REPLACE PER SCHED
10	C	3'0" 7'0"	WOOD	WOOD				NO CHANGE
11	C	2'6" 7'0"	WOOD	WOOD		2		REVERSE SWING, REPLACE HDWR. (N) H.C. SIGN
12	C	2'6" 7'0"	WOOD	WOOD		2		REVERSE SWING, REPLACE HDWR. (N) H.C. SIGN
13	C	2'8" 7'0"	WOOD	WOOD				NO CHANGE
14	C	PAIR OF 2'6" 7'0"	WOOD	WOOD				NO CHANGE
15	C	PAIR OF 2'6" 7'0"	WOOD	WOOD				NO CHANGE
16	C	2'6" 7'0"	WOOD	WOOD				NO CHANGE
17	B	3'0" 7'0"	WOOD	WOOD				NO CHANGE
18	C	(N) *	H. M.	METAL	45	3		REMOVE (E) 2'6" 7'0" INSTALL (N) DOOR & FRAME - MIN. CLEAR DOOR OPENING TO MATCH (E) FACE OF STOP TO FACE OF STOP 32" (ILC)
19		OMITTED				4		
20	C	(N) *	H.M.	METAL	45	3		REMOVE (E) DOOR INSTALL (N) DOOR & FRAME - MIN. CLEAR DOOR OPENING TO MATCH (E) FACE OF STOP TO FACE OF STOP 32" (ILC)
21	G	PAIR OF 3'0" 7'0"	WOOD	WOOD				(E) PANIC
22	B	3'6" 7'0"	WOOD	WOOD		5		REPLACE HDWR.
23	B	3'6" 7'0"	WOOD	WOOD		5		REPLACE HDWR.
24	B	3'6" 7'0"	WOOD	WOOD		5		REPLACE HDWR.
25	B	3'6" 7'0"	WOOD	WOOD		5		REPLACE HDWR.
26	C	3'0" 7'0"	H.M.	WOOD				NO CHANGE
27	C	3'0" 6'8"	WOOD	WOOD		6		REPLACE HDWR.
28	C	(N) 3'0" 6'8"	SOLID CORE	WOOD		7		(N) H.C. SIGN
29	D	(N) 3'0" 6'8"	SOLID CORE	WOOD		8		(E) DOOR REMOVE REPLACE PER SCHED.
30	C	3'0" 6'8"	WOOD	WOOD				REVISE JAMB - SWING (E) DOOR OUT
31	C	3'0" 6'8"	WOOD	WOOD		9		REPLACE HDWR. (N) H.C. SIGN
32	C	3'0" 6'8"	WOOD	WOOD		9		REPLACE HDWR. (N) H.C. SIGN
33	C	3'0" 6'8"	WOOD	WOOD		10		REPLACE HDWR.
34	C	3'0" 6'8"	WOOD	WOOD		10		REPLACE HDWR.
35	B	3'0" 6'8"	SOLID CORE	WOOD		11		REPLACE HDWR.
36	G	(N) 3'0" 6'8"	" "	"				REMOVE (E) DOOR
37	C	2'4" 6'8"	WOOD	WOOD				NO CHANGE
38	C	3'0" 6'8"	WOOD	WOOD		12		REPLACE HDWR.
39	C	2'4" 6'8"	WOOD	WOOD				NO CHANGE
40								(E) SHOWER GLASS DOOR
41	C	2'8" 6'8"	WOOD	WOOD				NO CHANGE
42	C	2'8" 6'8"	WOOD	WOOD				NO CHANGE
43								REMOVE (E) DOOR
44	C	2'4" 6'8"	WOOD	WOOD				NO CHANGE
45	C	3'6" 6'8"	WOOD	WOOD		5		REPLACE HDWR. 1 PER 'R' TOTAL OF (2)
46	C	3'6" 6'8"	WOOD	WOOD		5		REPLACE HDWR. 1 PER 'R' TOTAL OF (2)
47	F	PAIR OF 3'0" 6'8"	WOOD	WOOD		13		REPLACE HDWR.
48	C	3'0" 6'8"	WOOD	WOOD		5		REPLACE HDWR.
49	C	3'0" 6'8"	WOOD	WOOD				NO CHANGE
50	C	(N) 3'0" 6'8"	SOLID CORE	WOOD		14		
51	C	(N) 3'0" 6'8"	SOLID CORE	WOOD		2		(N) H.C. SIGN
52	C	3'0" 7'0"	WOOD	WOOD				NO CHANGE
53	C	3'0" 7'0"	WOOD	WOOD				NO CHANGE
54	C							REMOVE (E) DOOR & JAMB - PATCH WALL
55	C	3'0" MIN. WD.				15		(N) SHOWER GLASS DOOR
56	C	2'0" 6'8"	WOOD	WOOD		12		

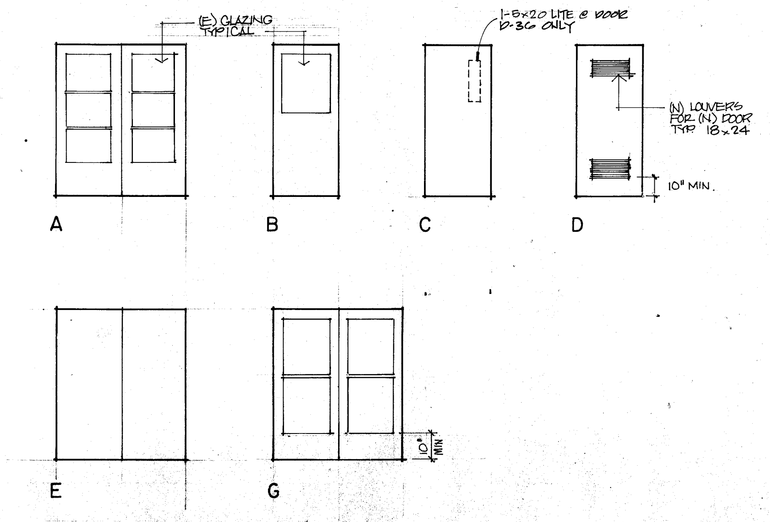

GENERAL NOTES

ALL DOORS AND JAMBS SHALL BE PAINTED INCLUDING THOSE NOTED NO CHANGE
DIMENSIONS SHALL ALL BE FIELD VERIFIED **

* FIELD VERIFY (E) CONDITIONS - MIN. CLEAR WIDTH FACE OF STOP TO FACE OF STOPS 32" CLEAR SEE DETAIL 3/A-C

Note:
ALL H.M. DOORS 1-3/4" (18 GA. STEEL) GALVANIZED W/ A ZINC COATING PT. 1.25.03, PER 450 FT.
ALL H.M. JAMBS SHALL BE 16 GA. - 2" FACE FRAMES UNLESS DETAILED OTHERWISE.

** ALL WOOD DOORS SHALL BE 1 3/4" SOLID CORE, EXTERIOR DOORS RECEIVE PAINT, ALL INTERIOR DOORS SHALL BE WOOD GRAIN, STAIN & SEALED, OF SELECTED BIRCH
EXTERIOR DOORS SHALL BE "PAINT GRADE"

STATE OF CALIFORNIA APPROVED ACCESS COMPLIANCE SECTION
53288 MAR 27 '90
APPLICATION PER W. Joel Bain

ROBERT F. STUHR ARCHITECT INC.
3121 CALIFORNIA AVE.
BAKERSFIELD CA. 93304
(805) 327-1632

ROBERT F. STUHR AIA C-1610
WILLIAM J. MELBY AIA C-16835
DANNY E. ORDIZ AIA C-14728

IDENTIFICATION STAMP
Department of General Services
Office of the State Architect
AUG 24 1990
Structural Safety Section
DSA 53288 18 mw/ub

FINISH/ DOOR/ CABINET SCHEDULES

RAFER JOHNSON SCHOOL
1001 10TH. ST., BAKERSFIELD, CA.

BAKERSFIELD CITY SCHOOL DISTRICT
KERN COUNTY, CALIFORNIA

CHECK AND VERIFY ALL DIMENSIONS BEFORE PROCEEDING WITH THE WORK REPORT DISCREPANCIES TO THE ARCHITECT. ALL CONSTRUCTION SHALL CONFORM TO UBC.

MARK	DATE	REVISIONS
1		
2		
3		
4		
5		

JOB NO. 644
DRAWN: E.V.C.
CHECKED:
DATE:

A 8 OF 9 SHEETS