

- DEMOLITION PLAN NOTES**
- REMOVE EXISTING FINISH FLOOR MATERIAL.
 - REMOVE EXISTING FLOOR BASE.
 - REMOVE EXISTING CERAMIC TILE FLOORING.
 - REMOVE EXISTING GYM TILES, MOLDINGS AND TRIM IN THIS ROOM AREA WILL INTERFERE WITH THE INSTALLATION OF WALL FINISHES.
 - REMOVE EXISTING CHALKBOARDS.
 - REMOVE EXISTING TACK BOARDS.
 - REMOVE EXISTING WALL.
 - REMOVE EXISTING DOOR, HARDWARE AND FRAME.
 - REMOVE EXISTING DOOR AND HARDWARE.
 - REMOVE PORTION OF EXISTING CABINET (WINDOW REFER TO INTERIOR ELEVATION).
 - REMOVE EXISTING CABINET HARDWARE AND SPLASHES.
 - REMOVE EXISTING COUNTERTOPS AND SPLASHES.
 - REMOVE EXISTING BRACKET, COAT HOOKS, AND 151 REMOVE EXISTING SHELF AND SUPPORTING BRACKET.
 - REMOVE EXISTING BOOKCASE.
 - REMOVE EXISTING CABINET.
 - REMOVE EXISTING JUNK HEATER (REFER TO MECHANICAL PLANS).
 - REMOVE EXISTING PAPER TOWEL DISPENSERS, SOAP DISPENSERS AND HANDBOS WIPERS BRACKET.
 - REMOVE EXISTING STEEL ROAD DISPENSER COUNTERTOP AND SPLASH ARE INSTALLED.

FLOOR PLAN NOTES

ALL NOTES IN THIS COLUMN ARE TO BE USED FOR DRAWINGS ON THIS SHEET ONLY. NOTES LISTED IN THIS COLUMN WHICH ARE NOT INDICATED ON THE DRAWING SHALL BE DISREGARDED.

- PREPARE SUBFLOOR SURFACE TO ACCEPT
- PATCH FLOOR WITH MATERIAL AND COLOR TO MATCH EXISTING.
- PROVIDE AND INSTALL VINYL COMPOSITION TILE.
- PROVIDE AND INSTALL CARPET.
- REPAIR, PATCH AND PREPARE WALL SURFACE TO ACCEPT FINISH WALL MATERIAL.
- PROVIDE AND INSTALL 1/2" x 1/2" x 1/2" CERAMIC CARPETBACKED ALL CEMENTRY IN THIS ROOM IS EXISTING TO BE REPAIRED AND RENOVATED UNLESS NOTED OTHERWISE (REFER TO INTERIOR ELEVATIONS).
- PROVIDE AND INSTALL LAMINATED PLASTIC COVERED BOOKCASE AND ADJUSTABLE SHELVES.
- PROVIDE AND INSTALL UPPER BOOKCASE.
- PROVIDE AND INSTALL COAT HOOKS.
- PROVIDE AND INSTALL SHELS.
- PROVIDE AND INSTALL UPPER BOOKCASE.
- PROVIDE AND INSTALL CHALKBOARD.
- REFER TO INTERIOR ELEVATIONS.
- PROVIDE AND INSTALL SINK (REFER TO FLOORING PLANS).
- PROVIDE AND INSTALL UNIT VENTILATOR (REFER TO MECHANICAL PLANS).
- PROVIDE AND INSTALL SOAP DISPENSER.
- PROVIDE AND INSTALL PAPER TOWEL DISPENSER.
- REFRIGERATOR SPACE.
- PROVIDE AND INSTALL BASE CABINET.

- WALL LEGEND**
- EXISTING WALL TO REMAIN
 - EXISTING WALL TO BE REMOVED
 - EXISTING WALL WITH WINDOWS TO REMAIN
 - CONSTRUCT STUD WALL (PARTIAL HEIGHT)
 - CONSTRUCT STUD WALL
 - CONSTRUCT STUD WALL (PARTIAL HEIGHT)

KEY PLAN

WASHINGTON JUNIOR HIGH SCHOOL MODERNIZATION

BAKERSFIELD CITY CENTRAL DISTRICT

PROJECT

WALL LEGEND

EXISTING WALL TO REMAIN

EXISTING WALL TO BE REMOVED

EXISTING WALL WITH WINDOWS TO REMAIN

CONSTRUCT STUD WALL (PARTIAL HEIGHT)

CONSTRUCT STUD WALL

CONSTRUCT STUD WALL (PARTIAL HEIGHT)

REVISIONS


DATE	BY	REVISIONS
5/17/77	ES	ISSUED FOR BIDDING
8/2/77	ES	REVISED

APPROVED ARCHITECT
Terry M. Paxon MA

DESIGNED BY
ES

SHEET NUMBER
A-3

23 SHEETS

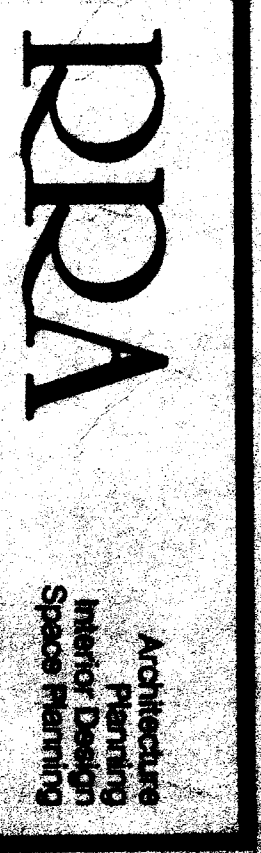

Rento-Russell & Associates, Inc.

4800 Sycamore Highway, Suite 200, Westchester, California 93791

CONSULTANTS

BAKERSFIELD CITY CENTRAL DISTRICT

WASHINGTON JUNIOR HIGH SCHOOL MODERNIZATION

WASHINGTON JUNIOR HIGH SCHOOL MODERNIZATION

BAKERSFIELD CITY CENTRAL DISTRICT

FLOOR PLANS

BUILDINGS D, E, F

A-3