

COOLING CONTROL SCHEDULE		VALUE 1-2		VALUE 1-3		PUMPS	
MODE	CHILLER	ICE BLDG	CHILLER	ICE BLDG	CHILLER	ICE BLDG	SYSTEM
COOLING MODE	A	B	A	B	CHILLER	ICE BLDG	SYSTEM
CHILLER ONLY COOLING	ON	CL	CL	OP	ON	OFF	ON
ICE BUILDER ONLY COOLING	MOD	MOD	CL	OP	OFF	ON	ON
ICE BLDG ONLY COOLING	CL	OP	OP	CL	ON	ON	OFF
CHILLER/ICE BLDG COOLING	MOD	MOD	CL	MOD	ON	ON	ON

* VALUE 1-3 CONSISTS OF 2 INDEPENDENTLY CONTROLLED 2-WAY MODULATING VALVES

CENTRAL PLANT HEATING AND COOLING SEQUENCE OF OPERATION

HEATING
 THE LEAD BOILER AND PUMP START AS A FUNCTION OF THE EMS/CPU (ENERGY MANAGEMENT SYSTEM) CENTRAL PROCESSING UNIT WHICH IS PROGRAMMED TO CONSIDER TIME OF DAY AND OUTSIDE AIR TEMPERATURE. THE BOILER FLOW SWITCH, THE EMS/CPU WILL MONITOR THE LEADING AND EXITING WATER TEMPERATURES TO THE BOILER AND WILL PROVIDE A STRAIGHT-LINE HOT WATER RESET. WHEN THE O.A. IS 30° F. THE HOT WATER TEMPERATURE SHALL BE 180° F. AND BE PROGRAMMED SO THAT AN INCREASING OUTSIDE AIR TEMPERATURE OF LESS THAN 60° (SOFTWARE ADJUSTABLE) TO THE BOILER WILL CAUSE THE "BOILER LOOP MIXING VALVE" V-1 TO MODULATE OPEN AND BYPASS SUPPLY HOT WATER DIRECTLY BACK TO THE RETURN. THE BOILER PUMP (AS DETERMINED BY TEMPERATURE DIFFERENCE ACROSS THE BOILER), TYPICAL OF THE LEAD AND LAG BOILERS.

THE LAG BOILER AND PUMP WILL START WHEN THE SYSTEM HEATING DEMAND BEYOND THE EDMS 90% OF THE BOILER OUTPUT CAPACITY AND WILL SHUT OFF AT 75% CAPACITY OF THE BOILER. A TIME DELAY ON THE LAG BOILER WILL ALLOW THE LEAD BOILER A 30 MINUTE HEAD START TO BRING THE SYSTEM UP TO 50% CAPACITY DURING NORMAL HOURS.

COOLING
 COOLING FROM THE CENTRAL SYSTEM CAN BE SUPPLIED UNDER ANY ONE OF THREE DIFFERENT MODES: 1) CHILLER ONLY, 2) ICE TANKS ONLY, AND 3) COOLING FROM BOTH. COOLING MODES TO BE USED IS PRIMARILY DETERMINED BY TIME-OF-DAY AS ESTABLISHED BY THE PEAK RATE SCHEDULE, A-11, TIME-OF-USE METERS.

THE INTENT OF THE SYSTEM DESIGN IS OPTIMIZE COOLING PERFORMANCE BY:

1. NOT ALLOWING THE CHILLER AND CHILLER PUMP TO START DURING "NON-PEAK" HOURS AS DEFINED BY PEAK RATE STRUCTURE A-11.
2. RUNNING THE CHILLER AT FULL-LOAD DURING "OFF-PEAK" HOURS TO MAXIMIZE TANK CHARGING.
3. MAINTAIN CHILLER USING THE NEXT DAY DURING "PARTIAL-PEAK" HOURS BY USING UP STORED ICE FROM THE NIGHT BEFORE. SOME OPERATION DURING "PARTIAL-PEAK" HOURS WILL OCCUR BUT IN NO CASE SHOULD THE ICE STORAGE CAPACITY AT THE END OF THE DAY EXCEED 20% OF TOTAL STORAGE CAPACITY.
4. ALLOW SCHOOL PERSONNEL TO INTERACT WITH THE LOCAL EMS/CPU FOR SPECIAL PROGRAMMING THAT MAY BE REQUIRED ON ANY PARTICULAR DAY.


WHEN THE OUTSIDE AIR SENSOR SENSES A TEMPERATURE ABOVE 75°, THE CHILLED WATER PUMP, MARK 2, WILL START. WHEN FLOW HAS BEEN ESTABLISHED THROUGH THE CHILLED WATER LOOP FLOW SWITCH, THE AIR COOLED CHILLER WILL BE ABLE TO START DRAIN A SIGNAL FROM THE EMS/CPU.

A MIXING VALVE PLACED IN THE CHILLED WATER LOOP WILL BE CONTROLLED BY THE EMS/CPU AND WILL BYPASS CHILLED WATER FROM THE CHILLER TO THE CHILLED WATER PUMP. THE VALVE WILL BE FULLY OPEN, THE CHILLED WATER PUMP SHALL STAY ON AN ADDITIONAL 5 MINUTES AFTER SHUTDOWN OF THE CHILLER.

THE SYSTEM PUMP, MARK 4, WILL BE DIRECTED TO START BY THE EMS/CPU UPON A CALL FROM EITHER HEATING OR COOLING. IT WILL START ON FOR THE DURATION MATCH THE LEAD AND LAG BOILER OR CHILLER LOOP PUMP. THE SECOND SYSTEM PUMP, ALSO MARK 4, WILL COME ON AT ANY TIME DURING THE DAY AS REQUIRED BY THE COOLING OR HEATING "STAY" REQUIREMENTS OF THE SYSTEM.

SYSTEM LOOP PRESSURIZATION
 A SYSTEM PRESSURE TRANSDUCER IS LOCATED IN THE LOOP DRIVING TO SESE SYSTEM AND IS MONITORED AND RECORDED AT LEAST ONCE PER HOUR. THE SYSTEM PRESSURE SHALL BE APPROXIMATELY 60 PSI. THE SYSTEM PRESSURE SHALL BE CHECKED EACH MORNING, PRIOR TO STARTUP, BY THE EMS/CPU. IF SYSTEM PRESSURE SHOULD FALL MORE THAN 15% BELOW THIS INITIAL VALUE, THE SYSTEM SHALL INITIALLY FILL WITH WATER TO THE INITIAL SYSTEM LOOP PRESSURE. IF THE SYSTEM PRESSURE SHOULD FALL MORE THAN 15% BELOW THIS INITIAL VALUE, THE SYSTEM SHALL INITIALLY FILL WITH WATER TO THE INITIAL SYSTEM LOOP PRESSURE. IF THE SYSTEM PRESSURE SHOULD FALL MORE THAN 15% BELOW THIS INITIAL VALUE, THE SYSTEM SHALL INITIALLY FILL WITH WATER TO THE INITIAL SYSTEM LOOP PRESSURE. IF THE SYSTEM PRESSURE SHOULD FALL MORE THAN 15% BELOW THIS INITIAL VALUE, THE SYSTEM SHALL INITIALLY FILL WITH WATER TO THE INITIAL SYSTEM LOOP PRESSURE.

POINT #	DESCRIPTION OF CONTROL POINT
1	SYSTEM RETURN WATER TEMPERATURE
2	SYSTEM SUPPLY WATER TEMPERATURE
3	WATER TEMPERATURE LEAVING BOILER #1
4	WATER TEMPERATURE LEAVING BOILER #2
5	HOT WATER TEMPERATURE SUPPLY TO MAIN LOOP
6	WATER TEMPERATURE LEAVING ICE BANK
7	CHILLED WATER LOOP SUPPLY TEMPERATURE
8	WATER TEMPERATURE LEAVING CHILLER
9	SYSTEM LOOP FLOWMETER
10	SYSTEM LOOP PRESSURE
11	OUTSIDE AIR SENSOR
12	SYSTEM PRESSURE TRANSDUCER
13	PLUSE RESET SWITCH FROM UTILITY METER
14	SPACE

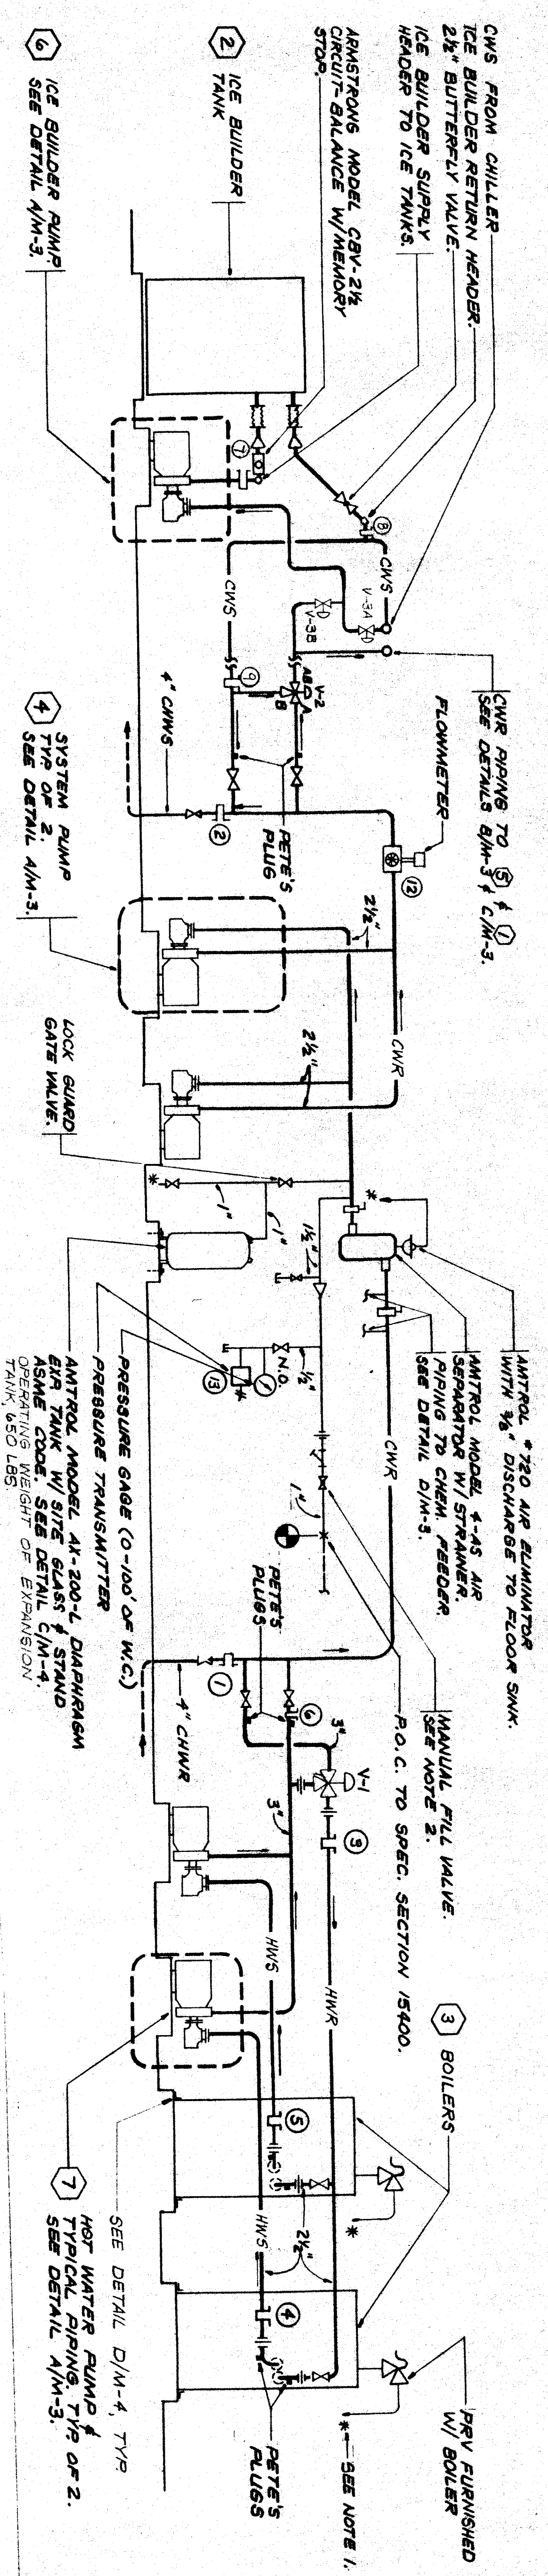


CENTRAL SYSTEM PIPING AND FLOW DIAGRAM

DETAIL

NOTES:
 1. PIPING SYMBOLIZED WITH * INDICATES PIPING TO BE ROUTED DOWN TO NEAREST FLOOR SURFACE +4'. PIPING SO ROUTED FROM PRESSURE RELIEF VALVES SHALL BE FULL SIZE AND SHALL BE SUPPORTED INDEPENDENTLY SO THAT NO WEIGHT IS APPLIED TO THE P.V.
 2. MANUAL FILL VALVE WITH LABEL TO READ: "MANUAL FILL VALVE IS ONLY TO BE USED TO FILL SYSTEM UPON START-UP OR LOSS OF SYSTEM FLUID AS DETERMINED BY SYSTEM PRESSURE. VALVE SHALL BE LEFT IN THE NORMALLY CLOSED POSITION."

EXPANSION TANK MOUNTING

DETAIL

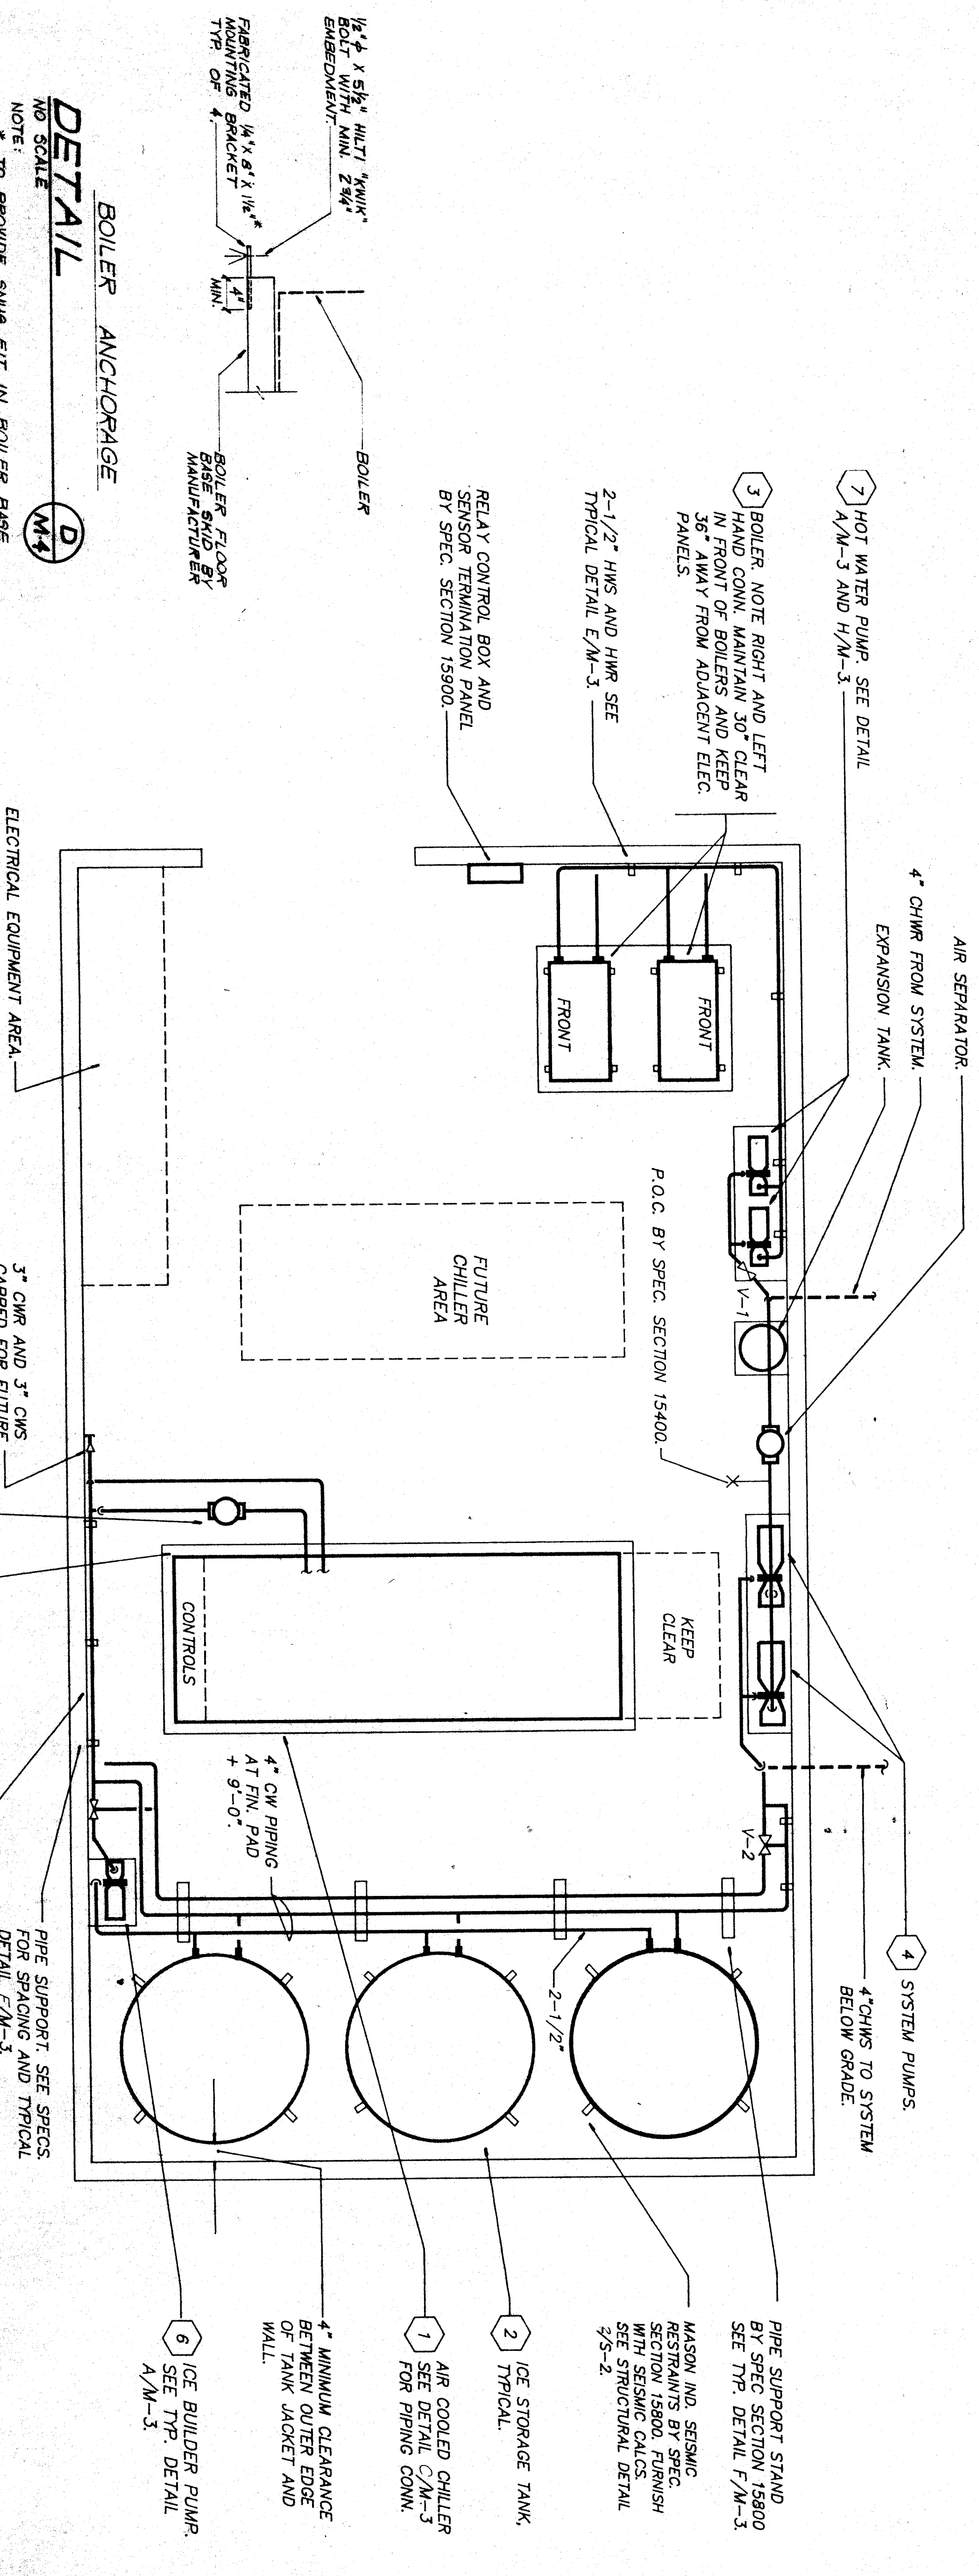

MECHANICAL EQUIPMENT ENCLOSURE

DETAIL

NOTE: TO PROVIDE SNUG FIT IN BOILER BASE

NOTES:
 1. PIPING LAYOUT SHOWN ABOVE IS DIAGRAMATIC.
 2. CONTRACTOR TO PROVIDE COMPLETE SYSTEM PIPING ISOMETRIC FOR REVIEW ALONG WITH EQUIPMENT AND MATERIAL SUBMITTALS.

RENPRO RUSSELL & ASSOCIATES
 Architects • Engineers • Interior Design/Construction Planning

4400 Sandstone Highway, Suite 301, Bakersfield, California 93309-3877 (805) 338-7800

CONSULTANTS:
 FRANK TITTEL, ESTIMATOR
 JOHN FRANK MITCHELL, INC., CONSULTING MECHANICAL ENGINEERS
 444 WEST AVENUE, SUITE 100, BAKERSFIELD, CALIFORNIA 93301 (805) 338-7800

PROJECT:
BAKERSFIELD CITY SCHOOL DISTRICT

WASHINGTON JUNIOR HIGH SCHOOL MODERNIZATION

DATE: 12/11/89
 DRAWN BY: MWD
 PROJECT NO: 84-216W

APPROVED: ARCHITECT
 CHECKED: JEM
 DATE: 5/1/89

SHEET NUMBER: **M-4**

DATE: 12/11/89
 ISSUED FOR: BIDDING

DATE: 12/11/89
 REVISIONS:

MECHANICAL EQUIPMENT ENCLOSURE

MECHANICAL EQUIPMENT ENCLOSURE

MECHANICAL EQUIPMENT ENCLOSURE