

- SHEET NOTES -**
- 1 CONTROL JOINT (LOCATIONS MAY VARY)
 - 2 STANDING SEAM METAL ROOFING
 - 3 OVERHANG
 - 4 TYPICAL EXTERIOR DOOR
 - 5 WINDOW SEE SPEC'S
 - 6 HVAC UNIT (LOCATION MAY VARY)
 - 7 SYNTHETIC STUCCO FINISH
 - 8 DOWNSPOUT (QUANTITY & LOCATION MAY VARY)
 - 9 ROOM ID AND ISA SIGNAGE (BY OWNER) TYP. REFER TO DETAILS S/AD AND 9/AD
 - 10 GUTTER
 - 11 EXTERIOR LIGHT FIXTURE TYP
 - 12 MODULAR IDENTIFICATION TAG, +90" ABOVE F.F.
 - 13 FIRE ALARM HORN (REFER TO E1)
 - 14 WP/G.F.C.I TYP. Ⓞ HVAC UNITS SEE ELECTRICAL SHEETS.
- R RAMP NOT SHOWN FOR RAMP DETAILS REFER TO SHEET S6R

MODULE SCHEDULE

BLDG SIZE (FT)	TOTAL # OF 10' WIDE MODULES	"A" TOTAL # OF CENTER MODULES	"B" TOTAL BLDG WIDTH
30x32	3	1	30'-0 1/2"
40x32	4	2	40'-0 1/2"
50x32	5	3	50'-1"
60x32	6	4	60'-1 1/2"
70x32	7	5	70'-1 1/2"
80x32	8	6	80'-1 1/2"
90x32	9	7	90'-2"
100x32	10	8	100'-2 1/4"
110x32	11	9	110'-2 1/4"
120x32	12	10	120'-2 1/4"

* IF EXCEEDS 27" PROTECTIVE GUARDS SHALL BE INSTALLED (BY OWNER)


REVISIONS

NO	DATE	DESCRIPTION


DATE: 07/01/09
SCALE: NOTED
DRAWN BY: MP
SERIAL NO.:

CUSTOMER: BAKERSFIELD CITY SCHOOLS
FREMONT ELEMENTARY SCHOOL

2 1/2:12 PITCHED ROOF 30' x 32' RELOCATABLE BUILDINGS
TYPICAL EXTERIOR ELEVATIONS (SYNTHETIC STUCCO OPTION)

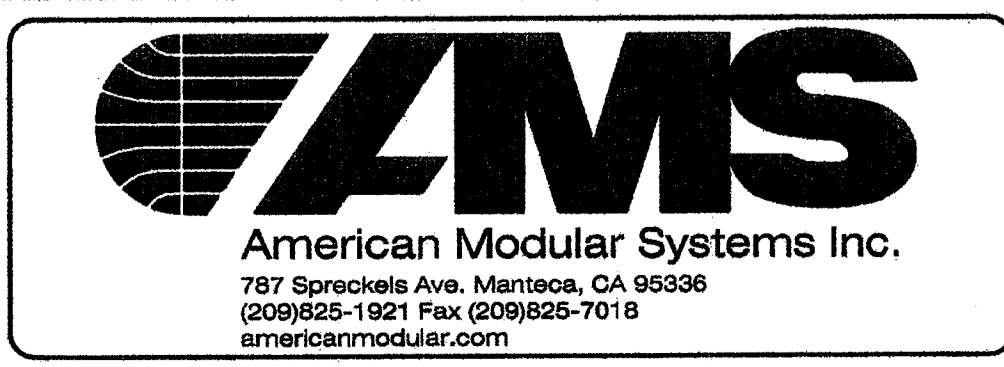

APPROVALS:

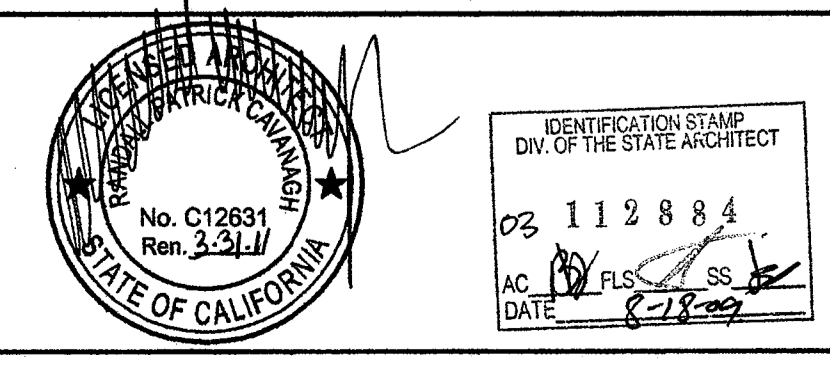

IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
OFFICE OF REGULATION SERVICES
AC: FLS SS
DATE: 8-18-09

PROJECT NO.
A5

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF AMERICAN MODULAR SYSTEMS AND ARE NOT TO BE REPRODUCED, CHANGED OR COPIED IN ANY FORM OR MANNER, NOR ARE THEY TO BE ASSIGNED TO ANY THIRD PARTY WITHOUT THE WRITTEN AUTHORIZATION OF AMERICAN MODULAR SYSTEMS.