


3 TYPICAL CLASSROOM REAR END WALL ELEVATION A3 /3/8"=1'-0"

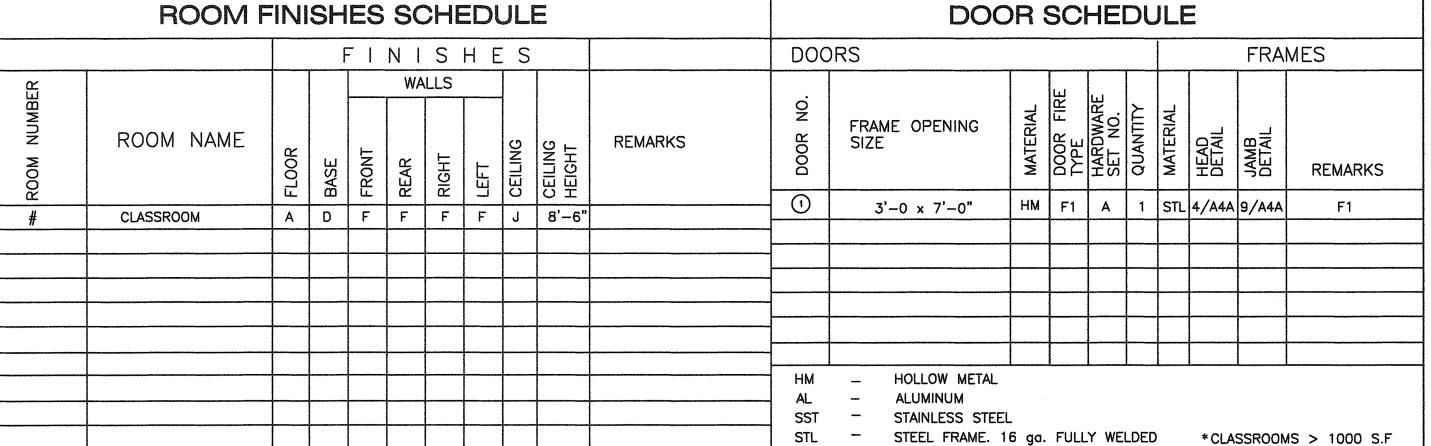

- A CARPET PER STATE OF CALIF SPEC COMPLYING WITH GROUP 1, TYPE A OR
- TYPE B, CLASS 2, DENSITY 4600, DIRECT GLUE DOWN.
- B VINYL SHEET FLOORING
- C VCT. ARMSTRONG STANDARD OR EXCELON D - TOP SET BASE. 4" BURKE
- E TOP SET BASE. 6" BRINGANTINE OR SANDOVAL
- F WALL FINISH. 1/2" VINYL TACKBOARD CLASS 1 OVER 1/2" GYP BOARD BACKING
- G 1/2" W.R. GYP BOARD. TAPE, TEXTURE, PAINTED FINISH
- H 1/2" GYP BOARD. TAPE, TEXTURE, PAINTED FINISH
- | 3/32" F.R.P. OVER 1/2" W.R. GYP BOARD
- J ACOUSTICAL LAY IN GRID CEILING PANELS (SEE SPECIFICATIONS)
- K 1/2" VINYL TACKBOARD CLASS 1 OVER 5/8" TYPE "X" GYP BOARD BACKING
- L 5/8" TYPE 'X' GYP BOARD. TAPE, TEXTURE, PAINTED FINISH

€ C				_	U	T ()		2	10	טכ	REWARKS	
0	3'	'-0 × 7'-	-0"	НМ	F1	Α	1	STL	4/A4A	9/A4A	F1	
	the militaria de la mineral de la constanta de											-
			······································					-				$\ \ $
 												$\ \ $
												$\ \cdot \ $
												11
 НМ		HOLLOW			A constant and a second				1			
 AL		ALUMINU	M									

WINDOW WALL FRAME SOLID CORE WOOD

HOLLOW CORE WOOD


WILL RE'Q PANIC HARDWARE PER CBC 1008.1.9

NOTE: REFER TO SHEETS A5A, A6A & A7A FOR HEAD & JAMB DOOR DETAILS W/ OPTIONAL EXTERIOR FINISHES


WINDOW SCHEDULE											
WINDOW NO.	AMT.	TYPE	WIDTH	HEIGHT	FINISH	GLASS TYPE	U-FACTOR	SHGC			
<u>(1)</u>	2	SLIDER	8'-0"	4'-0"	BRONZE	SOLAR GRAY	0.780	0.430			

EXTERIOR LITE - 3/16" MINIMUM TEMPERED GLASS OR LAMINATED AS - 1 GLASS OF SOLAR GRAY GLARE REDUCING TYPE WITH A LIGHT TRANSMISSION FACTOR OF 45% MAXIMUM.

4 TYPICAL CLASSROOM SIDE WALL ELEVATION A3 /3/8"=1'-0"

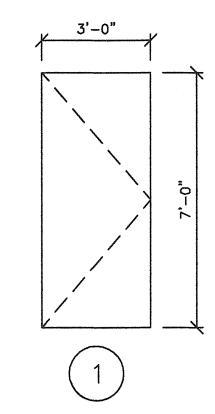

5 DOOR AND DOOR FRAME TYPES

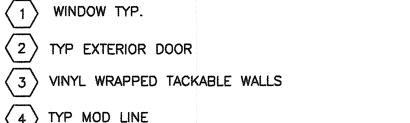

- KEY NOTES -

4 TYP MOD LINE

5 TOP SET BASE

6 TRIM PIECE (FIELD INSTALL)

7 NOT USED

8 ELECTRICAL PANEL

9 (2) 4'x4' MARKER BOARDS

10 HVAC GRILL

(11) CLOCK

PULL STATION J-BOX 48" A.F.F SEE ELECTRICAL SHEETS

13 HORN/STROBE J-BOX SEE ELECTRICAL SHEETS


14 LIGHT SWITCH SEE ELECTRICAL SHEETS

EXIT TACTILE SIGN
PER DETAIL 10/AD (BY OWNER)

(16) THERMOSTAT 48" A.F.F SEE MECHANICAL SHEETS

FIRE EXTINGUISHER TOP OF BRACKET @ +48" AFF PROTRUSION MAX 4" FROM WALL.
IF FIRE EXTINGUISHER IS ABOVE 27" A.F.F.

TYP DUPLEX OUTLET (SEE ELECTRICAL SHEETS)
SPACED @ 12' o.c MIN. PER C.E.C

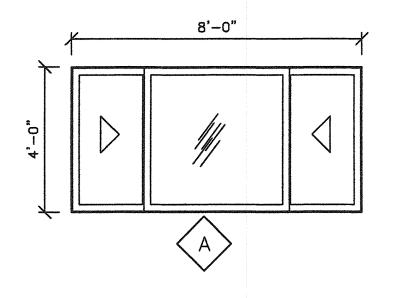

6 \WINDOW TYPES

BASED ON PC# 02-109695

REVISIONS NO DATE DESCRIPTION


DATE: 08/13/09 SCALE: NOTED DRAWN BY: RS SERIAL NO .:


CUSTOMER:


BAKERSFIELD CITY SCHOOLS MUNSEY AND FREMONT ELEMENTARY SCHOOL

2:12 PITCHED ROOF 24' x 40' RELOCATABLE BUILDINGS TYPICAL INTERIOR ELEVATIONS



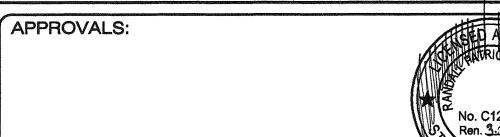

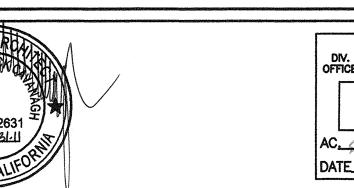



PROJECT No. **A3**