ROOM FINISH MATERIALS SCHEDULE

UNIT	ROOM NUMBER	ROOM NAME	CEILING HEIGHT	FLOOR MATERIAL	FLOOR APPLIED TO	FLOOR FINISH	BASE MATERIAL	BASE FINISH	WAINSCOT MATERIAL	WAINSCOT APPLIED TO	WAINSCOT FINISH	WAINSCOT HT.	WALL MATERIAL	WALL APPLIED TO	WALL FINISH	CEILING MATERIAL	CEILING APPLIED TO	CEILING FINISH	TRIM MATERIAL	TRIM FINISH	REMARKS
A	1,2,3,6,7	CLASS ROOMS	VARIES	RESILIENT TILE	CONCRETE	RESILIENT TILE	RESILIENT BASE	RUBBER COVE					PLASTER	CONCRETE	PAINT	ACOUSTIC TILE	CONCRETE	ACOUSTIC TILE			
	4	GIRLS TOILET	11'-5	CERAMIC TILE		CERAMIC TILE							CERAMIC TILE								
	5	BOYS TOILET	"	CERAMIC TILE		CERAMIC TILE							CERAMIC TILE								
	8	ATHLETIC SUPPLY	10'-0"	CONCRETE		PAINT															
	9	STORAGE	"	CONCRETE		PAINT															
B	1,2,3,6,7	CLASS ROOMS	VARIES	RESILIENT TILE	CONCRETE	RESILIENT TILE	RESILIENT BASE	RUBBER COVE					PLASTER	CONCRETE	PAINT	ACOUSTIC TILE	CONCRETE	ACOUSTIC TILE			
	4	MECHANICAL RM	11'-5	CONCRETE		PAINT															
	5	JANITOR	"	CONCRETE		PAINT															
	3	SPECIAL TRAINING	VARIES	RESILIENT TILE	CONCRETE	RESILIENT TILE	RESILIENT BASE	RUBBER COVE					PLASTER	CONCRETE	PAINT	ACOUSTIC TILE	CONCRETE	ACOUSTIC TILE			
C	1	DISH WASHING		CERAMIC TILE		CERAMIC TILE							CERAMIC TILE								REMOVE EXISTING CONC. FLOOR
	2	SERVING		CERAMIC TILE		CERAMIC TILE							CERAMIC TILE								
	3	KITCHEN		CERAMIC TILE		CERAMIC TILE							CERAMIC TILE								
	4	UTILITY	8'-0"	CONCRETE		PAINT															
	5	HEATER ROOM	12'-2"	CONCRETE		PAINT															
	6	WALK-IN BOX	8'-0	SEE DETAIL																	REMOVE EXISTING WOOD FLOOR
	7	STORAGE	8'	CONCRETE		PAINT															
	8	CONFERENCE RM.	12' 2"	CARPET			RESILIENT BASE	RUBBER COVE					PLASTER	CONCRETE	PAINT	ACOUSTIC TILE	CONCRETE	ACOUSTIC TILE			
	9	TEACHERS LOUNGE	"	CARPET			RESILIENT BASE	RUBBER COVE					PLASTER	CONCRETE	PAINT	ACOUSTIC TILE	CONCRETE	ACOUSTIC TILE			
	10	JANITOR	"	CONCRETE		PAINT															
	11	WOMEN	8'-0"	CERAMIC TILE		CERAMIC TILE							CERAMIC TILE								
	12	MEN	"	CERAMIC TILE		CERAMIC TILE							CERAMIC TILE								
		OPEN CORRIDORS	VARIES	CONCRETE		PAINT															

PROTECTIVE COATING AND/OR PAINT SCHEDULE

UNIT	ROOM NUMBER	BASE	PANS & MILLWORK	WAINSCOT	WALLS			CEILING		TRIM		CASEWORK		DOORS INCL. SIDE & EDGES
A	1,2,3,6,7					15			6		13			6
	4					11		10						9
	5					11		10						9
	8					10		10	6					6
	9					10		10	6					6
B	1,2,3,6,7					13			6		13			6
	4					10		10	6					6
	5					10		10	6					6
	3					3			6		13			6
C	1					11			7					9
	2					10			6					8
	3					10			6					8
	4					10		10	7					9
	5					10		10	7		8			9
	6					11								
	7					10		10	7		8			9
	8					10			6					6
	9					10					15			8
	10					10		10	7					9
	11					11		10						
	12					11		10						9

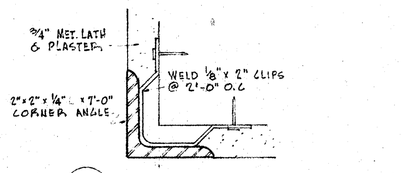

1 CORNER ANGLE DETAIL
HALF FULL SCALE



2 EXPANSION SCREED DETAIL
HALF FULL SCALE

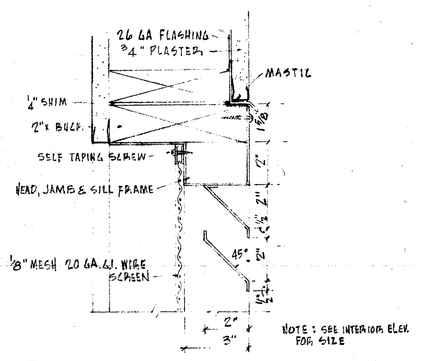

3 LOUVRE DETAIL SCALE: 1½ SIZE

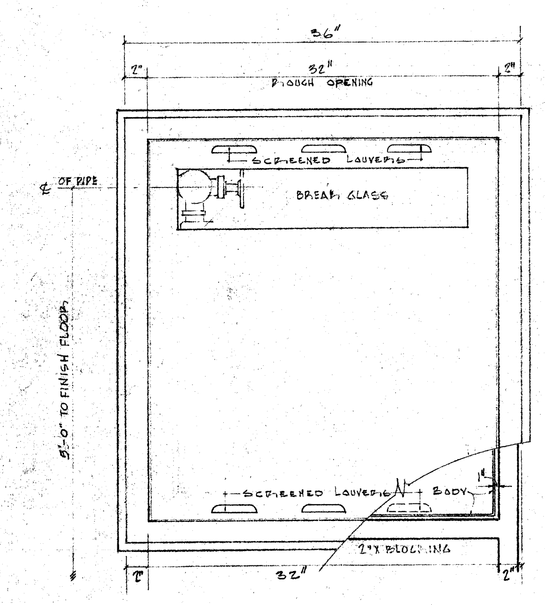

ELEVATION

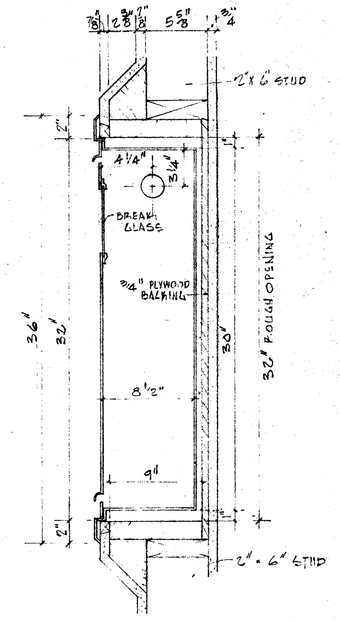

SECTION

4 DETAILS OF FIRE HOSE CABINET FOR 75' HOSE, RACK, AND FIRE EXTINGUISHER SCALE 1½"=1'-0"

ROOM FINISH SCHEDULE & DETAILS

OFFICE OF SUPERINTENDENT OF SCHOOLS
APPROVED
DATE

STATE OF CALIFORNIA
DEPARTMENT OF PUBLIC WORKS
DIVISION OF ARCHITECTURE

STATE FOLLOW-UP DEPARTMENT OF PUBLIC WORKS DIVISION OF ARCHITECTURE
APPLICATION NO. 11363
APPROVED NOV 7 1953
DISTRICT INSPECTOR — STRUCTURAL ENGINEER

BAKERSFIELD CITY SCHOOLS
1600 I ST. BAKERSFIELD CALIF.
BOARD OF EDUCATION

APPROVED
DATE Nov 12 '53

ADDITIONS & ALTERATIONS TO
HORACE MANN ELEM. SCHOOL
2710 NILES STREET
BAKERSFIELD CALIFORNIA

Ernest L. McCoy
ERNEST L. McCOY A.I.A. ARCHITECT
2811 H STREET
BAKERSFIELD
PHONE 4-9851
CALIFORNIA

JOB No. 53-19
DATE 11-20-53
DRAWN
CHECKED

12 OF 12 SHEETS