

DOOR SCHEDULE

DOORS				FRAMES				NOTE NO.
DOOR NO.	FRAME OPENING SIZE	MATERIAL	TYPE	FIRE PROTECTION RATING	HARDWARE SET NO.	MATERIAL	HEAD DETAIL	
1	6'-0" X 6'-8"	HM	A		1	HM	1/2" x 2" x 1/2"	5-1/8"

DOOR NOTES

- NOTES:**
- DOOR HANDLES FOR LOCKSETS TO BE CENTERED @ 36" AFF. & DEADBOLTS @ 44" AFF.
 - EXIT DOORS SHALL BE OPENABLE WITHOUT THE USE OF A KEY OR ANY SPECIAL KNOWLEDGE OR EFFORT. LEVERS TO RETURN TO WITHIN 1/2" OF DOOR.
 - ALL DOORS SHALL BE 1-3/4" THICK, U.N.O.
 - DOUBLE LETTERS IN SCHEDULE, INDICATES A PAIR OF DOORS.
 - SAFETY GLASS, CLEAR.
 - WIRE GLASS
 - UNDERCUT DOOR
 - FIXED LOUVER
 - FUSIBLE LINK LOUVER
 - VISION PANEL
11. CLOSURE SHALL BE SET FOR MAX. OPENING PRESSURE OF 0.5 LBS. @ EXTR. DR. @ 5.0 LBS. @ INTR. DRS.

ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME OF AREA	FLOOR	BASE	WALLS				CEILING	CEILING HEIGHT	REMARKS
				NORTH	EAST	SOUTH	WEST			
1	BOYS RESTROOM	0	1	T	T	T	T	0	8'-0"	
2	GIRLS RESTROOM	0	1	T	T	T	T	0	8'-0"	
3	STAFF RESTROOM	0	1	T	T	T	T	0	8'-0"	
4	MULTI-PURPOSE	0	1	T	T	T	T	0	8'-0"	

MATERIAL & FINISH KEY

- (A) - CARPET PER STATE OF CALIFORNIA SPEC. COMPLYING WITH GROUP 1, TYPE A OR TYPE B, CLASS 2, DENSITY 4600, DIRECT GLUE DOWN
- (B) - SHEET VINYL FLOOR 1/2" SELF COVE
- (C) - VCT - ARMSTRONG STANDARD OR EXCELON
- (D) - 6" RUBBER INTEGRAL COVE BASE
- (E) - 6" BRIGANTINE OR SANDOVAL
- (F) - 3/32" F.F.P. OVER 1/2" GYP. BD. OR 5/8" MARLITE PLANE SPREAD CLASS 3
- (G) - ACOUSTICAL LAY IN GRID CEILING PANELS (SEE SPECIFICATIONS)
- (H) - 4" BURKE TOP SET BASE
- (J) - 1/2" VINYL TACKBOARD CLASS I OVER 1/8" GYPSUM BOARD BACKING

NOTES

DOOR SPECS. EXTERIOR. FRAME SPECS. (SEE SPEC'S)

DOOR SPECS. INTERIOR. FRAME SPECS. (SEE SPEC'S)

WINDOWS SPECS.

HARDWARE SCHEDULE

HARDWARE PACKAGE #1

- LOCKSET - DIO SCHLAGE
- PD RHODES LEVER
- BUTTS - 1-1/2 PR. HANGER 1274 BB 4-1/2 X 4-1/2 NRP 280 OR EQUAL
- CLOSER - NORTON 1004 OR EQUAL
- THRESHOLD - FEMKO 271A OR EQUAL
- DOOR BOTTOM - FEMKO 216AV OR EQUAL
- WEATHERSTRIP - FEMKO 244AV OR EQUAL

HARDWARE PACKAGE #2 (INTERIOR)

- LOCKSET - DIO (PASSAGE) WITH RHODES LEVER
- BUTTS - 1-1/2 PR. HANGER 1274 BB 4-1/2 X 4-1/2 NRP 280 OR EQUAL

HARDWARE PACKAGE #3 (INTERIOR-OFFICE LOCKABLE)

- LOCKSET - CAL ROYAL LX:00-GRADE 1
- BUTTS - 1/2 PR HANGER 1279 4 1/2 X 4 1/2 280

ABBREVIATIONS


- HM - HOLLOW METAL
- AL - ALUMINUM
- SST - STAINLESS STEEL
- STL - STEEL
- W/F - WINDOW WALL FRAME
- SC - SOLID CORE WOOD
- HC - HOLLOW CORE WOOD
- SCL - SOLID CORE WOOD W/ LAMINATED PLASTIC FACES.

STAFF TOILET (MEN & WOMEN) = A
STUDENT TOILET (BOYS & GIRLS) = A


Recommended Dimensions for Accessibility in Toilet Facilities for Children:

Dimension	A	B	K
Toilet centerline from wall	18"	18"	18"
Toilet seat height	17"-18"	18"	18"-12"
Grate bar height (only)	30"	26", top of seat	35"
Toilet paper in front of toilet	12" min	8" min	8" min
Dispenser in front of toilet	12" min	NA	NA
Dispenser or mirror height	34" min	34" min	34" min
Lavatory/sink top height	34" min	34" min	34" min
Lavatory/sink knee clearance	29" min	29" min	29" min
Urinal lip height	17" min	18" min	22" min
Urinal flush handle height	44" min	38" min	38" min
Drinking fountain submer height	26" min	31" min	31" min
Drinking fountain knee clearance	27" min	24" min	24" min
Drinking fountain handrail height	34"-38"	34"	34"

A = Adult dimensions (age 12 and over)
E = Elementary dimensions
K = Kindergarten and Pre-school dimensions
* = Above seat
** = Devices from code requirements and requires a written finding of unreasonable hardship

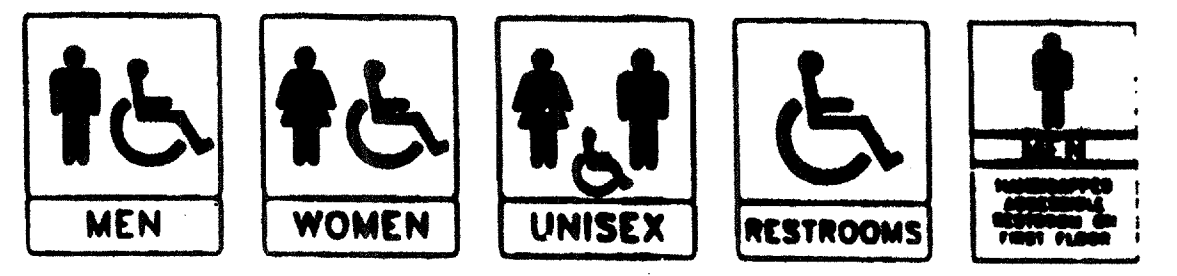

WALL-SIGNAGE (TYP.)

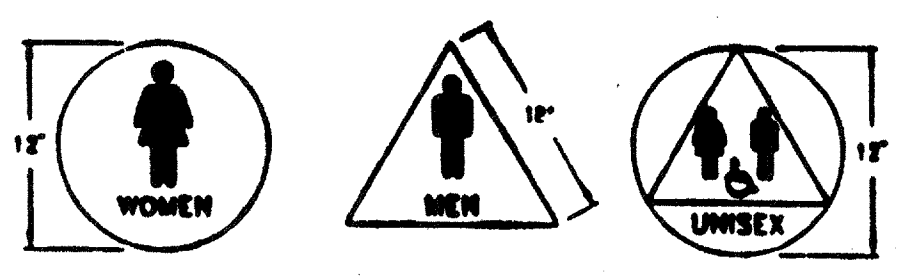

DOOR MOUNTED SIGNAGE (TYP.)

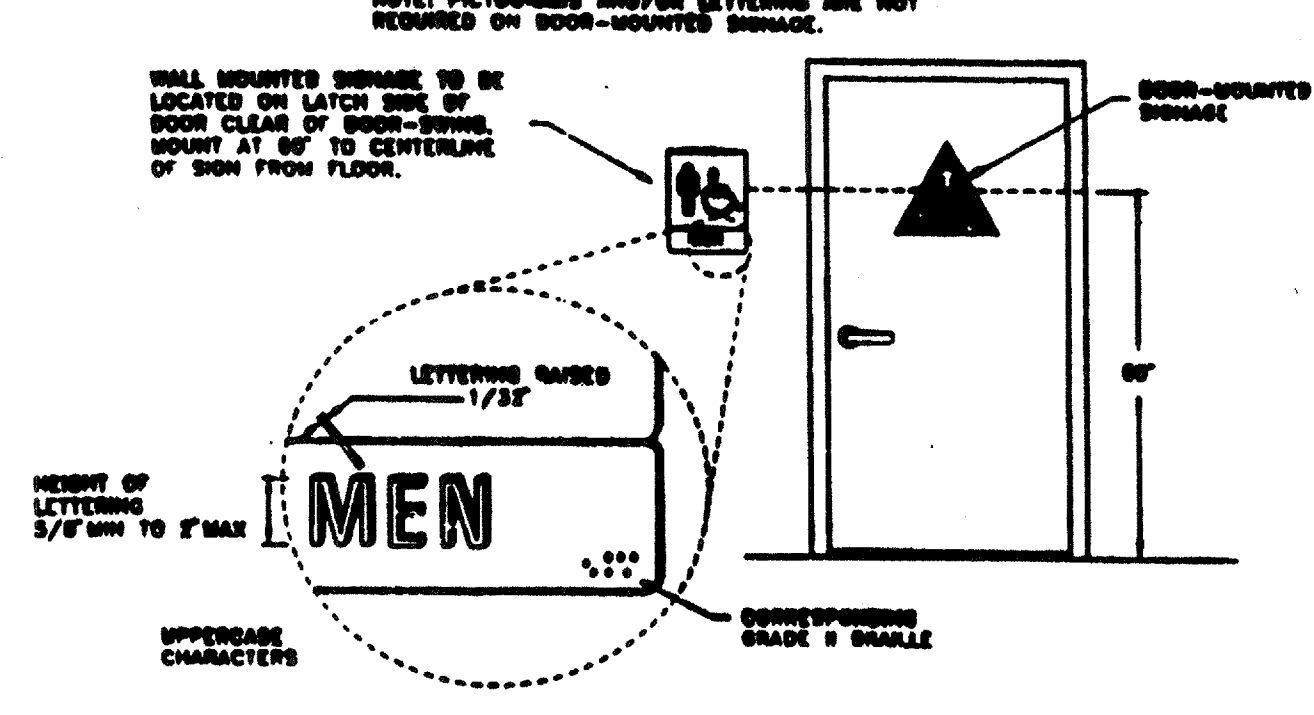


Fig. 78


IDENTIFICATION SYMBOLS FOR SANITARY FACILITIES

INTERNATIONAL SYMBOL OF ACCESS (WHEEL CHAIR SYMBOL) REQ'D @ DOOR OR @ STRIKE SIDE ROOM IDENTIFICATION.

NOTE:

ATTACH SIGNS USING THREE (3) WOODSCREWS, COUNTERSUNK AND ADHESIVE SIGN SHALL BE CENTERED ON DOOR AND MOUNTED 60" ABOVE FLOOR. ATTACHMENT OF SIGN SHALL BE FULLY CONCEALED AND TAMPER RESISTANT.

RADIUS CORNERS

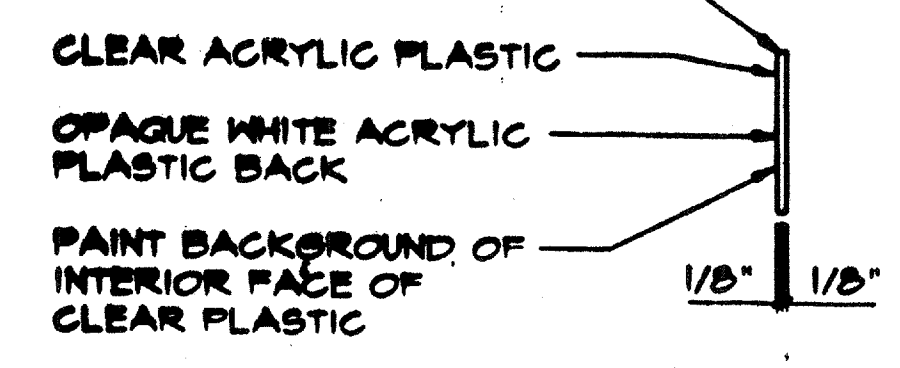

TOILET SIGNAGE

- SYMBOLS SHALL BE CONTRASTING IN COLOR FROM THE DOOR.
- 1/4" THICK, 12" DIAMETER CIRCLE FOR BOTH WOMEN/UNISEX
- 1/4" THICK, 12" SIDES EQUILATERAL TRIANGLE FOR MEN



NOTES:

SUB-FLOOR PREP:
PREPARATION FOR SUB FLOOR TO ACCEPT FINISH FLOORING IS BY FLOORING CONTRACTOR. PLYWOOD SUB FLOOR IS 2.4" PLYWOOD, OUTER PLY IS PLYWOOD AND TOUCHED SANDING. ANY DEFORMITIES DUE TO STANDARD CONSTRUCTION PRACTICES SHALL BE FILLED AND SANDED BY FLOORING CONTRACTOR. THE JOINT AT THE MODULE JOINING SHALL NOT BE LARGER THAN 1/8" AND SHALL BE FILLED AND SANDED BY FLOORING CONTRACTOR.

ALL FINISH SHALL COMPLY W/ C.B.C. CHAPTERS 3, 6, 7, 8 & 10.



(TYP.)

- @ DR PARTITION DOORS
- DOOR PULLS EA. SIDE.
- SLIDE BOLT TYPE LATCH } 30"-44"
- COAT HOOKS @ 48" AFF.

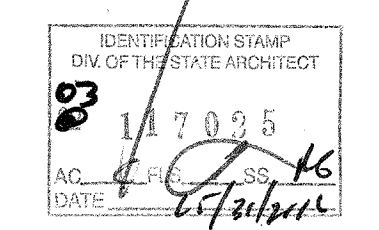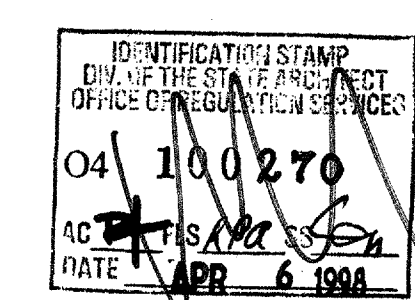

5/11/98

ARCHITECT	ELECTRICAL	STRUCTURAL	MECHANICAL	FIRE MARSHAL	ACCESS COMPLIANCE	STRUCTURAL SAFETY
-----------	------------	------------	------------	--------------	-------------------	-------------------

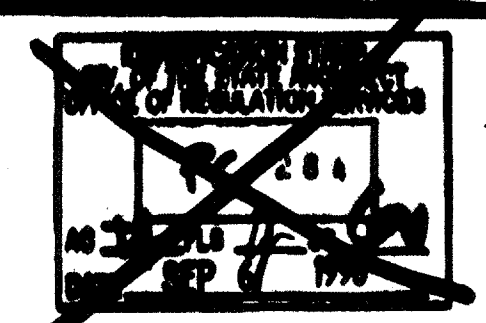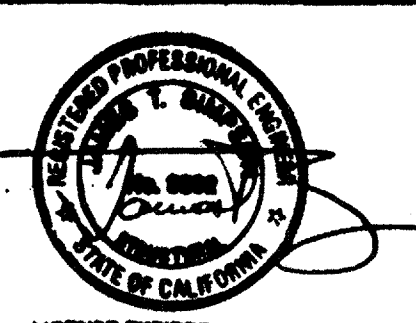

JOB # 2724 # 2818-C
ANAHEIM U.H.S.D. (CLASS LEASING)

MODTECH INC. 1995
4012-081
CLLS.036

DRAWN BY R.S.
DATE
CHECKED BY
DATE

FINISH SCHEDULE A4.0