BAKERSFIELD CITY SCHOOL DISTRICT

CHIPMAN JR. HIGH SCHOOL RELOCATABLES (2)

2905 EISSLER ST
BAKERSFIELD, CA 93306

CONSTRUCTION DOCUMENTS

DSA FILE NO.:15-6 **DSA APP NO.:** **AGENCY TRACKING NO.: 63321-154**

ABBREVIATIONS

A	- ACCESSIBLE	MECH	- MECHANICAL
AC	- ASPHALT CONCRETE	MFG	- MANUFACTURING
A/C	- AIR CONDITIONING	MFR	- MANUFACTURER
ACOUS	- ACOUSTICAL	MIN	- MINIMUM
ADD	- ADDENDUM	MIR	- MIRROR
ADJ	- ADJUSTABLE or ADJACENT	MISC	- MISCELLANEOUS
		MTL	- METAL
ALUM	- ALUMINUM	(N)	- NEW
ARCH	- ARCHITECT (URAL)	NIC	- NOT IN CONTRACT
BD	- BOARD	NO	- NUMBER
BLDG	- BUILDING	NTS	- NOT TO SCALE
BLKG	- BLOCKING	O/	- OVER
BM	- BEAM	OC	- ON CENTER
BOT	- BOTTOM	OD	- OUTSIDE DIAMETER
BUR	- BUILT UP ROOFING	OPP	- OPPOSITE
C	- CARPET	PL	- PROPERTY LINE
CAB	- CABINET	PLAM	- PLASTIC LAMINATE
CB	- CATCH BASIN	PLAS	- PLASTER
CEM	- CEMENT	PLT	- PLATE
CF	- CUBIC FOOT	PLWD	- PLYWOOD
CJ	- CONTROL JOINT	PNL	- PANEL
CLG	- CEILING	POC	- POINT OF CONNECTION
CT	- CERAMIC MOSAIC (TILE)	PTDF	- PRESERVATIVE TREATED DOUGLAS FIR
CMU	- CONCRETE MASONRY UNIT	PTN	- PARTITION
CO	- CLEAN OUT	PVC	- POLYVINYL CHLORIDE
COL	- COLUMN	R	- RISER
CONC	- CONCRETE	RD	- ROOF DRAIN
CONT	- CONTINUOUS or CONTINUE	REF	- REFERENCE
		REFR	- REFRIGERATOR
CONST	- CONSTRUCTION	REQ'D	- REQUIRED
CSK	- COUNTERSINK	RES	- RESILIENT
CW	- COLD WATER	RDWD	- REDWOOD
DET	- DETAIL	RWL	- RAIN WATER LEADER
DF	- DRINKING FOUNTAIN	SCH	- SCHEDULE
DIA	- DIAMETER	SD	- STORM DRAIN
DIAG	- DIAGONAL	SEC	- SECTION
DIM	- DIMENSION	SF	- SQUARE FEET
DIV	- DIVISION	SHT	- SHEET
DR	- DOOR	SHTG	- SHEATHING
DS	- DOWNSPOUT	SIM	- SIMILAR
DWG	- DRAWING	SPEC	- SPECIFICATIONS
E	- ENAMEL	SQ	- SQUARE
(E)	- EXISTING	SS	- STAINLESS STEEL
EA	- EACH	STN	- STAIN
EJ	- EXPANSION JOINT	STD	- STANDARD
ELEV	- ELEVATION	STL	- STEEL
ELECT	- ELECTRICAL	TEMP	- TEMPERED
EQ	- EQUAL	T&G	- TONGUE-AND-GROOVE
EXT	- EXTERIOR	THRU	- THROUGH
(F)	- FUTURE	TJ	- TOOL JOINT
FAB	- FABRICATION	TOC	- TOP OF CURB, CRICKET, or CONCRETE
FAC	- FACTORY		
FD	- FLOOR DRAIN	TOP	- TOP OF PARAPET
FF	- FINISHED FLOOR	TOS	- TOP OF SLAB, SHEATHING, or STEEL
FIN	- FINISH		
FND	- FOUNDATION	TS	- TOP OF SHEATHING
FOF	- FACE OF FINISH	TV	- TELEVISION
FOP	- FACE OF PLYWOOD SHEATHING	TYP	- TYPICAL
		UON	- UNLESS OTHERWISE NOTED
FOS	- FACE OF STUD		
FRP	- FIBERGLASS REINFORCED PLASTIC PANELS	VAR	- VARIES
		VCT	- VINYL COMPOSITION TILE
FTG	- FOOTING	VCTB	- VINYL COVERED TACKBOARD
FURR	- FIRRED (ING)		
GA	- GAUGE	VFY	- VERIFY
GB	- GYPSUM BOARD	VIF	- VERIFY IN FIELD
GL	- GLASS or GLAZING	VWC	- VINYL WALL COVERING
GLV	- GALVANIZED	W/	- WITH
GSM	- GALVANIZED SHEET METAL	WD	- WOOD
		WF	- WIDE FLANGE
GYP	- GYPSUM	WIN	- WINDOW
HB	- HOSE BIBB	W/O	- WITH OUT
HC	- HOLLOW CORE	WS	- WOOD SCREW
HDW	- HARDWOOD	WSCT	- WAINSCOT
HM	- HOLLOW METAL (STEEL)	@	- AT
HOR	- HORIZONTAL	ø	- DIAMETER
HT	- HEIGHT	±	- PLUS/MINUS
HVAC	- HEATING VENTILATING AIR CONDITIONING	°	- DEGREES
HW	- HOT WATER		
ID	- INSIDE DIAMETER		
INSUL	- INSULATE (D), (ION)		
INT	- INTERIOR		
INV	- INVERT		
JT	- JOINT		
LAM	- LAMINATE (D)		
LAV	- LAVATORY		
MATL	- MATERIAL		
MAX	- MAXIMUM		
MB	- MACHINE BOLT		

SYMBOL LEGEND

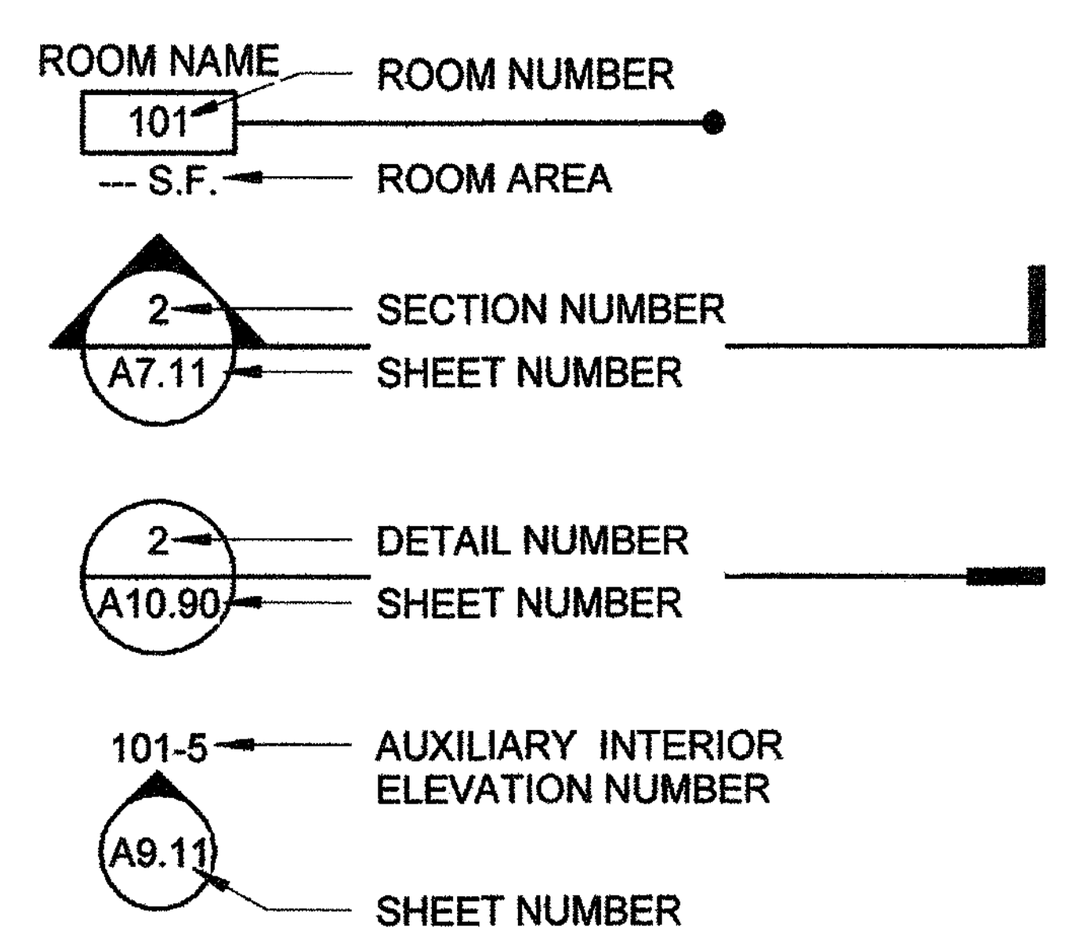

DSA ADMIN. REQUIREMENTS

1. A COPY OF PARTS 1 TO 5, TITLE 24, C.C.R. SHALL BE KEPT ON THE JOB SITE AT ALL TIMES.
2. ALL CONSTRUCTION CHANGE DIRECTIVES - C.C.D. (CHANGE ORDERS) - AND ADDENDA TO BE SIGNED BY ARCHITECT AND THE OWNER AND APPROVED BY DSA. CONSTRUCTION CHANGE DIRECTIVES - C.C.D. (CHANGE ORDERS) -AND ADDENDA ARE NOT VALID UNTIL APPROVED BY DSA PER SECTION 4-338, PART 1, TITLE 24.
3. NO CHANGES OR REVISIONS SHALL BE MADE FOLLOWING WRITTEN APPROVAL WHICH AFFECTS ACCESS COMPLIANCE ITEMS UNLESS SUCH CHANGES OR REVISIONS ARE SUBMITTED TO THE DSA FOR APPROVAL.
4. SUBSTITUTIONS AFFECTING DSA REGULATED ITEMS SHALL BE SUBMITTED AS A CONSTRUCTION CHANGE DOCUMENT OR ADDENDA, AND SHALL BE APPROVED BY DSA PRIOR TO FABRICATION AND INSTALLATION.
5. CONSTRUCTION CHANGE DOCUMENTS MUST BE SIGNED BY THE FOLLOWINGS:
   · ARCHITECT OR ENGINEER OF RECORD.
   · STRUCTURAL ENGINEER (WHEN APPLICABLE)
   · DELEGATED PROFESSIONAL ENGINEER.
   · DSA
6. MATERIALS AND THEIR INSTALLATION SHALL COMPLY WITH APPLICABLE CODES, STANDARDS AND MANUFACTURER'S RECOMMENDATIONS.
7. PER CBC 11B-104.1 "ALL DIMENSIONS ARE SUBJECT TO CONVENTIONAL INDUSTRY TOLERANCES EXCEPT WHERE THE REQUIREMENT IS STATED AS A RANGE WITH SPECIFIC MINIMUM AND MAXIMUM END POINTS."
8. ALL TESTS TO CONFORM TO THE REQUIREMENTS OF SECTION 4-335, PART 1, TITLE 24, AND APPROVED TESTS AND INSPECTIONS SHEET.
9. TESTS OF MATERIALS SHALL AND TESTING LABORATORY SHALL BE IN ACCORDANCE WITH SECTION 4-335, PART 1, TITLE 24 AND THE DISTRICT SHALL EMPLOY AND PAY THE LABORATORY. COSTS OF RE-TEST SHALL BE PER GENERAL CONDITIONS.
10. DSA SHALL BE NOTIFIED AT THE START OF CONSTRUCTION AND PRIOR TOTHE PLACEMENT OF CONCRETE PER SECTION 4-331, PART 1,TITLE 24.
11. INSPECTOR SHALL BE APPROVED BY DSA. INSPECTION SHALL BE IN ACCORDANCE WITH SECTION 4-333(b). THE DUTY OF THE INSPECTOR SHALL BE IN ACCORDANCE WITH SECTION 4-342, PART 1, TITLE 24.
12. SUPERVISION OF CONSTRUCTION BY DSA SHALL BE IN ACCORDANCE WITH SECTION 4-334, PART 1, TITLE 24.
13. CONTRACTOR, INSPECTOR, ARCHITECT, AND ENGINEERS SHALL SUBMIT VERIFIED REPORTS (Form SSS-6) IN ACCORDANCE WITH SECTIONS 4-336 AND 4-343, PART 1, TITLE 24.
14. THE ARCHITECT AND THE STRUCTURAL ENGINEER SHALL PERFORM THEIR DUTIES IN ACCORDANCE WITH SECTIONS 4-333(a) AND 4-341, PART 1, TITLE 24.
15. THE CONTRACTOR SHALL PERFORM HIS DUTIES IN ACCORDANCE WITH SECTIONS 4-343, PART 1, TITLE 24.
16. THE INTENT OF THESE DRAWINGS AND SPECIFICATIONS IS THAT THE WORK OF ALTERATION, REHABILITATION OR RECONSTRUCTION IS TO BE IN ACCORDANCE WITH TITLE 24, CALIFORNIA CODE OF REGULATIONS. SHOULD ANY EXISTING CONDITIONS SUCH AS DETERIORATION OR NONCOMPLYING CONSTRUCTION BE DISCOVERED WHICH IS NOT COVERED BY THE CONTRACT DOCUMENTS WHERE IN THE FINISHED WORK WILL NOT COMPLY WITH TITLE 24, CALIFORNIA CODE OF REGULATIONS, A CONSTRUCTION CHANGE DIRECTIVES-C.C.D., OR SEPARATE SET OF PLANS AND SPECIFCATIONS, DETAILING AND SPECIFYING THE REQUIRED WORK SHALL BE SUBMITTED TO AND APPROVED BY DSA BEFORE PROCEEDING WITH THE WORK.

GENERAL NOTES

1. ALL WORK SHALL BE IN ACCORDANCE WITH THE CALIFORNIA CODE OF REGULATIONS (TITLE DOCUMENTS) AND ALL OTHER LOCAL CODES AND ORDINANCES OF THE GOVERNING AUTHORITY HAVING JURISDICTION AND AS IDENTIFIED UNDER APPLICABLE CODES ON THIS SHEET. IT IS THE INTENT OF THESE DOCUMENTS TO COMPLY HERETO.
2. ALL DRAWINGS SHALL BE USED IN CONCERT WITH EACH OTHER. IF THE CONTRACTOR DISCOVERS ANY DISCREPANCY BETWEEN THE DOCUMENTS, THE CONTRACTOR SHALL REQUEST IN WRITING A CLARIFICATION FROM THE ARCHITECT. REFER TO THE ARCHITECTURAL AND ENGINEERING DRAWINGS FOR PLACEMENT, ORIENTATION AND COORDINATION OF WORK. INFORMATION SHOWN IN LARGER SCALE IS INTENDED TO SUPPLEMENT INFORMATION OF SMALLER, PRECEDING REFERENCE DRAWINGS. LARGER SCALE DRAWINGS TAKE PRECEDENCE OVER SMALLER SCALE DRAWINGS.
3. NOTATIONS MARKED "TYPICAL" (TYP.) SHALL BE CONSISTENT THROUGHOUT ALL SUCH REFERENCE NOMENCLATURE, SYMBOLS AND DRAWING INDICATIONS OF LIKE OR SIMILAR KIND.
4. DO NOT SCALE DRAWINGS. THE CONTRACTOR SHALL FIELD VERIFY CONSTRUCTION CONDITIONS AND DIMENSIONS PRIOR TO ORDERING, FABRICATING OR INSTALLING ANY ASSOCIATED WORK. IF DISCREPANCIES ARE FOUND, THE CONTRACTOR SHALL REQUEST IN WRITING A CLARIFICATION FROM THE ARCHITECT PRIOR TO COMMENCEMENT OF ANY ASSOCIATED WORK.
5. CONTRACTOR SHALL VERIFY, AT THE SITE, ALL EXISTING CONDITIONS PRIOR TO SUBMITTAL OF BIDS. SITE VISITS DURING BIDDING SHALL BE COORDINATED WITH THE OWNER IN ACCORDANCE WITH THE PROVISIONS OF THE SPECIFICATIONS.
6. CONTRACTOR SHALL PROTECT ALL EXISTING WORK. ANY DAMAGED WORK SHALL BE REPLACED WITH THE SAME MATERIALS, INCLUDING MATCHING THE EXISTING COLORS AND TEXTURES.
7. EXISTING WORK IS SHOWN FOR REFERENCE ONLY. THE OWNER AND/OR ARCHITECT DO NOT GUARANTEE EXISTING CONDITIONS AS SHOWN ON THESE DOCUMENTS.
8. CONTRACTOR(S) SHALL BE RESPONSIBLE FOR THEIR OWN CLEANUP AS WORK PROGRESSES.
9. MATERIALS SUSPECTED OF CONTAINING HAZARDOUS MATERIALS THAT ARE DISCOVERED DURING THE PROGRESS OF THE WORK SHALL BE REPORTED TO THE OWNER IN WRITING. WORK IN THAT PARTICULAR AREA SHALL BE SUSPENDED UNTIL THE OWNER TESTS THE SUSPECT MATERIAL AND IT IS FOUND TO BE SAFE, OR THE MATERIAL HAS BEEN PROPERLY ABATED.
10. ALL WORK IS NEW UNLESS OTHERWISE NOTED.
11. IN THE EVENT CERTAIN FEATURES OF THE CONSTRUCTION ARE NOT FULLY SHOWN ON THE CONSTRUCTION DOCUMENTS, THEN THEIR CONSTRUCTION SHALL BE OF THE SAME CHARACTER AS FOR SIMILAR CONDITIONS THAT ARE SHOWN.
12. STORAGE OF CONSTRUCTION MATERIAL AND EFFECT OF WORK ON EXISTING OCCUPIED AREAS SHALL BE APPROVED BY THE LOCAL FIRE AUTHORITY.
13. CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATION OF ALL WORK PROVIDED BY OTHERS UNDER SEPARATE CONTRACT.
14. KEYNOTES USED ON THE ARCHITECTURAL DRAWINGS ARE FOR ASSEMBLIES, MATERIAL REFERENCES AND NOTES. REFER TO THE KEYNOTE LIST ON THE RESPECTIVE DRAWING FOR THE INFORMATION WHICH RELATES TO EACH KEYNOTE.

SCOPE OF WORK

THE FOLLOWING IS A BRIEF DESCRIPTION OF THE SCOPE OF WORK AS REQUIRED BY DSA. CONTRACTOR SHALL DETERMINE/VERIFY THE ENTIRE SCOPE AS SHOWN ON THE DRAWINGS AND SPECIFICATIONS PRIOR TO SUBMITTING BIDS.

PLACEMEMNT OF TWO (2) 24'-0" x 40'-0" CLASSROOM RELOCATABLE BUILDINGS ONTO AN EXISTING CAMPUS

STATEMENT OF GENERAL CONFORMANCE

FOR ARCHITECTS/ENGINEERS WHO UTILIZE PLANS,
INCLUDING BUT NOT LIMITED TO SHOP DRAWINGS, PREPARED BY OTHER LICENSED DESIGN PROFESSIONALS AND/OR CONSULTANTS.

(Application No. ____________ File No. 15-6)

☒ The MODTECH and MSI drawings or sheets listed on the cover or index sheet
☐ This drawing, page or specifications/calculations

have been prepared by other design professionals or consultants who are licensed and/or authorized to prepare such drawings in this state. It has been examined by me for:

1) design intent and appears to meet the appropriate requirements of Title 24, California Code of Regulations and the project specifications prepared by me,
2) and coordination with my plans and specifications and is acceptable for incorporation into the construction of this project.

The Statement of General Conformance "shall not be construed as relieving me of my rights, duties, and responsibilities under Sections 17302 and 81138 of the Education Code and Sections 4-336, 4-341, and 4-344" of Title 24, Part 1. *(Title 24, Part 1, Section 4-317 (b))*

I find that: ☒ All MODTECH and MSI drawings or sheets listed on the cover or index sheet
☐ This drawings or page

☒ is/are in general conformance with the project design, and
☒ has/have been coordinated with the project plans and specifications

Signature: [signature] Date: 4/27/16
Architect or Engineer designated to be in general responsible charge

RICHARD MELLO
Print Name

C 18079 — License Number
10/2017 — Expiration Date

SHEET INDEX

ARCHITECTURAL

A0.01	TITLE SHEET
A1.10A	SITE PLAN - LOCAL FIRE AUTHORITY REVIEW
A1.10B	FLOOD MAP
A1.11	SITE PLAN
A1.12	PARTIAL SITE PLAN
A1.13	DIMENSION AND ELEVATIONS PLAN
A1.14	EXISTING RESTROOM
A10.10	DETAILS

ELECTRICAL

E-0	SYMBOL LIST, GENERAL NOTES, SINGLE LINE DIAGRAM
E-0.1	DETAILS
E-0.2	FIRE ALARM RISER CALCULATIONS
E-1	ELECTRICAL PARTIAL SITE PLAN
E-2	FIRE ALARM PARTIAL SITE PLAN
E-3	DATA/COMM. PARTIAL SITE PLAN

CLASSROOM RELOCATABLE R-510
MODTECH (A# 04-105455)
SN; 47949-01/02

A.0	TITLE SHEET
A1.1	FLOOR PLAN
A2.04	REFLECTED CEILING PLAN
A2.09	REFLECTED CEILING DETAILS
A3.01	ROOF PLAN 22GA
A3.03	ROOF DETAILS
A4.01	EXTERIOR ELEVATIONS W/ FASCIA
A4.03	ARCHITECTURAL DETAILS
A5.02	INTERIOR ELEVATIONS
A6.02	DOOR, WINDOW, FINISH, HARDWARE SCHEDULES
F1.01	FOUNDATION PLAN.
F2.01	FOUNDATION DETAILS
S1.0	FLOOR FRAMING PLAN
S1.2	FLOOR FRAMING DETAILS
S2.2	ROOF FRAMING DETAILS
S3.0	STRUCTURAL ELEVATIONS AND DETAILS
S4.0	WALL FRAMING
S5.0	WALL FRAMING DETAILS
M1.0	MECHANICAL HVAC PLAN
E1.03	ELECTRICAL PLAN
R1.02	RAMP/LANDING
R5.01	5 FOOT RAMP/LANDING PLAN, 11' RAMP

CLASSROOM RELOCATABLE R5-20
MODULAR STRUCTURES INTERNATIONAL
(A# 04-100118) SN: 4561/62

T	TITLE SHEET
G-1	GENERAL SPECIFICATIONS
G-3	ARCHITECTURAL STANDARDS DETAILS
G-4	PLUMBING GENERAL NOTE AND DETAILS
A-1-24	24'X40' FLOOR PLAN
A-2-24	24'X40' EXTERIOR ELEVATION
A-3-24	24'X40' ROOF PLAN
A-4-24	24'X40' INTERIOR ELEVATION
A-6-24	24'X40' REFLECTED CEILING PLAN & DETAILS
M-1-24	24'X40' MECHANICAL PLAN
E-1-24	24'X40' ELECTRICAL PLAN
S-1	STRUCTURAL GENERAL NOTES
S1-A	STRUCTURAL GENERAL NOTES
S-5A	DOUBLE SLOPE COLD ROLLED/TRUSS RIGID FRAME
S-10	FLOOR FRAMING PLAN
S-11	FLOOR CONSTRUCTION DETAILS
S-20	SINGLE OR DOUBLE ROOF PITCH-EXTERIOR WALLS
S-25	STEEL FRAMING DETAIL
S-26	STEEL FRAMING DETAIL
S-30	GENERAL INT. AND EXT. WALL CONSTRUCTION DETAILS
S-40	GENERAL ROOF CONSTRUCTION LAYOUT
S-50	ROOF CONSTRUCTION DETAILS
S-52	ROOF CONSTRUCTION DETAILS
S-60	ROOF CONSTRUCTION DETAILS
S-62	ROOF CONSTRUCTION DETAILS
S-70	STEEL TRUSS FOR DOUBLE PITCH ROOF (20 PSF)
S-70A	STEEL TRUSS FOR DOUBLE PITCH ROOF (30 PSF)
F-1	WOOD FOUNDATION (50 PSF FLOOR) W/20 PSF ROOF
F1.0	C.L FOUNDATION PLAN AND DETAILS (PC 04-113776)
F2.1	C.L FOUNDATION PLAN AND DETAILS (PC 04-113776)
R-1	RAMP LANDING PLAN AND DETAILS

APPLICABLE CODES

CALIFORNIA CODE OF REGULATIONS, TITLE 24 - BUILDING STANDARDS

- 2013 **CALIFORNIA ADMINISTRATIVE CODE (CAC)** (Title 24, Part 1, CCR) - At Chaper 10, 2010 California Building Standards Administrative Code (Title 24, Part 1) applies
- 2013 **CALIFORNIA BUILDING CODE (CBC)**, Volumes 1 & 2 (Title 24, Part 2CR) (2012 International Building Code with 2013 California amendments)
- 2013 **CALIFORNIA ELECTRICAL CODE,** Title 24, Part 3, CCR) (2011 National Electrical Code with 2013 California amendments)
- 2013 **CALIFORNIA MECHANICAL CODE (CMC)**, Title 24, Part 4, CCR) (2012 Uniform Mechanical Code with 2013 California amendments)
- 2013 **CALIFORNIA PLUMBING CODE (CPC)**, Title 24, Part 5, CCR) (2012 Uniform Plumbing Code with California amendments)
- 2013 **CALIFORNIA ENERGY CODE,** (Title 24, Part 6, CCR)
- 2013 **CALIFORNIA HISTORICAL BUILDING CODE,** (Title 24, Part 8, CCR)
- 2013 **CALIFORNIA FIRE CODE (CFC)**, Title 24, Part 9, CCR) (2012 International Fire Code with California amendments)
- 2013 **CALIFORNIA EXISTING BUILDING CODE,** (Title 24, Part 10, CCR)
- 2013 **CALIFORNIA GREEN BUILDING STANDARDS CODE (CALGREEN),** Title 24, Part 11, CCR) - 2010 California Green Building Standards Code applies at those portions designated by California Building Standards Commision.
- 2013 **CALIFORNIA REFERENCE STANDARDS CODE,** (Title 24, Part 12, CCR)

- 2010 ADA STANDARDS FOR ACCESSIBILITY DESIGN, U.S. Department of Justice
- 2013 NFPA 13, STANDARD FOR THE INSTALLATION OF SPRINKLER SYSTEMS, 2013 Edition
- 2013 NFPA 72, NATIONAL FIRE ALARM CODE AND SIGNALING CODE, 2013 Edition

NOTE: SOME CODES MAY NOT APPLY IF WORK REGULATED BY SUCH CODES IS NOT WITHIN THE SCOPE OF THIS PROJECT.

PROJECT DIRECTORY

OWNER:
BAKERSFIELD CITY SCHOOL DISTRICT
1501 FELIZ DRIVE
BAKERSFIELD, CA 93307
PHONE: (661) 631-4600
FAX: (661) 861-9907
CONTACT: ROBERT VANTASSEL, RANDY ROWLES

ARCHITECT:
IBI GROUP ARCHITECTURE PLANNING
4119 BROAD STREET, SUITE 210
SAN LUIS OBISPO, CA 93401
PHONE: (805) 546-0433
FAX: (805) 546-0504
CONTACT: RICK MELLO, PRINCIPAL

ELECTRICAL:
JMPE
5500 MING AVENUE #251
BAKERSFIELD, CA 93309
PHONE: (661) 831-7851
FAX: (661) 831-7813
CONTACT: JOHN MALONEY

VICINITY MAP

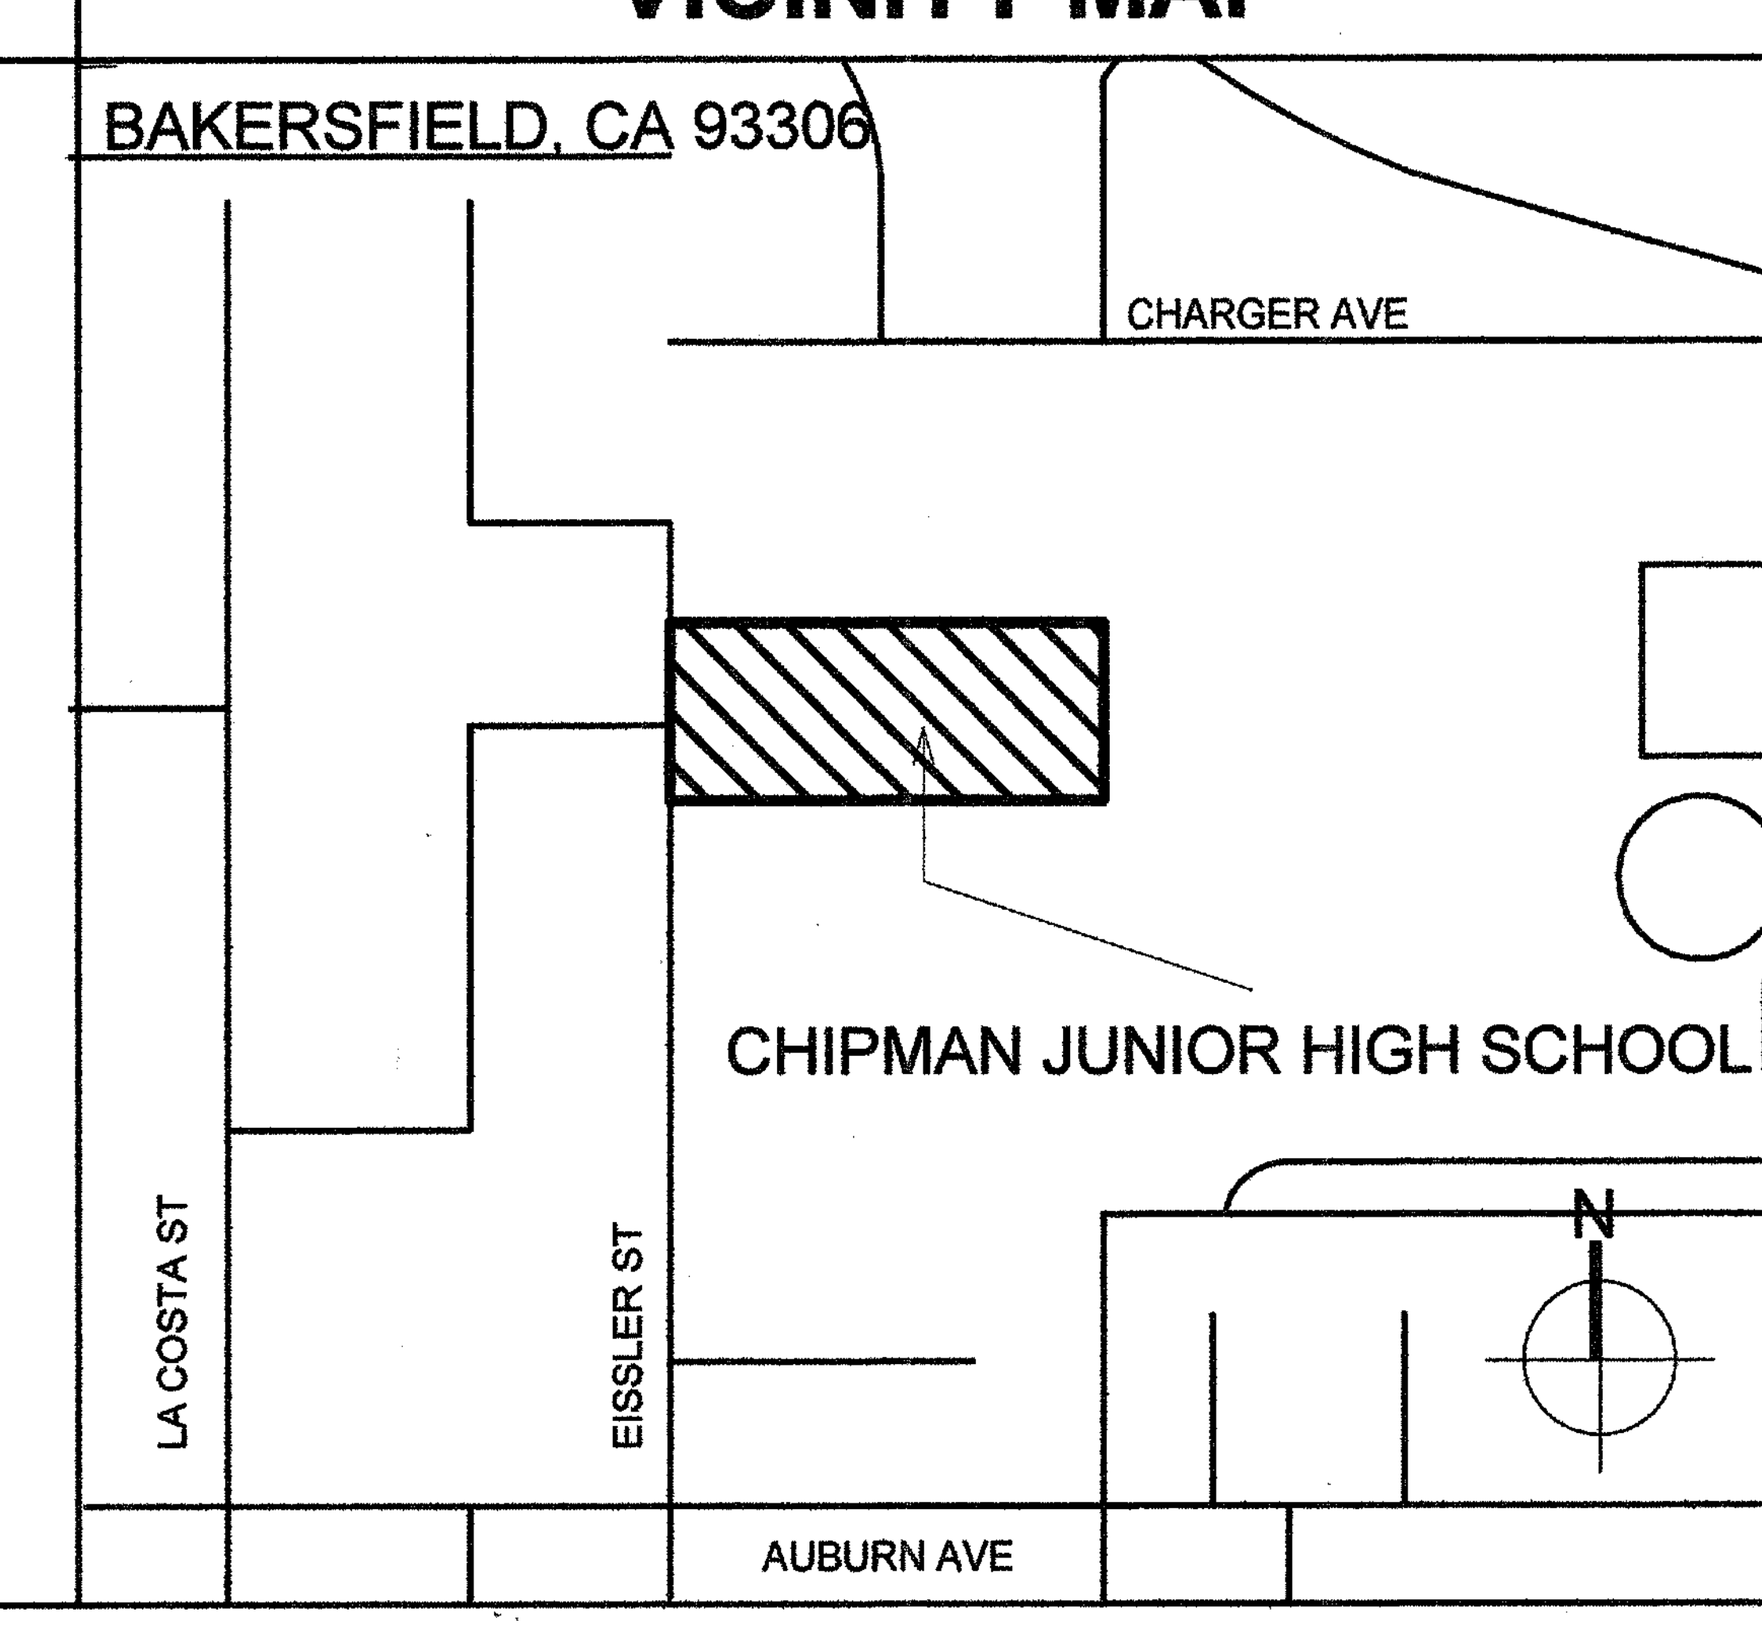

PRIME CONSULTANT

ARCHITECTURE PLANNING
IBI
San Luis Obispo
4119 Broad Street, Suite 210
San Luis Obispo, CA 93401
805.546.0433 fax: 805.546.0504

SEAL

LICENSED ARCHITECT — RICHARD MELLO — No. C18079 — REN. 10/17 — STATE OF CALIFORNIA

COPYRIGHT:
Any reproduction or distribution for any purpose other than authorized by IBI Group is forbidden.

COPYRIGHT 2016 IBI GROUP

REVISIONS

NO.	DATE	APPRD.	DESCRIPTION

CONSULTANT

AGENCY INFORMATION:

AGENCY TRACKING NO. 63321-154
FILE NO. 15-6

IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
OFFICE OF REGULATION SERVICES
03-117035
AC AC FLS Lo SS BY
DATE 6/28/2016

BAKERSFIELD CITY SCHOOL DISTRICT

CHIPMAN JR. HIGH SCHOOL RELOCATABLES (2)

2905 EISSLER ST
BAKERSFIELD, CA 93306

OPSC or OSHPD PROJ. NO:	
PROJECT NO:	14146.000
DRAWN BY:	C.C
CHK'D BY:	RM
ISSUE DATE:	04/27/2016

SHEET TITLE

TITLE SHEET

SHEET NUMBER

A0.01

CONSTRUCTION DOCUMENTS

PLOT DATE: 4/26/2016 1:29:58 PM \\usawest.ibigroup.com\USN\14146_BC_ChipReloc\5.9 Drawings\59arch\current\ATW-14146_site_Chipman.rvt