

FLOOR JOIST TABLE


LIVE LOAD	6 3/8" X 2 1/2" X 12GA	STIFFENED FLOOR bPHBW
90 P.S.F.	48" OC	24" OC

KEY NOTES

- 1) 6 3/8 X 2 1/2 X 12GA FLOOR JOIST @ MIDSPAN OF FLOOR DEFS. TYPICAL
- 2) 5" Ø HAND HOLES AT BOLT PM TO PM @ 12" SPACINGS
- 3) 2" X 1/4" PERimeter CHANNEL (TYPICAL)
- 4) PLYWOOD FLOOR SHEATHING AFA 95 1-83 1 1/8" THICK STURDIE-FLOOR AFA 48" OC SPAN RATING ATTACHED AFA 1 3/4" SELF-TAPPING FLAT HEAD SCREWS AT 6" OC TO PERIMETER FRAME AND AFA 12" X 12" DRIVE PINS AT 6" OC SUPPORTED EDGES AND 6" OC FULL JOIST TYPICAL
- 5) 6 3/8 X 2 1/2 X 12GA FLOOR F.R.M. @ 48" OC
- 6) TYPICAL BOLT HOLE LOCATION (SEE)
- 7) 1/4" Ø HOLE @ MIDSPAN OF CTYPICAL FOR MATERIAL HANDLING

NOTES

1. FOR L/HAND & R/HAND FRAME SEE S1.0

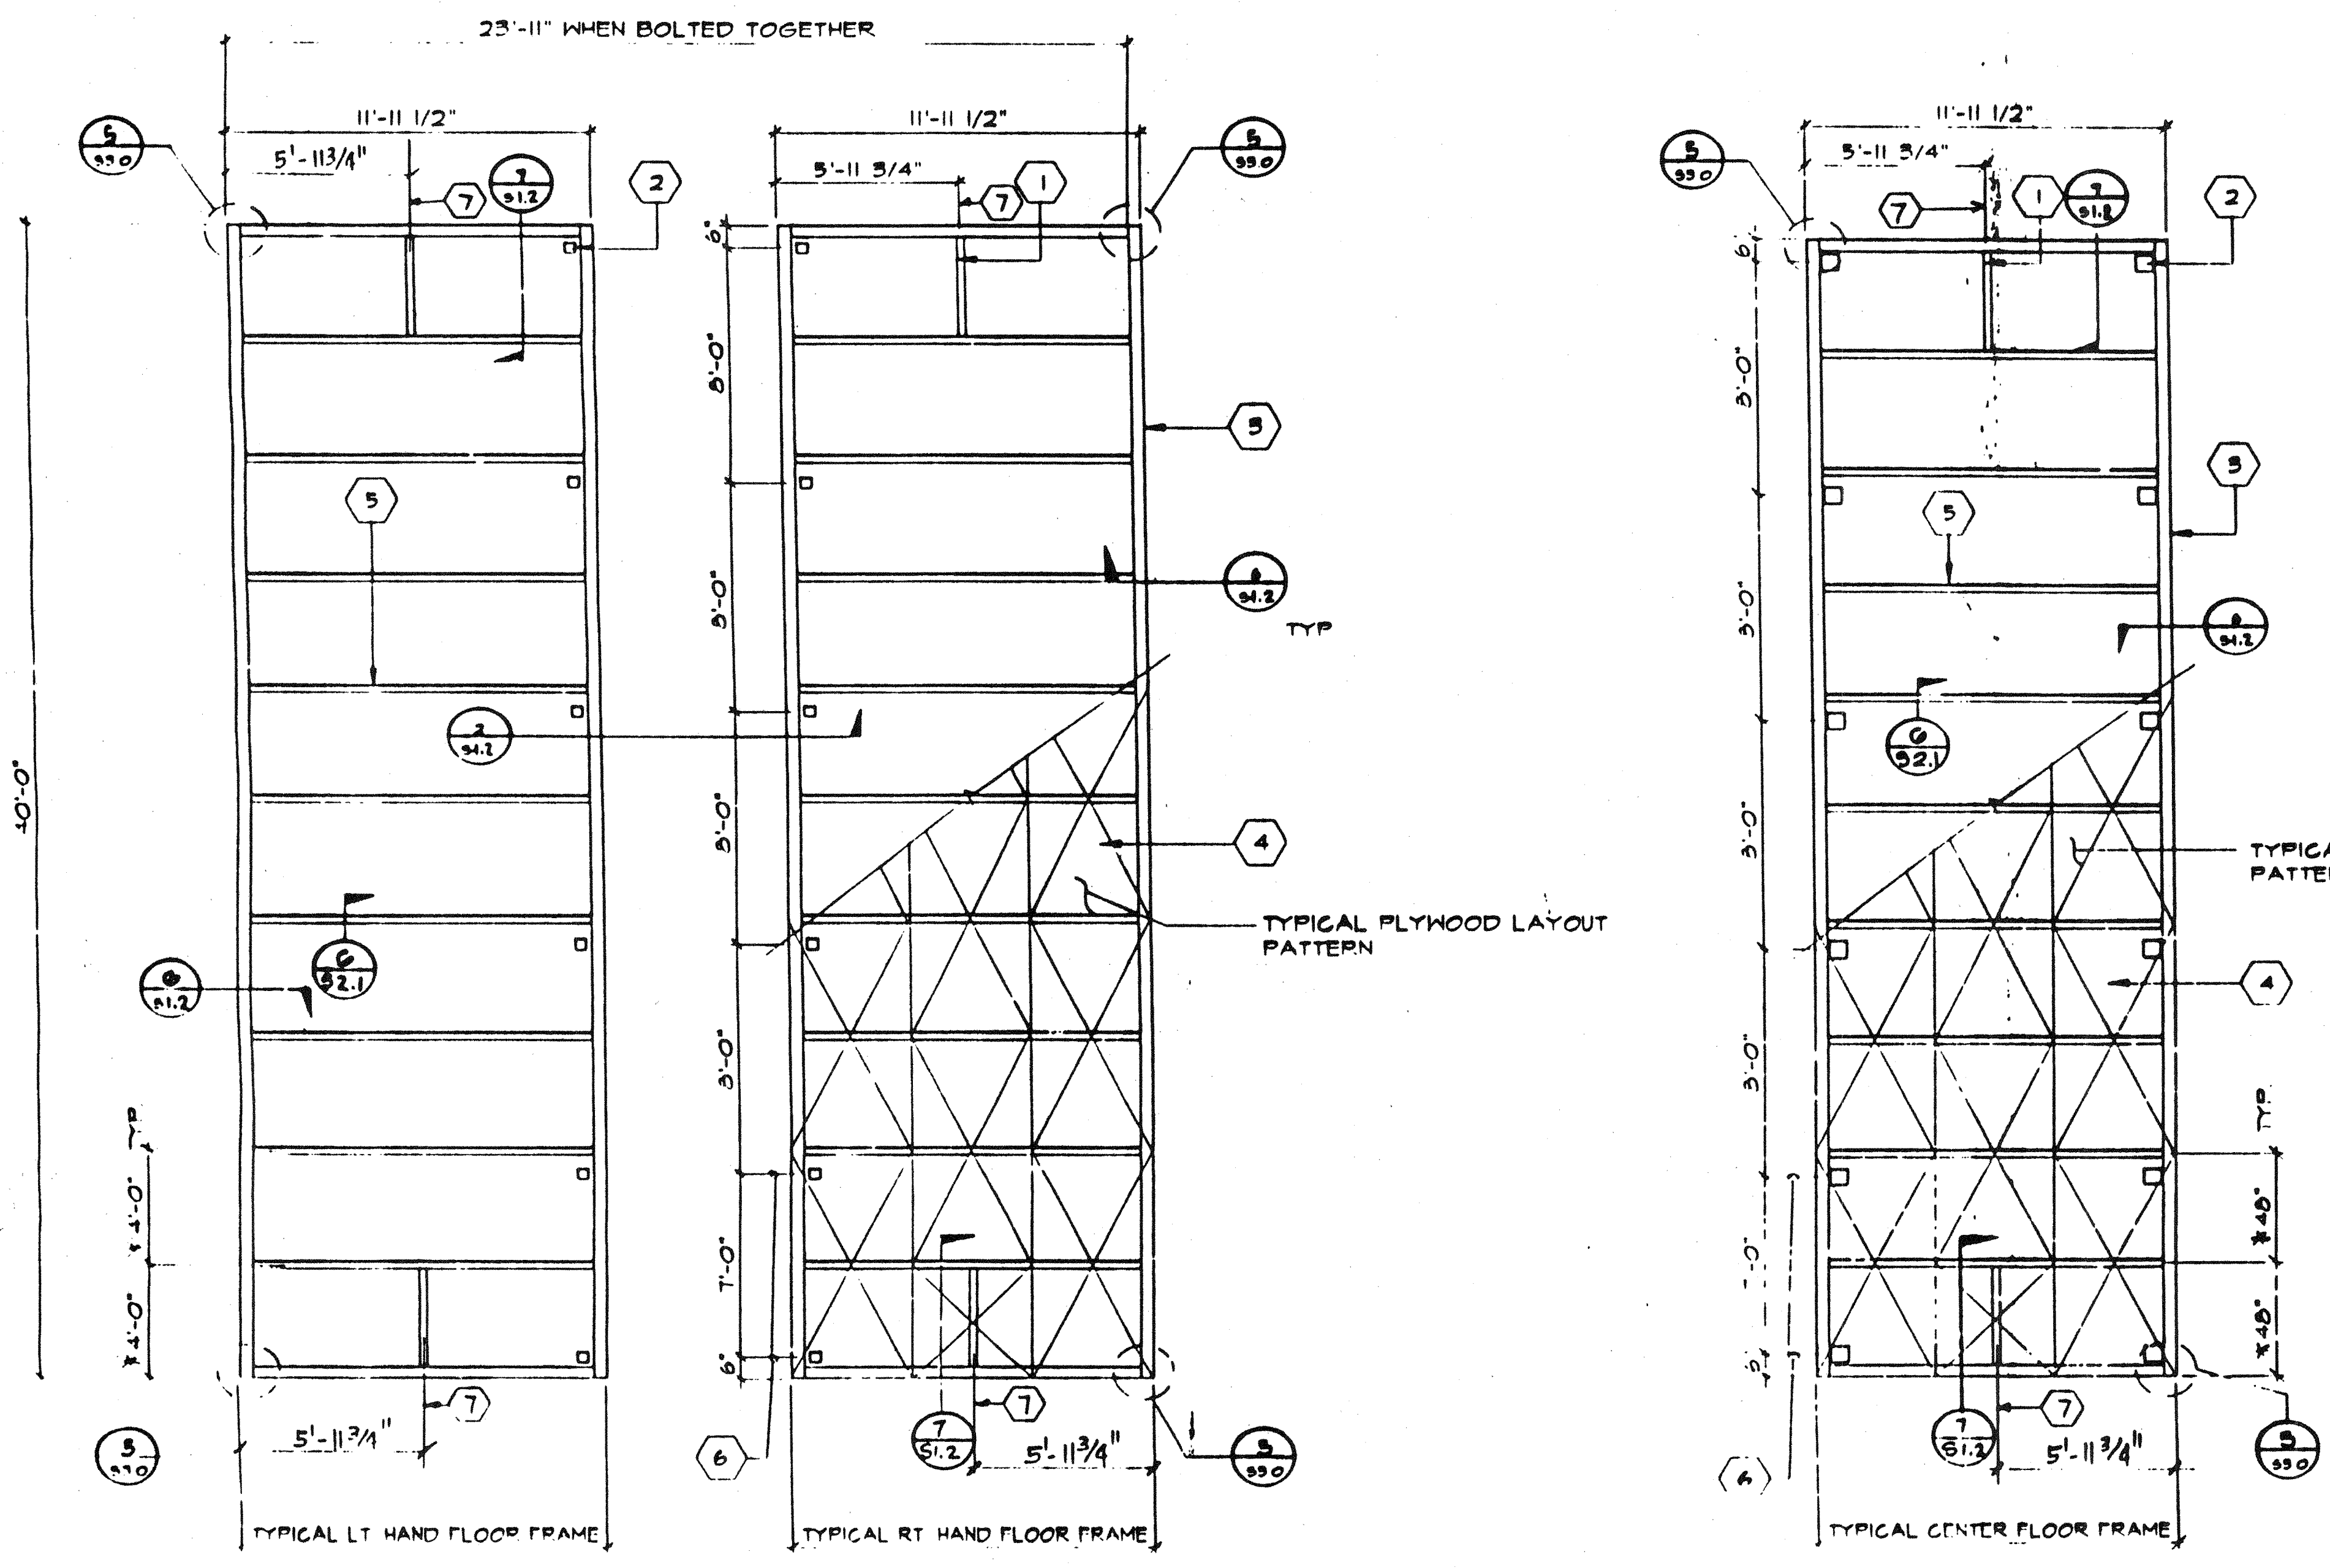

TYPICAL PLYWOOD LAYOUT PATTERN

TYPICAL PLYWOOD LAYOUT PATTERN


TYPICAL CENTER FLOOR FRAME

* REFER TO FLOOR JOIST TABLE FOR CORRECT SPACING FOR PROJECT.

FLOOR FRAMING PLAN

50 PSF FLR LL

SCALE 1/4"=1'-0"

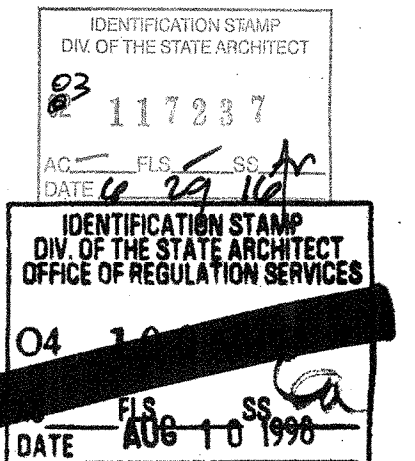

ARCHITECT	ELECTRICAL	STRUCTURAL	MECHANICAL	FIRE MARSHAL	ACCESS COMPLIANCE	STRUCTURAL SAFETY



2926	4012-084
FLOOR FRAMING PLAN	

STKP-39
2867
2926
S1.0