
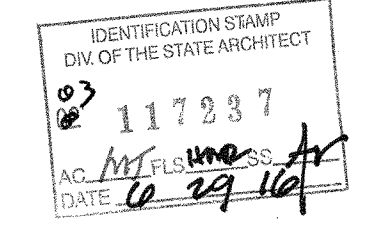


FLOOR PLAN (24' X 40')

SCALE 1/4"=1'-0"

- KEY NOTES**
- 1 ROOF OVERHANG
 - 2 HVAC UNIT - SEE MECH. SHEET
 - 3 2- 8'X4' MARKER BOARDS (SEE SPECS)
 - 4 FINISH FLOORING: (SEE FINISH SCHED.) A5.0
 - 5 TYPICAL INTERIOR FINISH (SEE FINISH SCHEDULE) A5.0
 - 6 FIRE EXTINGUISHER - 5 LBS. DRY CHEMICAL WITH 2A-10BC U.L. RATING ON WALL MTD. BRACKET. HANDLE AT 48" A.F.F.
 - 7 MODLINE (M TYPICAL)
 - 8 LINE OF RAMP/LANDING SEE R1.0 & R2.0

- NOTES**
1. METAL TAG ON ALL MODULES. MECHANICALLY ATTACHED TO REAR EXTERIOR OF BUILDING SHOW D.S.A. APPLICATION NUMBER, MANUFACTURER'S NAME AND SERIAL NUMBER, ROOF & FLOOR DESIGN LIVE LOAD, AND DESIGN WIND LOAD.
 2. INSULATION MATERIALS INSTALLED WITHIN FLOOR-CEILING ASSEMBLIES, ROOF-CEILING ASSEMBLIES, WALLS, CRAWL SPACES, OR ATTICS SHALL HAVE A FLAMESPREAD RATING NOT TO EXCEED 25 AND A SMOKE DENSITY NOT TO EXCEED 450. EXCEPTIONS: 1. FOAM PLASTIC INSULATION SHALL COMPLY WITH SEC. 2602.2. WHEN MATERIALS ARE INSTALLED IN CONCEALED SPACES OF TYPES I, II, IV, AND V CONSTRUCTION, THE FLAME SPREAD AND SMOKE-DEVELOPED LIMITATIONS DO NOT APPLY TO FACINGS IF THE FACING IS INSTALLED IN SUBSTANTIAL CONTACT WITH THE UNEXPOSED SURFACE OF THE CEILING, FLOOR OR WALL FINISH. (SEC. 707.3 CBC.)

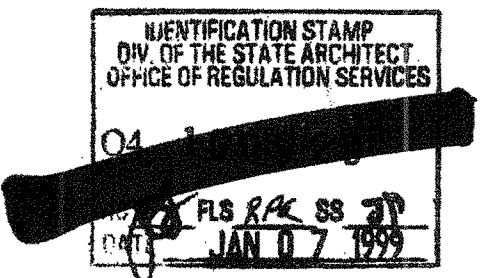

STKP-42
 11/24/98
 2506
 2377
 PROJECT NO.

REVISIONS	Electrical Engineer's Seal	Mechanical Engineer's Seal	Structural Engineer's Seal	Architect's Seal	Division of the State Architect
1					
2					
3					
4					

Electrical Engineer's Seal
 Mechanical Engineer's Seal
 Structural Engineer's Seal

Architect's Seal
 DIVISION OF THE STATE ARCHITECT
 OFFICE OF REGULATION SERVICES
 PC-266
 DATE: JAN 23 1999

MODTECH INC.
 2830 BARRETT AVENUE
 PERRIS, CALIF. 92572
 PH (909) 943-4014
 FAX (909) 940-0427

PROJECT NUMBER: 2986
 © MODTECH, INC. 1997

FLOOR PLAN

drawn by: 4012-088
 checked by: 05 JAN 99
 Modtech project no: 2506
 2377
A1.0