

ROOF FRAMING PLAN

OVERHANG FASCIA, SEE 5/S-2.60

ROOF HEADER, SEE 12/S-2.51

1 16 S-2.51 S-2.51 3 1/2" x 0.060" OR 2 1/4" x 0.105" STRAP CROSS BRACING INSTALLED TAUT WINO SLACK (TYP) ROOF BEAM @ EACH END,

SEE 13/S-2.51 - EXTRA PURLIN FOR ROOF UNIT OVER 750 LBS

(MAX 1500 LBS) 17 8-2.51

- SEE NOTE #3

- <u>8</u> S-2.51

- BEAM SPLICE LOCATION AS NEEDED (SEE DET 7/S-2.51)

---- STRAP SPLICE AS NEEDED (SEE DET 19/S2.51)

- DOUBLE PURLIN AT BRACING CONNECTION (3 PLACES)

ROOF PURLIN (OR ALTERNATE OPTION Z4 x 2 1/2 x 0.105") SEE 11/S-2.51


1/4" STIFFENER PLATE AT EACH PURLIN ON SIDE BEAMS

- SEE NOTE #2


Z6 x 2 1/2 x 0.075" ROOF PURLIN BLKING AT MIDSPAN (TYP) SEE 8/S2.51 SIM

OVERHANG BEAM, SEE 5/S-2.60

3 S-2.60 ** OPT. 5'-0" OVERHANG ALLOWED AT ONLY ONE END OF BUILDING

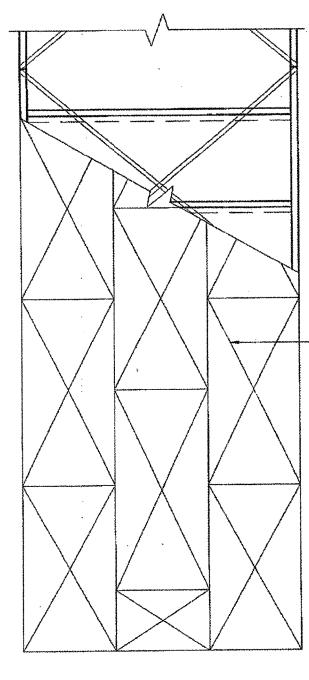

- 3/4" T&G OSB EXPOSURE 1 UNBLOCKED PLYWOOD SHEATHING (P1.1 48/24 MIN). TYP AT ALL MODULES (SEE SHEET S0.1 ROOF DIAPHRAGM FOR ATTACHMENT)

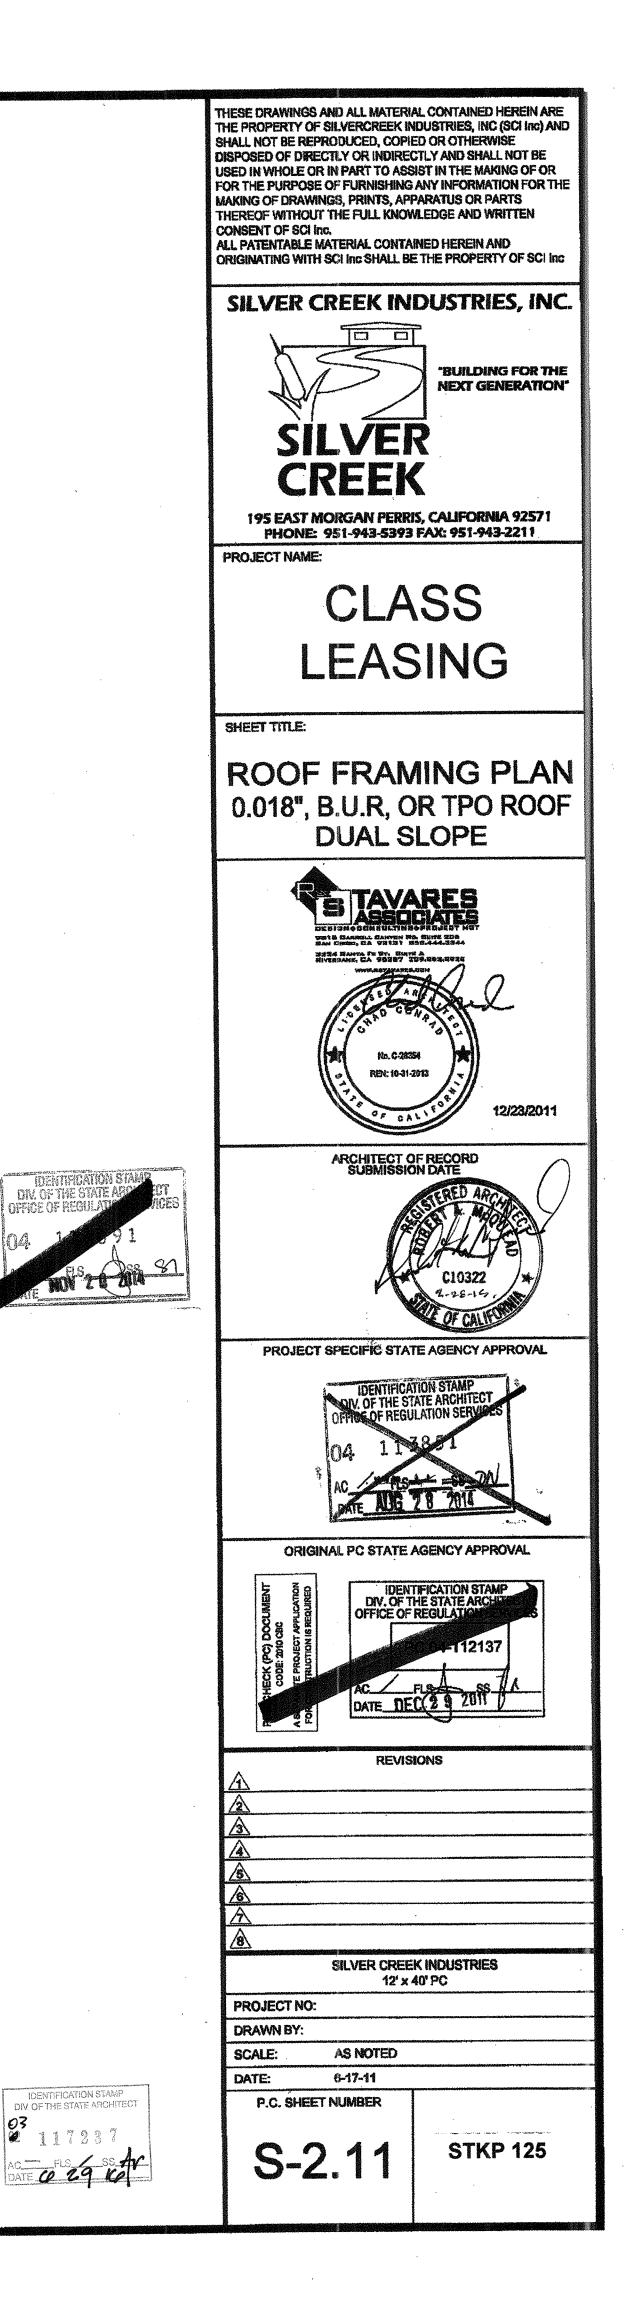

OFFICE OF