


**ENTRY RAMP AND LANDING SPECIFICATIONS**

EACH MODULE SHALL HAVE A RAMP AND LANDING TO CONFORM TO TITLE 24 FOR SECTIONS 3306 AND 3307. THE RAMP AND LANDING STRUCTURES INCLUDING HANDRAIL AND RAIL, GUIDES AND JOIST BEAMS SHALL BE FABRICATED METAL IN SECTIONS THAT ARE DEMOUNTABLE FOR MOVING AND REINSTALLATION AT A NEW SITE.

DESIGN SHALL BE SUCH THAT HEIGHT ADJUSTMENT CAN BE MADE AT THE INSTALLATION SITE. TUBING SHALL BE STEEL CONFORMING TO ASTM A500 GRADE B. THE RAMP SURFACE SHALL BE 12 GA. SHEET METAL FINISHED BY APPLICABLE FINISH. RAMP AND LANDING SHALL HAVE A NON-SKID SURFACE FINISHED BY AMERICAN CHEMICAL CO. OR EQUIVALENT. ALL RAMP SURFACES SHALL BE PAINTED AS INDICATED IN SECTION 3.3.19. RAMP SHALL HAVE HANDRAILS ON BOTH SIDES. WALL MOUNTED HANDRAILS SHALL BE OF SIMILAR CONSTRUCTION TO THE INTERIOR RAMP HANDRAIL.

RAMP AND LANDING SHALL BE FULLY SKIRTED WITH THE SAME MATERIAL USED FOR BUILDING SKIRT. SIDES OF RAMP AND LANDING THAT DO NOT ADJOIN BUILDING WALL SHALL BE SKIRTED. ALL EDGES OF THE PLYWOOD SKIRT SHALL BE SUPPORTED AND PROTECTED FROM WEATHER. FOUNDATION MEMBERS SHALL BE AS FOR BUILDING FOUNDATION. ONLY THE FOUNDATION PAD RESTING ON GRADE MAY EXTEND BEYOND THE OUTSIDE FACE OF THE SKIRT 1\"/>

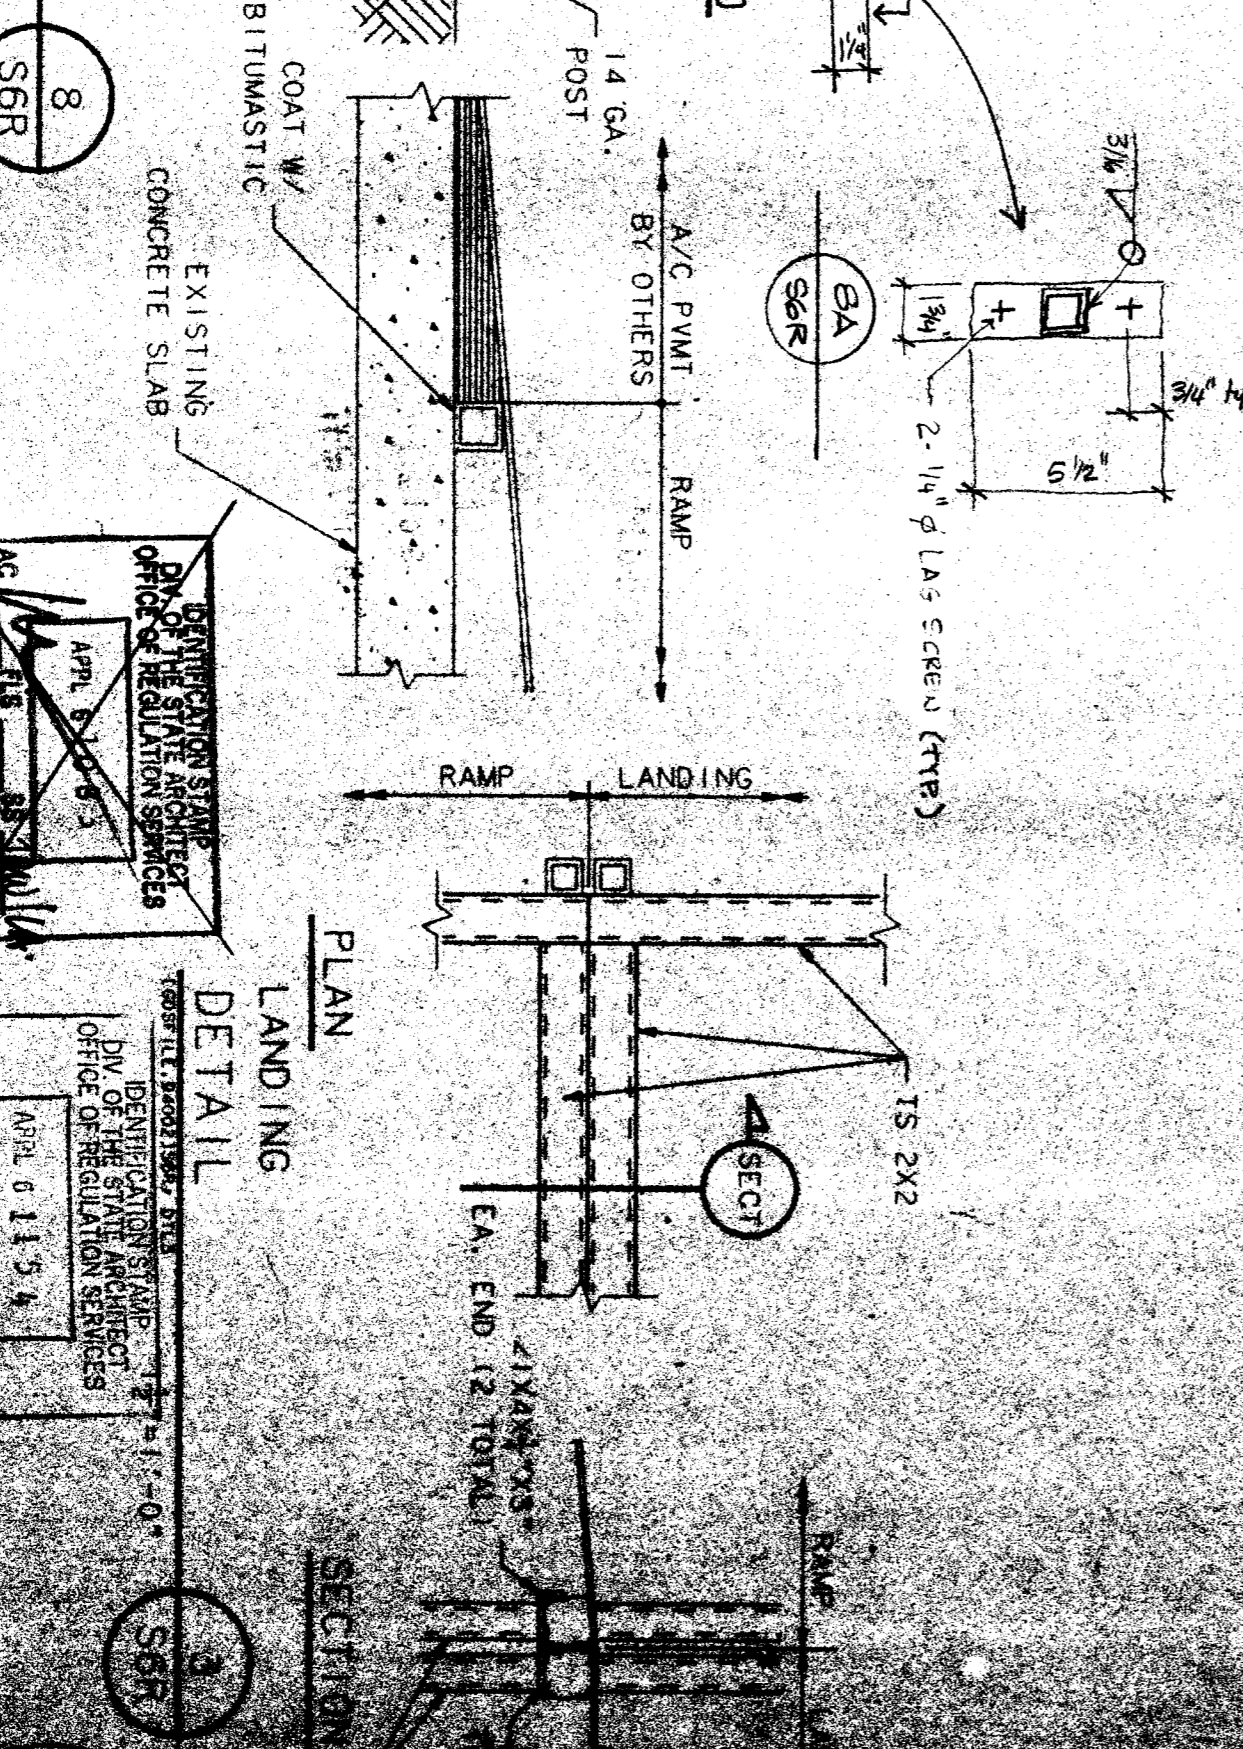

36 X 40 RELOCATABLE CLASSROOM

**American Modular Systems**

CUSTOMER: VARIOUS SCHOOLS THROUGHOUT CALIFORNIA

DATE: 1-7-94

SCALE: 1/8\"/>

NO. DATE DESCRIPTION

1. 1-7-94

2. 1-11-94

3. 2-15-94

4. 2-15-94

5. 2-15-94

6. 2-15-94

7. 2-15-94

8. 2-15-94

9. 2-15-94

10. 2-15-94