

| | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

REGIONS

Mechanical Engineer's Seal
Structural Engineer's Seal
Professional Engineer's Seal

STATE OF CALIFORNIA
REGISTERED PROFESSIONAL ARCHITECT
No. 53413
S. V. MISHRA
DATE: 02/08/99

PC - 270
DATE: FEB 19 1999
REVISED
















IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
OFFICE OF REGULATION SERVICES
Architects Seal

MODTECH INC.
2830 BARRETT AVENUE
PERRIS, CALIF. 92572
PH (909) 943-4014
FAX (909) 940-0427

PROJECT NUMBER: MODTECH, INC. 1999

ARCHITECTURAL DETAILS

A6.0
DRAWN BY: RRF
CHECKED BY: 2-79
DATE: 2-79

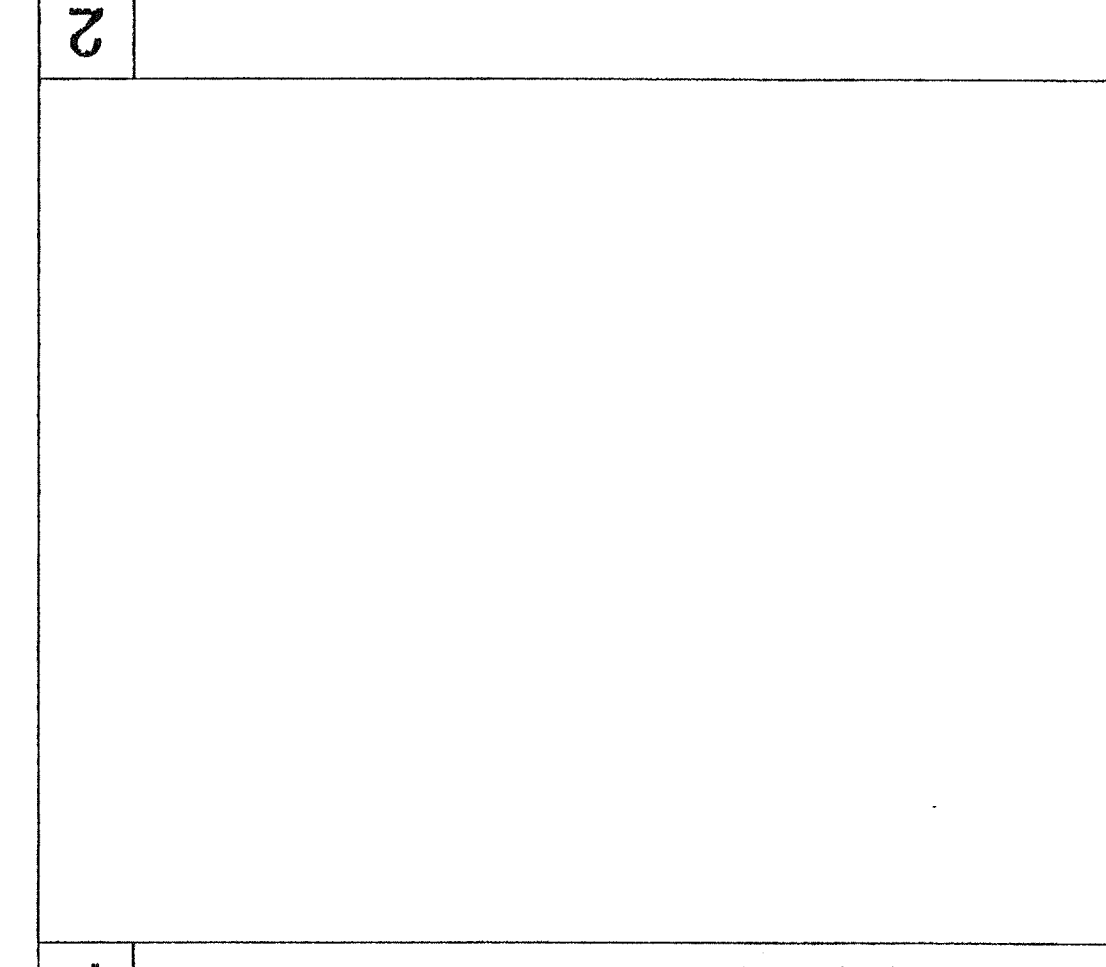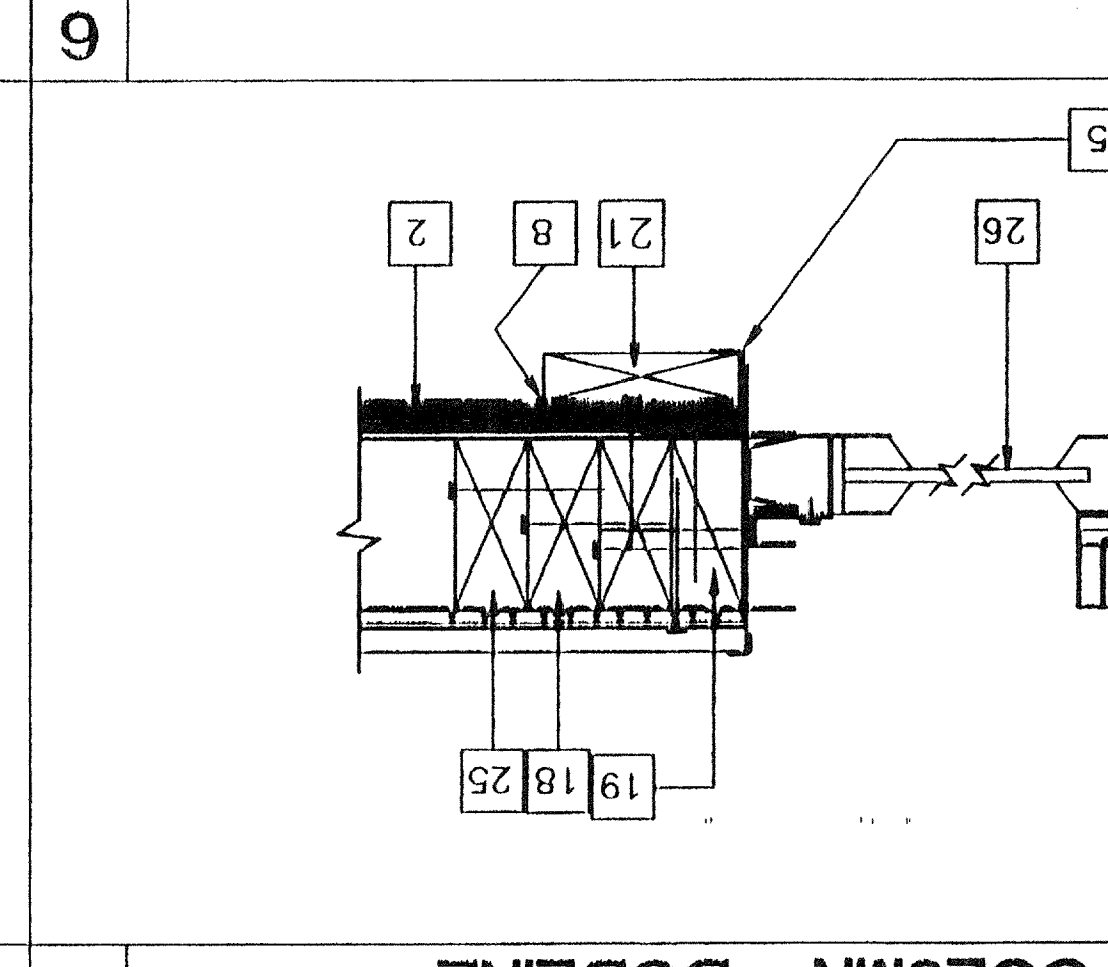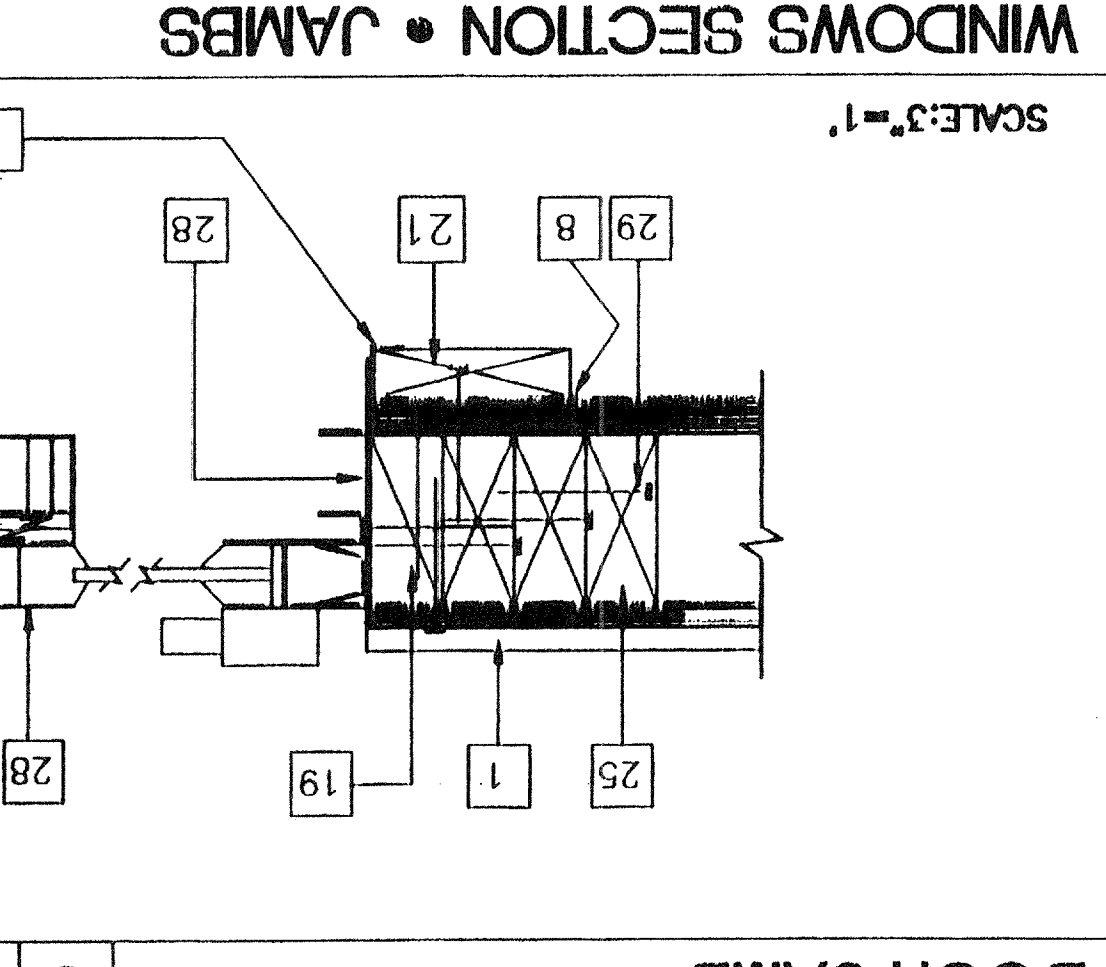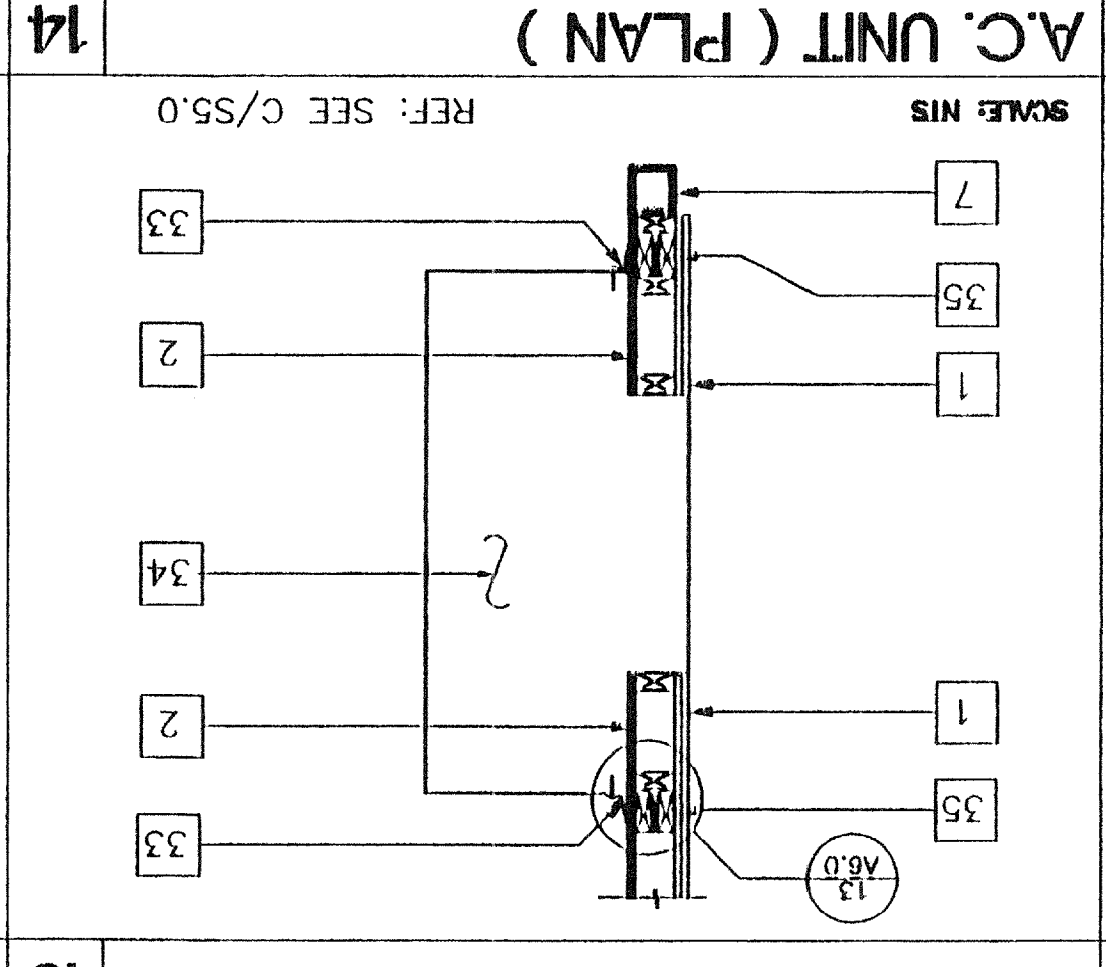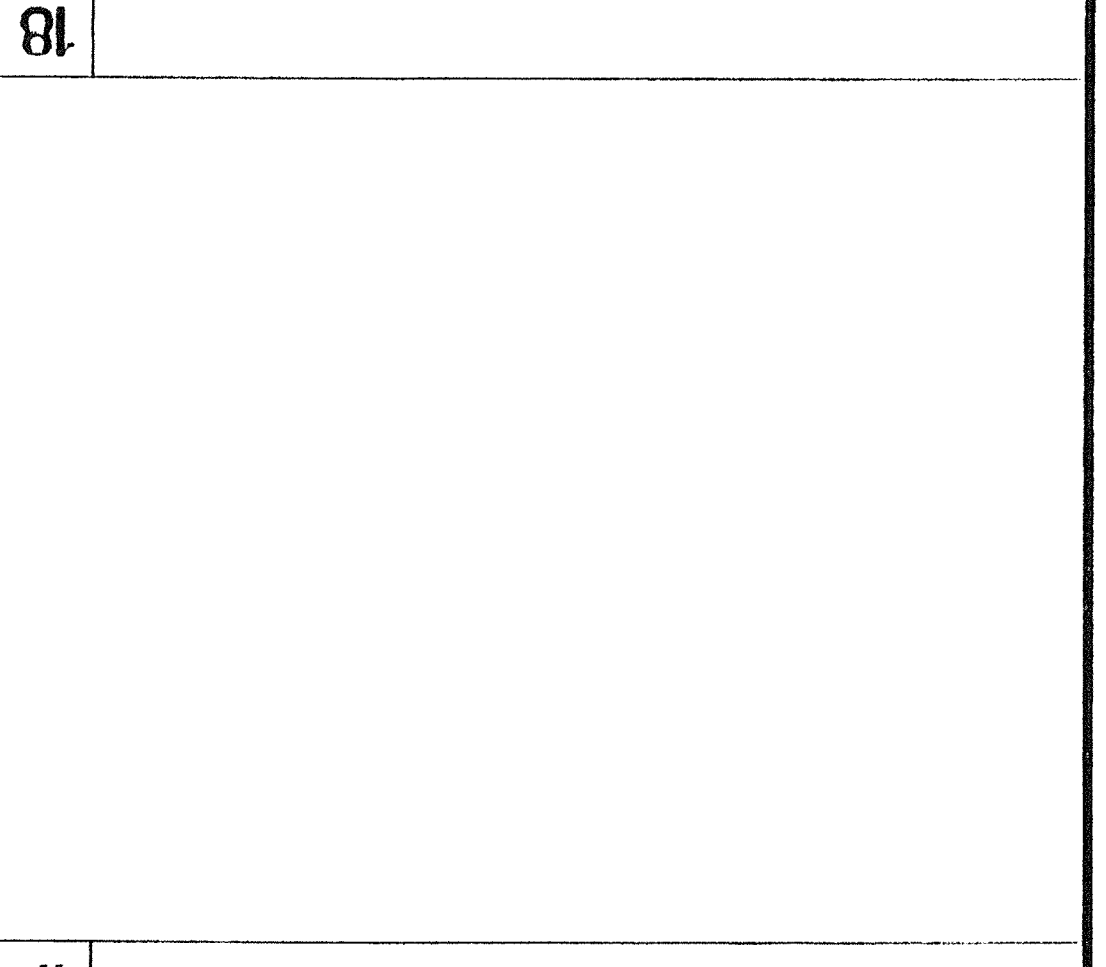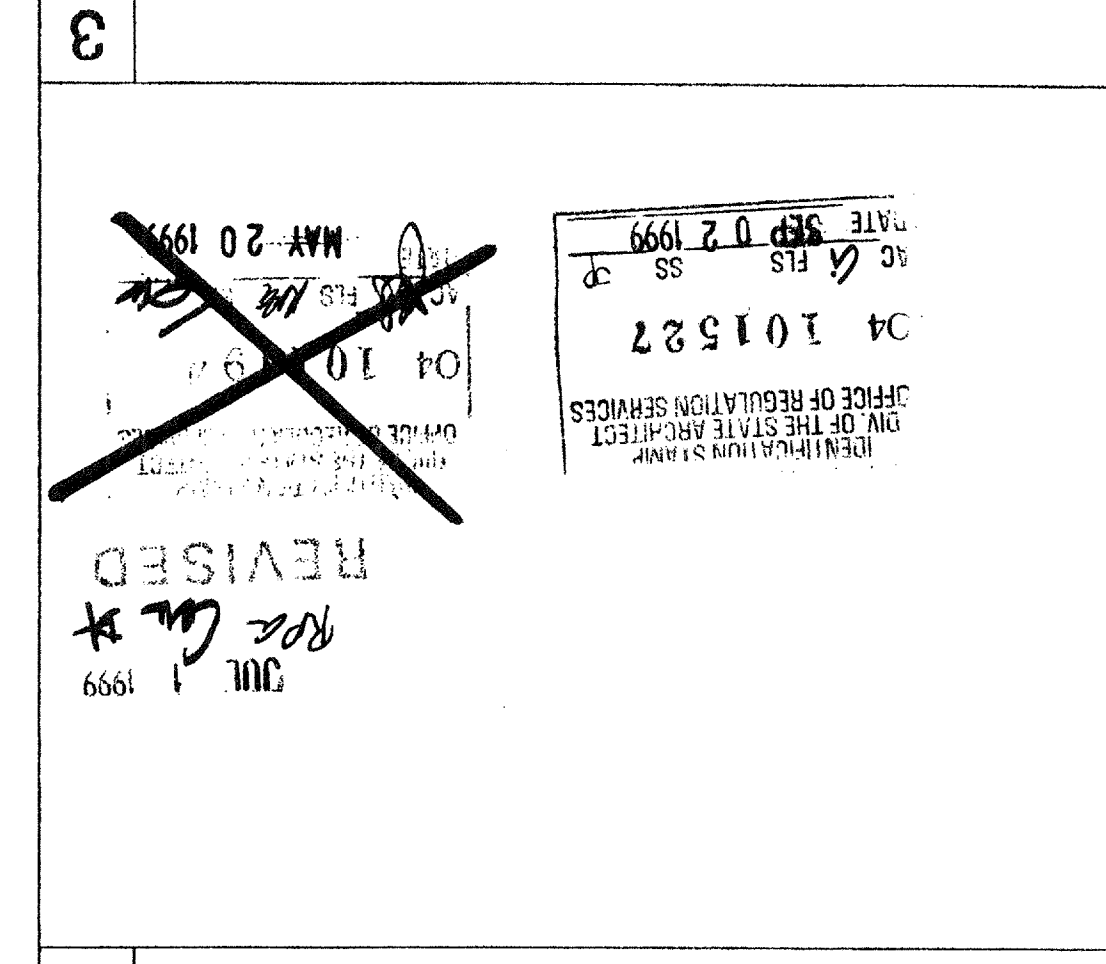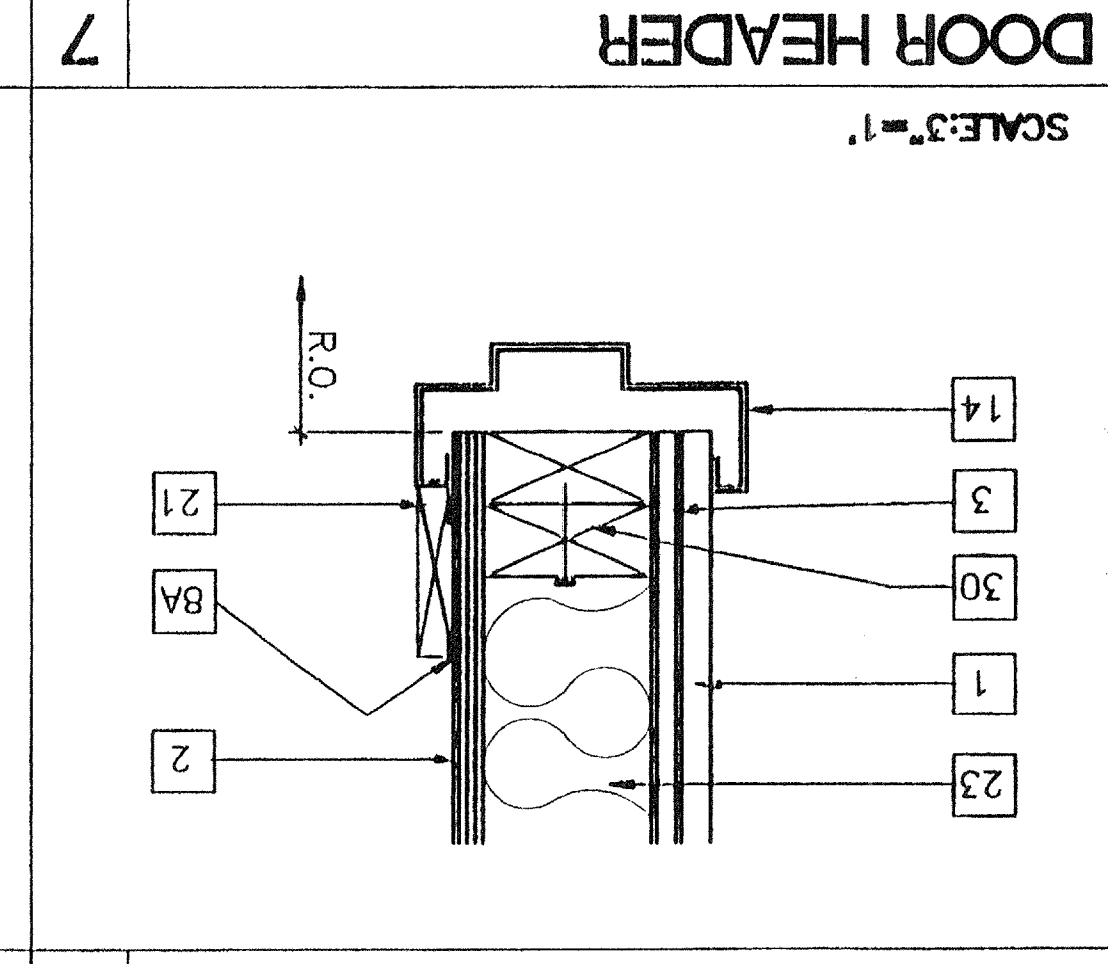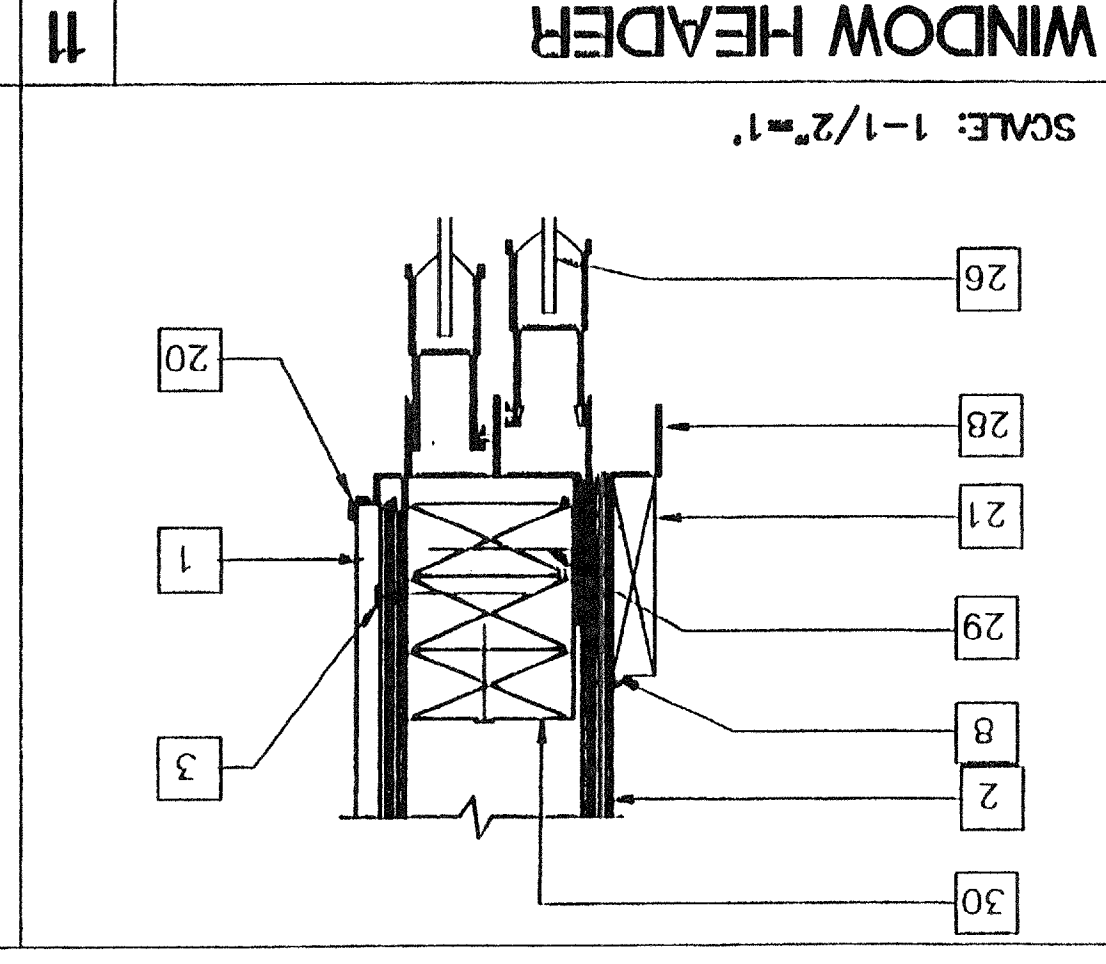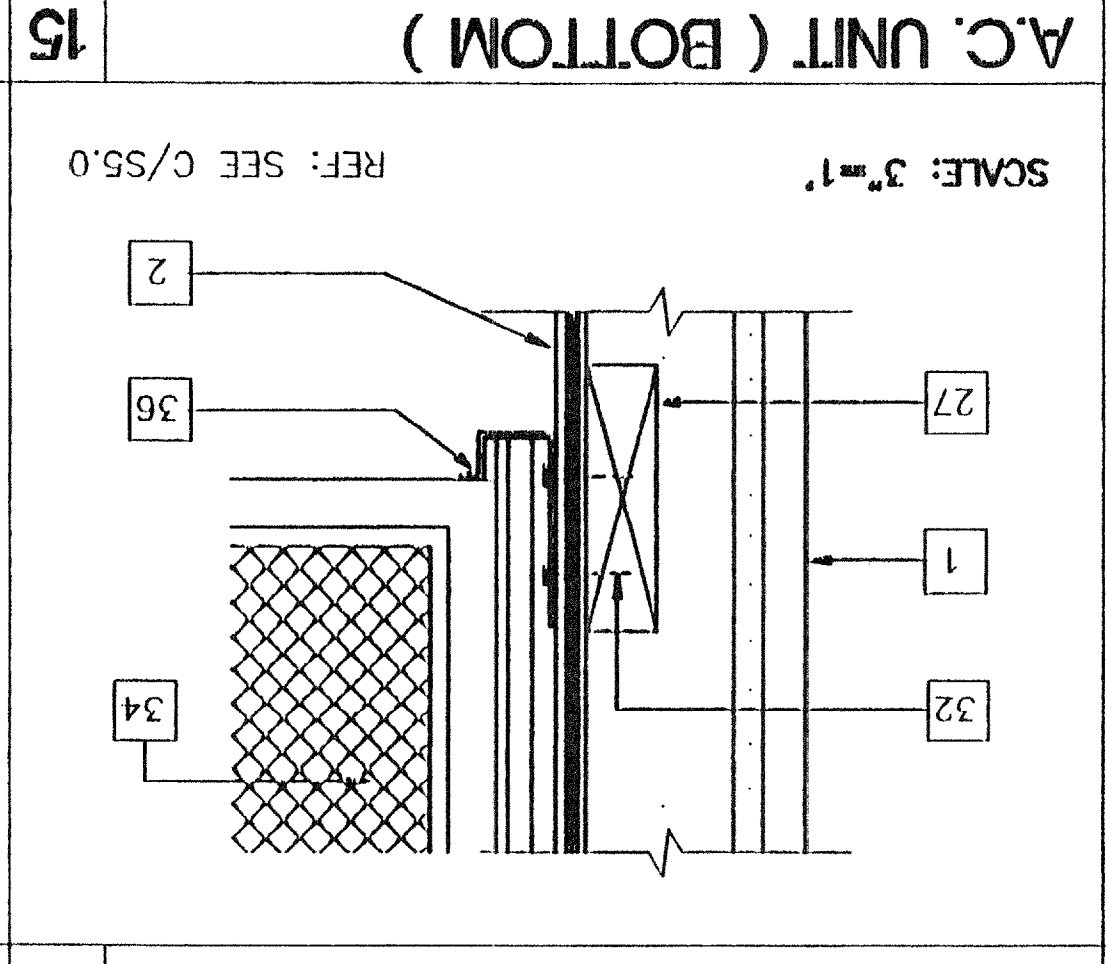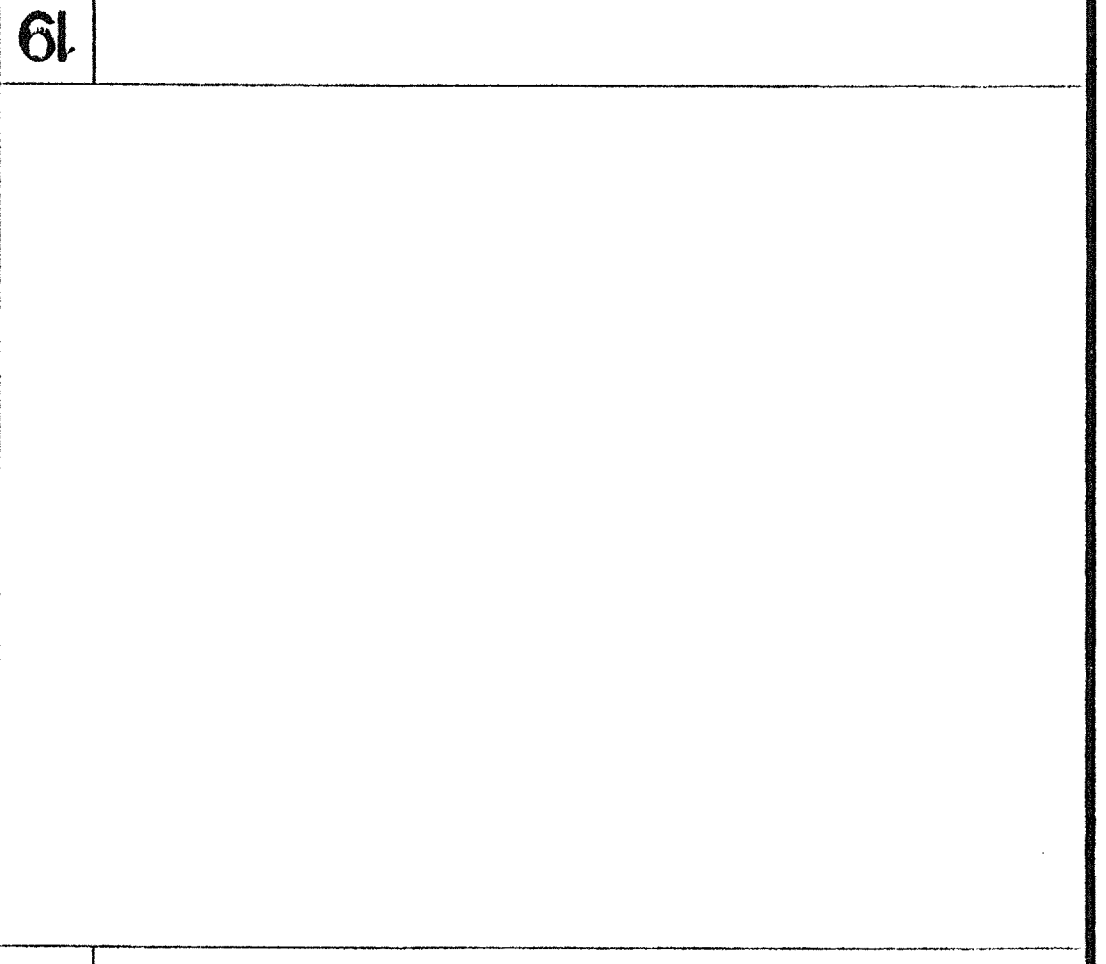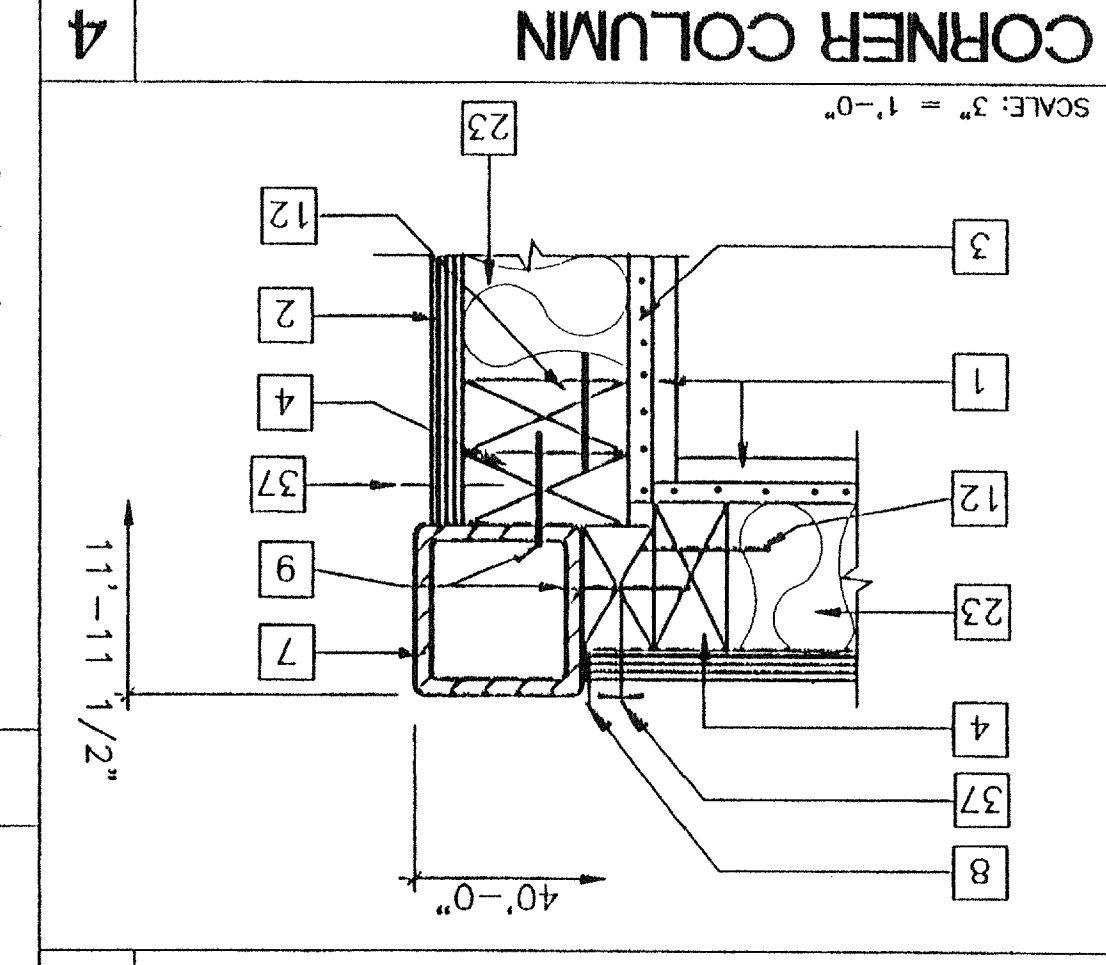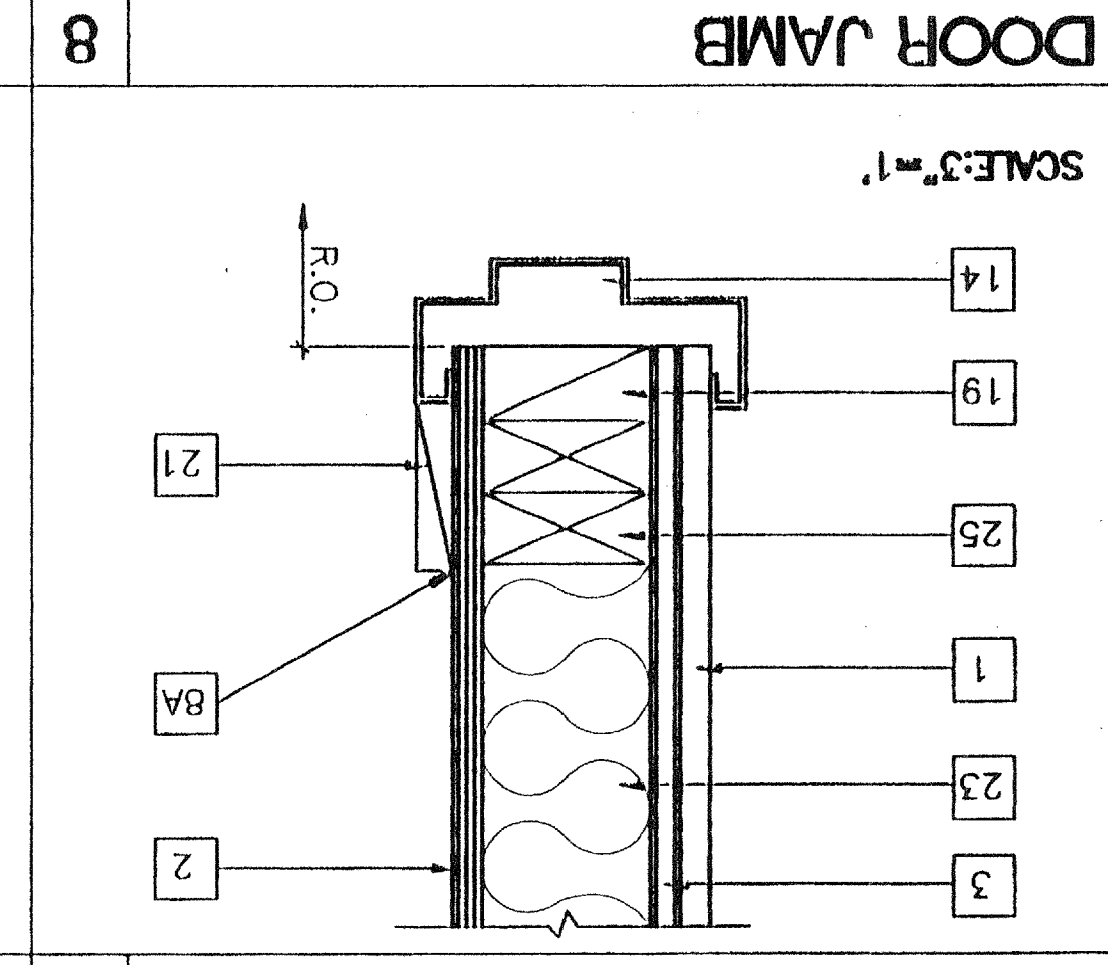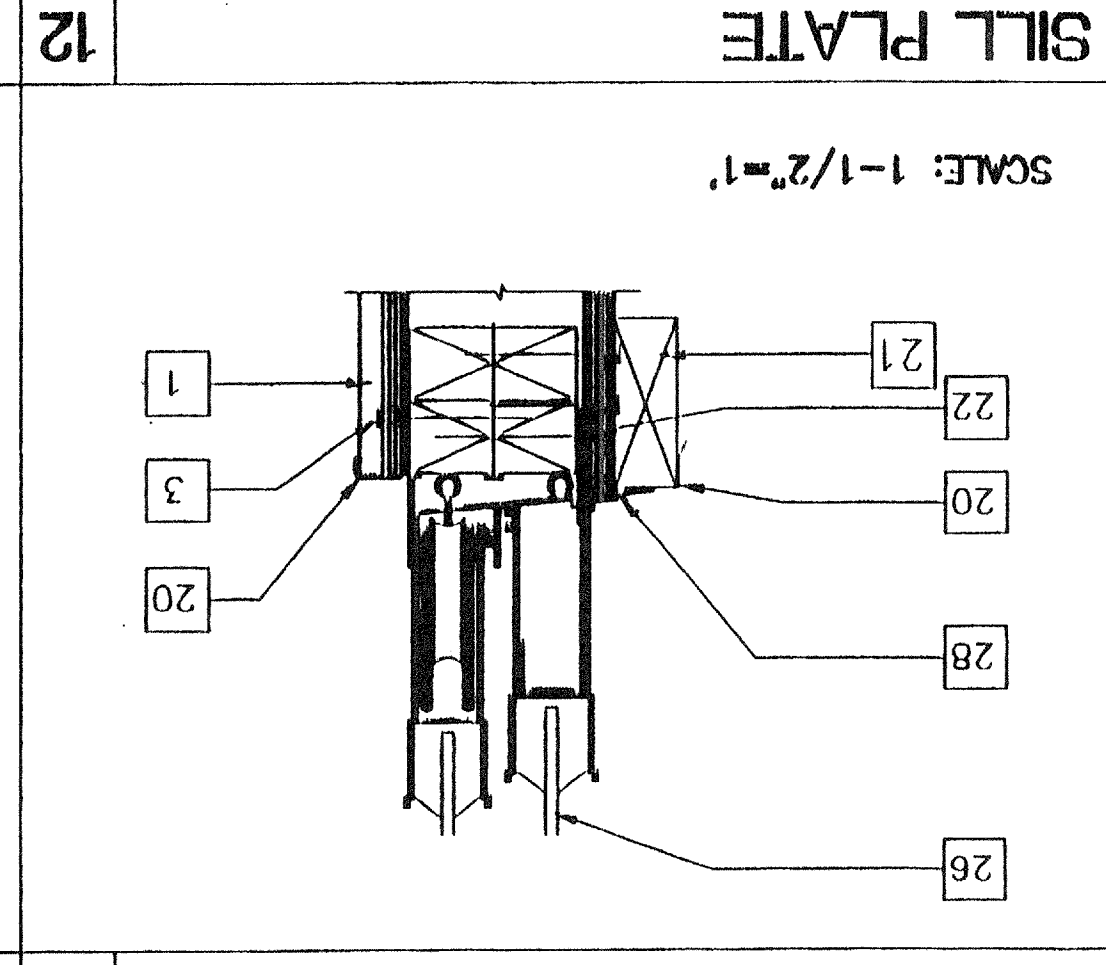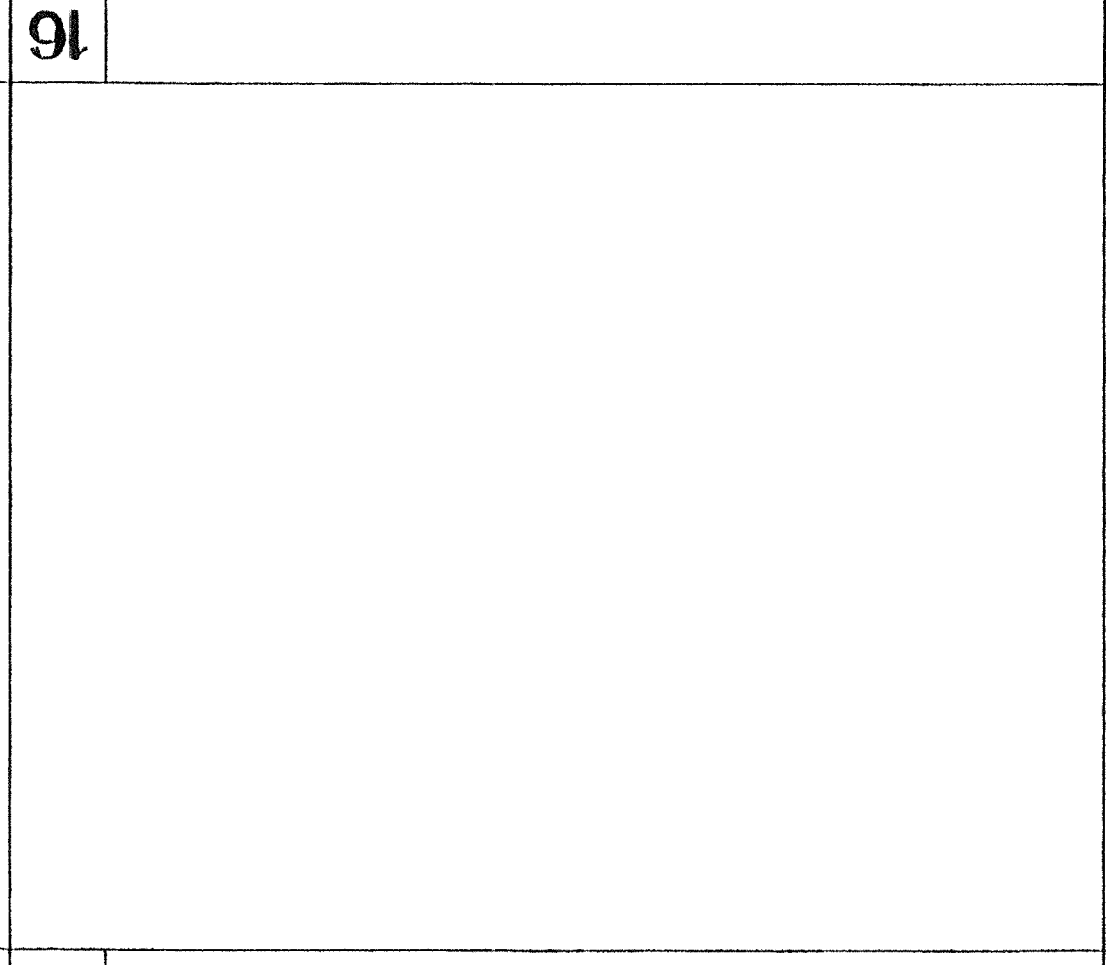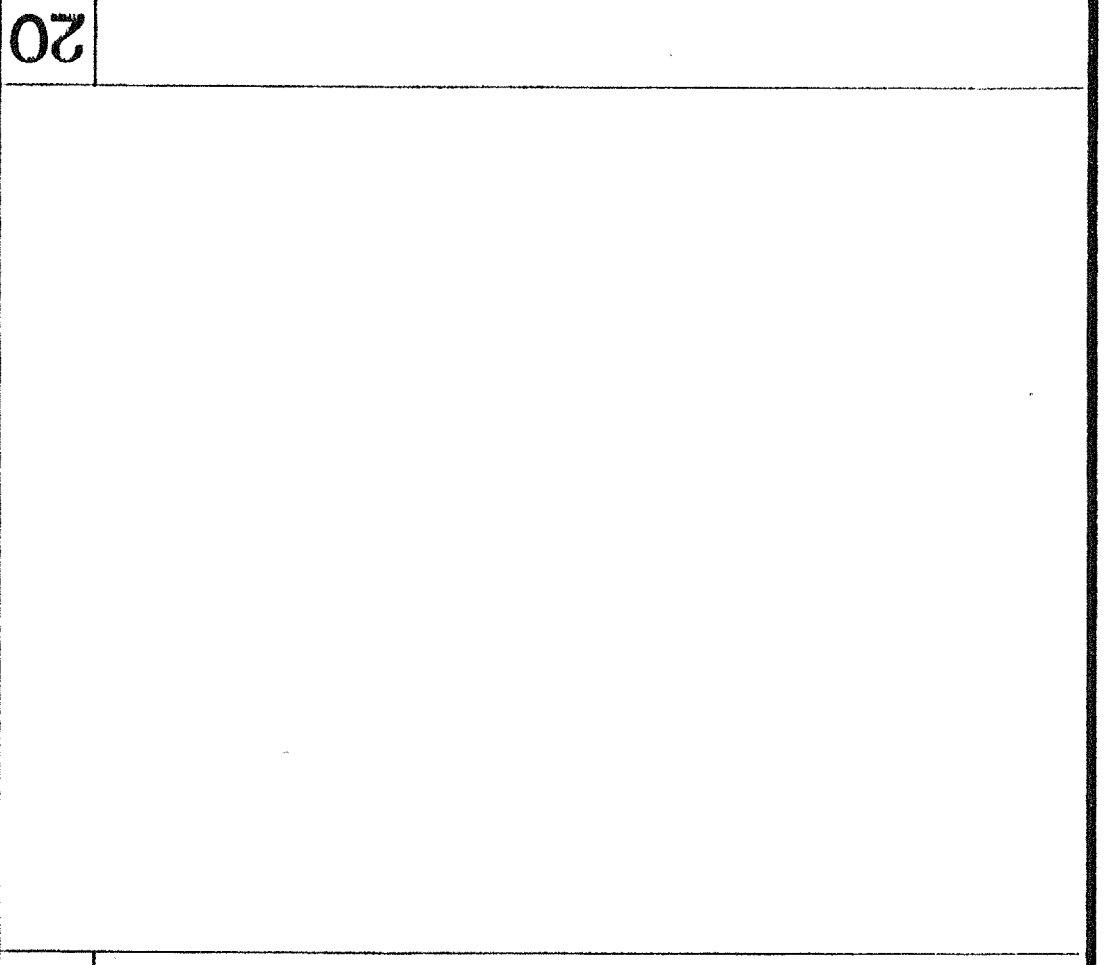

NOTES

1. EN 8d ELECTRO GALV. AT 6" O.C.
2. FN 6d ELECTRO GALV. AT 12" O.C.
3. SEE SHEET SS.0 FOR TYPICAL WALL FRAMING MAILING
4. INSULATION MATERIALS INSULATED WITHIN FLOOR-CEILING ASSEMBLIES, ROOF-CEILING ASSEMBLIES, WALLS, CRAWL SPACES, OR ATTIC SHALL HAVE A FLAME-SPREAD RATING NOT TO EXCEED 25 AND A SMOKE DENSITY NOT TO EXCEED 450, EXCEPT AS NOTED.
5. WHEN MATERIALS ARE INSULATED CONCEALED SPACES OF TYPES I, II, IV, AND V CONSTRUCTION, THE FLAME SPREAD AND SMOKE-DEVELOPED LIMITATIONS DO NOT APPLY TO FACINGS. IF THE FACING IS INSTALLED IN SUBSTANTIAL CONTACT WITH THE UNEXPOSED SURFACE OF THE CEILING, FLOOR OR WALL FINISH. (SEC. 707.3 CBC)

NOTES

1. 1-1/2"x1-1/2"x1/8" LONG (BY HVC MFR.) ATTACHED TO M/C W/ #10 SELF TAPPING SHEET METAL SCREWS AND ATTACH 6-3/8" x 2" GALVANIZED LAG SCREWS
2. 1-1/2"x1-1/2"x1/8" LONG (BY HVC MFR.) ATTACHED TO M/C W/ #10 SELF TAPPING SHEET METAL SCREWS AND ATTACH 6-3/8" x 2" GALVANIZED LAG SCREWS
3. 2X4 W/ PLYWOOD SPACER- BUILT- UP POST. 8d AT O.C. STAGGERED 2X4 FIRST 2X4 STAGGERED THIRD 2X4 AND ALTERNATE USE 4X4 POST
4. SIDE OF HVAC UNIT SEE [HV]
5. 2X4 W/ PLYWOOD SPACER- BUILT- UP POST. 8d AT O.C. STAGGERED 2X4 FIRST 2X4 STAGGERED THIRD 2X4 AND ALTERNATE USE 4X4 POST
6. EN - 8d BOX ELECTRO GALV. AT 6" O.C.
7. FN - 8d BOX ELECTRO GALV. AT 12" O.C.

KEY NOTES

1. TYP. INTERIOR FINISH (SEE FINISH SCHEDULE)
2. TYPICAL EXTERIOR FINISH
3. 1/2" GYP. BOARD BACKING W/ 7d COOLER NAILS AT MAX 7" O.C. TYP. AT EA. STUD
4. 2X4 STUD TYP. AT 16" O.C. MAX.
5. CORNER MOLD
6. 26GA SHEET METAL FLASH 2" x 4" x LENGTH
7. TUBE STEEL COLUMN SEE [STR]
8. SEALANT TYP. (SEE SPECS.) BA) SEALANT BEHIND TRIM
9. #10 S.T.S.M.S. AT MAX. 24" O.C. (ALT. HILTI 0.145 SHOT PIN) 2X FILTER TO COLUMN
10. VINYL CLOSURE
11. MODULE JOINT
12. 16d AT 24" O.C. FACE NAIL OR 16d AT 12" O.C. TOE NAIL (SEE SHEET SS.1)
13. FLOOR BEAM SEE [STR]
14. PRESSED STEEL FRAME (K.D. TYPE SEE AS.0)
15. ALUMINUM THRESHOLD (SEE HARDWARE SCHEDULE)
16. FINISH LANDING SEE FLOOR PLAN AND FOUNDATION FOR TYPE AND FINISH
17. DOOR BOTTOM (SEE HARDWARE SCHEDULE)
18. (2) 2X4 KING STUD (SEE SHEET SS.0)
19. 2X4 TRIMMER (SEE SHEET SS.0)
20. 7" MOLD 26GA
21. 1X4 WOOD TRIM W/ 8d ELECTRO GALV. AT 12" O.C.
22. (2) 2X4 SILL PLATE W/ 16d AT 16" O.C.
23. INSULATION (SEE SPECS. FOR SIZE AND TYPE)
24. FINISH FLOORING (SEE FINISH SCHEDULE SHEET AS.0)
25. 2X4 JAMB STUDS (SEE SHEET SS.0) DETAILS FOR NUMBER OF STUDS REQUIRED AND MAILING SCHEDULE FOR MAILING
26. WINDOW GLAZING (SEE WINDOW SCHEDULE SHEET AS.0)
27. 2X6 LET IN (SEE WALL FRAMING SHEET SS.0)
28. ALUMINUM WINDOW FRAME WITH MAIL-ON FINISH. INSTALL W/ MIN. 3" BLDG. PAPER BETWEEN FINISH AND FRAMING.
29. 16d BOX STAGGERED AT MAX. 24" O.C.
30. HEADER 12/SS.0
31. DOOR (SEE DOOR SCHEDULE) AS.0
32. 6-3/8" x 2" GALVANIZED LAG SCREWS
33. 1-1/2"x1-1/2"x1/8" LONG (BY HVC MFR.) ATTACHED TO M/C W/ #10 SELF TAPPING SHEET METAL SCREWS AND ATTACH 6-3/8" x 2" GALVANIZED LAG SCREWS
34. SIDE OF HVAC UNIT SEE [HV]
35. 2X4 W/ PLYWOOD SPACER- BUILT- UP POST. 8d AT O.C. STAGGERED 2X4 FIRST 2X4 STAGGERED THIRD 2X4 AND ALTERNATE USE 4X4 POST
36. EN - 8d BOX ELECTRO GALV. AT 6" O.C.
37. FN - 8d BOX ELECTRO GALV. AT 12" O.C.

