INTERIOR FINISH SCHEDULE

END POINT FLAME RATING 170

UNIT NUMBER	ROOM NO.		FLOORS: BASE CEMENT; GREASE PROOF ASPHALT TILE; ASPHALT TILE; HARDWOOD FLOOR; TILE	BASE: ASPHALT TILE COVE; TILE CERAMIC; WOOD COMBINATION; TILE; CEMENT BASE	WALLS: 5/8" GYPSUM WALLBOARD; SAND PLASTER; CEMENT PLASTER; 1/2" PLYWOOD; 4'-0" TILE WAINSCOT; PLASTIC TILE WAINSCOT; FIBREFLEX REDWOOD PANELING; 5/8" GYPSUM BOARD BACKING (HR); SAND PLASTER	CEILINGS: ACOUSTIC TILE; ENAMELED ACOUSTIC TILE; CEMENT PLASTER; EXPOSED WOOD; 5/8" GYPSUM BOARD BACKING (HR); SAND PLASTER	TRIM: DOORS; SASH & TRIM; CABINET WORK; WOOD TRIM	MISCELLANEOUS: LINOLEUM TOPS; FORMICA TOPS; INSULATION; WEST WALL; PLASTIC FINISH WALL PANELING
1	MULTI-PURPOSE RM	1	•	•	W 1	• 2W	•	
1	PLATFORM	2	•	•				
1	PASSAGE WAY	3	•	•				
1	PASSAGE WAY	4	•	•				
1	CHAIR STORAGE	5	•	•				
1	CHAIR STORAGE	6	•	•				
1	MEN	7	•	•				
1	WOMEN	8	•	•				
1	GARBAGE	9	•					
1	WALK-IN BOX	10	•					
1	HALL	11	•	•				
1	STORAGE	12	•	•				
1	KITCHEN	13	•	•				•
1	DISHWASHING	14	•					•
1	HEATER RM.	15	•					
1	TOILET RM.	16	•	•				
1	SERVICE RM.	17	•	•				
1	CONFERENCE RM.	18	•	•				•
2	LOBBY	19	•	•		2		•
2	CLERK	20	•	•		2		•
2	PRINCIPAL	21	•	•		2		•
2	TOILET	22	•	•		2		•
2	MIMEOGRAPH	23	•	•		2		•
2	HALL	24	•	•		2		•
2	HEALTH	25	•	•		2		•
2	SUPPLY	26	•	•		2		•
2	TOILET	27	•	•				•
2	SHOWER	28	•	•				•
2	LOCKROOM	29	•	•		2		•
2	ELECTRICAL RM.	30	•	•				
2	TEACHER'S WORK	31	•	•		2		•
2	KINDERGALTEN	32	•	•		2		•
2	TOILET	33	•	•				•
2	LAVATORY	34	•	•				•
2	TOILET	35	•	•				•
2	TOILET	36	•	•				•
2	LAVATORY	37	•	•				•
2	TOILET	38	•	•				•
2	COAT CLOSET	39	•	•		2		•
2	TOILET	40	•	•				•
2	COAT CLOSET	41	•	•		2		•
2	WORK ROOM	42	•	•		2		•
2	KINDERGALTEN	45	•	•		2		•
3	CLASSROOM	44	•	•		2		•
3	CLASSROOM	45	•	•		2		•
3	CLASSROOM	46	•	•	W	2		•
3	BOILER	47	•					
3	JANITOR	48	•					
3	CLASSROOM	49	•	•	W	2		•
3	LIBRARY	50	•	•		2		•
3	BOY'S	51	•	•				•
3	GIRL'S	52	•	•				•
4	CLASSROOM	53	•	•		2		•
4	CLASSROOM	54	•	•		2		•
4	CLASSROOM	58	•	•		2		•
4	WOMEN	56	•	•				•
4	MEN	57	•	•				•
4	TOILET	58	•	•				•
4	TEACHER'S LOUNGE	59	•	•		2		•
4	CLASSROOM	60	•	•		2		•
4	CLASSROOM	61	•	•		2		•
4	BOY'S	62	•	•				•
5	GIRL'S	63	•	•				•
5	CLASSROOM	64	•	•		2		•
5	CLASSROOM	65	•	•		2		•
5	CLASSROOM	66	•	•		2		•
5	BOOKROOM	67	•	•				•
6	JANITOR	68	•					
5	CLASSROOM	69	•	•		2		•
5	CLASSROOM	70	•	•		2		•
5	BOY'S	71	•	•				•
5	GIRL'S	72	•	•				•
6	ATHLETIC RM	76	•					

INTERIOR PAINTING LEGEND

1. PLASTER SURFACES
   TWO COATS OF 720 "FULL COLOR"
2. NATURAL FINISH WOOD SURFACES (PLYWOOD AND OTHERS)
   ONE COAT OF 2215 "PURE PREPARED PAINT" RUBBED OFF
   TWO COATS "SATIN FLAT VARNISH"
3. ALL OTHER WOOD SURFACES
   ONE COAT OF 4410 "ENAMEL UNDER COAT"
   ONE COAT "SPLIT 1/2 ENMEL UNDER COAT 1/2 FULLERGLOW."
   ONE COAT "720 FULLERGLOW"
4. METAL SURFACES
   ONE COAT OF 4080 "GRAY CHROMATE PRIMER" (REGARDLESS WHETHER PR MED BY OTHERS)
   ONE COAT OF 520 "FULLERGLOW"

EXTERIOR PAINTING LEGEND

PLASTER SURFACES:
INTEGRAL COLORING BLUE DIAMOND EXTERIOR COLORED STUCCO

WOOD SURFACES (EXCEPT DOORS)
ONE COAT OF 178 "PURE PREPAREL PRIMER"
TWO COATSOF 4449 "FULL TEC" TRIM COLOR

NATURAL FINISH WOOD DOORS:
ONE COAT OF 2215 "PURE PREPAREL PAINT" RUBBED OFF
TWO COATS OF "MARINE FULLER SPAR" (THIN FIRST COAT ONE PINT OF TURPENTINE TO THE GALLON)

METAL SURFACES
ONE COAT OF 4080 "GRAY CHROMATE PRIMER" (REGARDLESS WHETHER PRIMED BY OTHERS)
ONE COAT OF 4449 "FULL TEC" COLOR TRIM

NOTE: EAST WALL RM 46 — PLASTER
WEST WALL RM 49 — PLASTER
NORTH WALL RM 1 — 5/8 GYPSUM WALLBOARD
1x4 STRIPPING 4'-0" O.C.
2x RWS PANELING.

WOOD FINISH NAILING SCHEDULE

ITEM	THICKNESS	NAILING (MIN)	REMARKS
INTERIOR			
PLYWOOD	1/4"	2d FIN @ 6"	ALL SIDES & 12" CC. INTERM.
	3/8"	" " " "	" " " 16 " "
	1/2"	4d " " 8	" " " " "
	3/4"	6d " " "	" " " " "
TRIM	3/8"	2d FIN @ 9"	(a)
	1/2"	4d " " "	"
	5/8"	6d " " "	"
	3/4"	" " "	"
	1"	8d " " "	"
	1 1/2"	12d " " "	"
FRAMES DOORS SASH ETC.	1"	8d casing @ 12"	(a)
	1 1/8"	10d " " "	"
	1 1/4"	12d " " "	"
	1 1/2"	" " 16	"
	1 3/8"	20d " " 24	"
FLOORING	TO 3/4"	8d CUT @ 16"	BLIND NAIL FOR T&G
GYPSUM BOARD	1/2"	4d CEM COAT @ 6"	
ACOUSTIC TILE	1/2"	1 1/4" 16 GA @ 12" & @ EA COR.	BLUED, COLLAR HEAD
EXTERIOR			
TRIM	3/4"	6d GALV CSG @ 9"	(a)
	1"	8d " " "	"
	1 1/2"	12d " " "	"
ROOF FASCIA	3/4"	6d GALV BOX @ 8"	"
	1 3/8"	12d " " "	"
SHEET METAL	TO 20 GA	4d GALV. BOX	SPACE AS REQUIRED UP TO 24" C.C. MAX.

NOTE (a) BOARDS UP TO 1" WIDE = ONE ROW OF NAILS
1" TO 5" " = STAGGERED (B)
5" TO 8" " = TWO ROWS OF NAILS
8" TO 11" " = THREE ROWS OF NAILS
11" TO 14" " = FOUR " "

NOTE (B) USE TWO NAILS AT ENDS: PREDRILL TO PREVENT SPLITTING

NOTE (C) SET ALL FINISH CASING AND BOX NAIL HEADS FOR PUTTY SEAL (EXCEPT IN SHEET METAL)

NOTE (D) ANY TRIM NOT COVERED ABOVE SHALL BE NAILED TO PROVIDE NAIL PENETRATION INTO BEARING EQUAL TO 1 1/2 TIMES THE BOARD THICKNESS. FOR BOARD THICKNESSES UP TO 1 3/8" AND ONE TIMES FOR BOARD THICKNESS OVER 1 3/8" AND SPACED SO AS TO MEET BEARINGS, AND PREVENT WARPING, CRACKING OR PARTING.

F.S.D. MOLDING FOR COPING BOARD

F.S.D. COMBINATION BASE & SHOE

F.S.D. TYPICAL TRIM

WINDOW SCHEDULE

TYPE	QUANTITY	SIZE (VARIES TO SUIT ELEVATIONS)	DESCRIPTION
1	2	5'-8" x 4'-9"	1/4" PLATE GLASS - WOOD STOPS
2	136	3'-8 1/16" 8'-11"	ALTERNATE TO 200 - STEEL SASH - ESB
3	1	2'-8 1/16" x 2'-9"	" " "
4	186	3'-8 1/16" x 2'-9"	" " "
5	18	3'-8 1/16" x 4'-1"	" " "
6	7	3'-8 1/16" x 1'-5"	" " "
7	22	3'-8 1/16" x 4'-1"	" " "
8	2	4'-8 1/16" x 2'-9"	" " "
9	2	4'-8 1/16" x 2'-9"	" " "

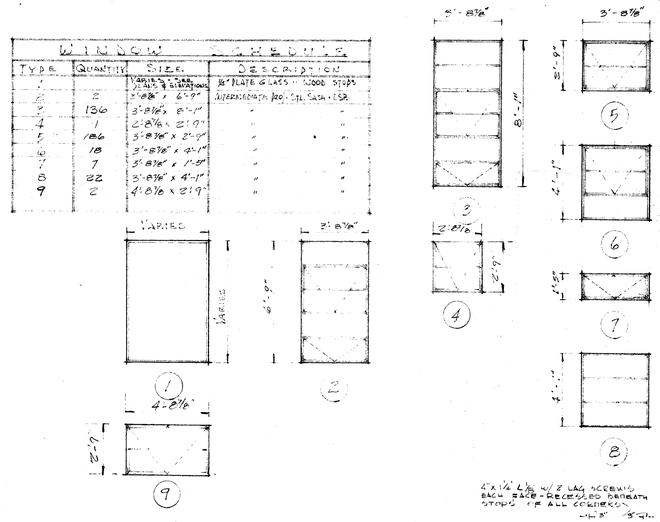

DOOR SCHEDULE

TYPE	QUANTITY	THICK.	SIZE	DESCRIPTION
A	2	1 3/8"	2'-6" x 7'-0"	SLAB
B	14	"	2'-8" x 6'-8"	"
C	8	"	3'-0" x 6'-8"	"
D	1	"	3'-6" x 7'-0"	SLAB SLIDING DOOR W/ SHELF
E	13	"	3'-0" x 7'-0"	SLAB
F	23	"	3'-6" x 7'-0"	"
G	4	1 3/8	3'-8" x 7'-0"	LAMINATED REDWOOD
H	1	1 3/4	3'-6" x 7'-0"	WOOD FRAME - 1/4" PLATE GLASS
J	1	"	3'-6" x 6'-8"	" " "
K	20	"	3'-6" x 6'-8"	SLAB - 1/4" PLATE GLASS
L	2	"	2'-8" x 7'-0"	" " "
M	2	"	3'-0" x 7'-0"	CLASS 'C' FIRE DOOR
N	1	"	3'-6" x 7'-0"	" "
O	1	5 1/8	2'-6" x 6'-6"	INSULATED PLYWOOD DOOR
P	12	1 3/8	2'-6" x 6'-8"	SLAB
R	5	"	3'-6" x 6'-8"	SLAB

FRAME & HARDWARE

NOTE:
ALL WOOD FRAME GLASS DOORS REINFORCED AT CORNERS.
ROOM 49 TO HAVE 3'-6" x 6'-8" CLASS C FIRE DOORS

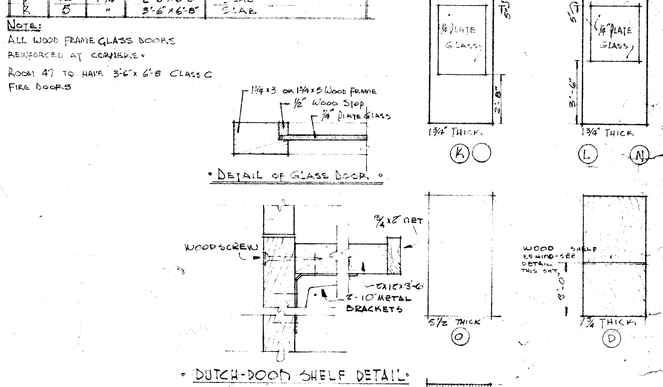

1 3/8 x 3 OR 1 3/8 x 5 WOOD FRAME
1/2" WOOD STOP
1/4" PLATE GLASS

• DETAIL OF GLASS DOOR •

• DUTCH-DOOR SHELF DETAIL •
3" = 1'-0"

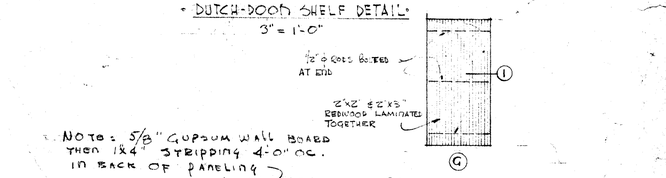

NOTE: 5/8" GYPSUM WALL BOARD THEN 1"x4" STRIPPING 4'-0" OC. IN BACK OF PANELING



DETAIL (1) DOOR G" SCALE: 3"=1'-0"

DIVISION OF ARCHITECTURE

BOARD OF EDUCATION
PRES.
SEC.

• SCHEDULE SHEET •
• DOOR, WINDOW, FINISH, ETC. •
• REAL ROAD SCHOOL •

WHITNEY BIGGAR ARCHITECT
MEMBER AMERICAN INSTITUTE OF ARCHITECTS
3601 STOCKDALE HIGHWAY
BAKERSFIELD, CALIFORNIA
29285 REGISTRATION C-1128

PROJECT NO: 6-58
DRAWN BY: W.B. & W.V.
CHECKED BY
DATE: 9/4/58
SHEET A5 OF 36