ROOM FINISH SCHEDULE

MATERIALS

1. CERAMIC TILE
2. VINYL COMPOSITION TILE
3. CARPET
4. 6" COVED CERAMIC TILE BASE
5. 4" RUBBER BASE (CARPET BASE AT CARPET TOPSET BASE AT VINYL FLOORING)
6. EXISTING PLASTER
7. 5/8" GYP. BD. W/ VENEER PLASTER (MATCH (E) AROUND PLASTER TEXTURE)
8. 3/4" LATH AND PLASTER
9. VINYL COVERED TACKABLE WALL PANELS
10. T-BAR AND ACOUSTICAL PANELS
11. EXISTING T-BAR CEILING GRID
12. LAY-IN ACOUSTICAL CEILING PANELS
13. EXISTING ACOUSTIC CEILING TILE. REPLACE ANY EXPOSED DAMAGED TILES WITH MATCHING TEXTURE & PATTERN ACOUSTIC CEILING TILE
14. EXISTING WOOD
15. SHEET VINYL
16. 6" COVED SHEET VINYL
17. VENEER PLASTER OVER EXISTING PLASTER, SMOOTH FINISH
18. EXISTING ACOUSTIC FIBER BOARD
19. 12"x12" ACOUSTIC TILE OVER GYP BOARD.

FINISH

A. FACTORY
B. NONE
C. PAINT – GLOSS
D. PAINT – SEMI-GLOSS
E. INTEGRALLY COLORED
F. STAIN AND LACQUER
G. CLEAN AND PAINT
H. PAINT TO MATCH EXISTING ADJACENT SURFACE
J. CLEAN AND WAX

NO.	ROOM NAME	FLR. MAT.	FLR. FIN.	BASE MAT.	BASE FIN.	WALL NORTH MAT.	WALL NORTH FIN.	WALL EAST MAT.	WALL EAST FIN.	WALL SOUTH MAT.	WALL SOUTH FIN.	WALL WEST MAT.	WALL WEST FIN.	CEIL. MAT.	CEIL. FIN.	CEIL. HGT.	NO.	REMARKS
BUILDING A																		
17A1	STAGE	–	–	–	–	–	–	–	–	8	H	–	–	6	H	–	17A1	REFER TO FLOOR PLAN FOR EXTENT OF PAINT AT SOUTH WALL, PAINT ENTIRE CEILING
16A2	MULTI-PURPOSE	–	–	–	–	–	–	–	–	–	–	–	–	13	A	–	16A2	
22A3	HANDICAP LIFT	2	J	5	A	6 B D	6 B D	6 B D	6 B D	6	D	6	D	6	D	–	22A3	PROVIDE AND INSTALL VINYL TILE FLOORING AT TREADS AND LANDINGS
19A4	STORAGE	–	–	–	–	–	–	–	–	–	–	8	H	–	–	–	19A4	PAINT ENTIRE SOUTH WALL
19A5	MECHANICAL	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19A5	
19A6	JANITOR	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19A6	
19A7	STORAGE	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19A7	
19A8	WALK-IN REFRIGERATOR	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19A8	
13A9	KITCHEN	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	13A9	
14A10	DISHWASHING	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	14A10	
22A11	TEACHER'S DINING	E A		5	A	14	D	14	D	14	D	14	D	13	A	–	22A11	PAINT - GLOSS (E) WINDOW AND DOOR, JAMES, SILLS, TRIM
20A12	TOILET	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	20A12	
19A13	JANITOR	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19A13	
28A14	CORRIDOR	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	28A14	
BUILDING B																		
19B1	JANITOR	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19B1	
20B2	MEN	15	A	16	A	6	D	6 C B D	6 C B D	6	D	6	D	6	D	–	20B2	
22B3	TEACHER'S ROOM	–	–	–	–	–	–	–	–	–	–	6 7 H	6 7 H	10	A	–	22B3	REFER TO FLOOR PLAN FOR EXTENT OF PAINT AT WEST WALL
20B4	WOMEN	15	A	16	A	6	D	6	D	6 C B D	6 C B D	6 C B D	6 C B D	6	D	–	20B4	PAINT - GLOSS, (5) WINDOW AND DOOR, JAMB, SILLS, TRIM
22B5	REST	–	–	–	–	–	–	–	–	–	–	–	–	10	A	–	22B5	
22B6	REST	–	–	–	–	–	–	–	–	–	–	–	–	10	A	–	22B6	
19B7	BOOKS	–	–	–	–	–	–	–	–	–	–	–	–	10	A	–	22B7	
20B8	TOILET	–	–	–	–	–	–	–	–	–	–	–	–	6	H	–	20B8	
1B9	OFFICE	–	–	–	–	–	–	–	–	–	–	–	–	10	A	–	1B9	
1B10	CLERK	–	–	–	–	–	–	–	–	–	–	–	–	10	A	–	1B10	
19B11	STORAGE	–	–	–	–	–	–	–	–	–	–	–	–	10	A	–	19B11	
20B12	BATH	–	–	–	–	–	–	–	–	–	–	–	–	6	H	–	20B12	
1B13	NURSE	–	–	–	–	–	–	–	–	–	–	–	–	10	A	–	1B13	
19B14	STORAGE	15	A	16	A	17	D	8 17	D	17	D	17	D	6	G	–	19B14	
BUILDING C																		
20C1	BOYS	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	20C1	
20C2	GIRLS	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	20C2	
23C3	KINDERGARTEN	2 3 J	A	5	A	6 B D	–	9 6 B D	A D	– 9 6 B A D		– 9 6 B A D		6 B D	12 D		23C3	PAINT ENTIRE EXISTING, SCREEN PER ARCHITECTS DIRECTION. PAINT - (6)DOS, (8) WINDOW AND DOOR, JAMBS, SILLS, TRIM
19C4	STORAGE	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19C4	
BUILDING D																		
19D1	STORAGE	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19D1	
20D2	BOYS	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	20D2	
20D3	GIRLS	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	20D3	
1D4	WORK SPACE	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	1D4	
19D5	CLOSET	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19D5	
20D6	TOILET	–	–	–	–	–	–	–	–	–	–	–	–	–	H	–	20D6	
23D7	KINDERGARTEN	2 3 J	A	5	A	9	D	9	A D	9	A D	9	A D	10	A	8'-0"	23D7	PAINT - (6) (8) WINDOW DOOR JAMB SILLS TRIM
20D8	TOILET ALCOVE	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	20D8	
19D9	COAT STORAGE	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19D9	
BUILDING E																		
25aE1	CLASSROOM	2 3 J	A	5	A	9	A D	9	A D	9	A D	9	A D		A	(E)	25aE1	
22E2	WORK ROOM	2 3 J	A	5	A	14	D	9	A D	9	A D	9	A D		A	(E)	22E2	
20E3	GIRLS	1	A	4	A	1 6	D	1 6	A D	1 6	A D	1 6	A D	–	–	–	20E3	
19E4	STORAGE	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19E4	
19E5	JANITOR	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19E5	
20E6	TOILET	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	20E6	
19E7	STORAGE	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19E7	
1E8	CONFERENCE	3	A	5	A	B	D	G	D	6	D	B	D	19	A	8'-0"	1E8	LEVEL EXISTING CONC FLOOR WITH CONCRETE TOPPING
20E9	TOILET	1	A	4	A	1	A	1	A	1	A	1	A	7	D	8'-0"	20E9	SLOPE FLOORING TO FLOOR DRAIN
BUILDING F																		
22F1	WORK SPACE	2 3 J	A	5	A	9	A D	9	A D	9	A D	9	A D		A	(E)	22F1	
25aF2	LEARNING HANDICAPPED CLASSROOM	2 3 J	A	5	A	14	D	9	A D	9	A D	9	A D		A	(E)	25aF2	
25aF3	CLASSROOM	2 3 J	A	5	A	9	A D	9	A D	9	A D	9	A D		A	(E)	25aF3	
25aF4	CLASSROOM	2 3 J	A	5	A	14	D	9	A D	9	A D	9	A D		A	(E)	25aF4	
BUILDING G																		
25aG1	CLASSROOM	2 3 J	A	5	A	14	D	9	A D	9	A D	9	A D	10	A	8'-5" (E)	25aG1	
25aG2	CLASSROOM	2 3 J	A	5	A	14	D	9	A D	9	A D	9	A D	10	A	8'-5" (E)	25aG2	
25aG3	CLASSROOM	2 3 J	A	5	A	14	D	9	A D	9	A D	9	A D	10	A	8'-5" (E)	25aG3	
BUILDING H																		
15H1	LIBRARY	3	A	5	A	9	A D	9	A D	9	A D	9	A D		A	(E)	15H1	
25aH2	CLASSROOM	2 3 J	A	5	A	9	A D	9	A D	9	A D	9	A D		A	(E)	25aH2	
20H3	BOYS	1	A	4	A	1 6	D	1 6	A D	1 6	A D	1 6	A D	13	A	–	20H3	PAINT - GLOSS (5) WINDOW AND DOOR, JAMBS, SILLS, TRIM. PAINT 1 LF BLOCK PROJECTION AT WALL
19H4	STORAGE	2	J	5	A	B	D	B	D	6 B	D	6	D	7	D	8'-0"	19H4	

NO.	ROOM NAME	FLR. MAT.	FLR. FIN.	BASE MAT.	BASE FIN.	WALL NORTH MAT.	WALL NORTH FIN.	WALL EAST MAT.	WALL EAST FIN.	WALL SOUTH MAT.	WALL SOUTH FIN.	WALL WEST MAT.	WALL WEST FIN.	CEIL. MAT.	CEIL. FIN.	CEIL. HGT.	NO.	REMARKS
BUILDING J																		
25aJ1	CLASSROOM	2 3 J	A	5	A			9	A D	9	A D	9	A D	10	A	9'-8"	25aJ1	
25aJ2	CLASSROOM	2 3 J	A	5	A			9	A D	9	A D	9	A D	10	A	9'-8"	25aJ2	
25aJ3	CLASSROOM	2 3 J	A	5	A			9	A D	9	A D	9	A D	10	A	9'-8"	25aJ3	
BUILDING K																		
20K1	BOYS	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	20K1	
19K2	MECHANICAL	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19K2	
19K3	JANITOR	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	19K3	
20K4	GIRLS	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	20K4	
25aK5	CLASSROOM	2 3 J	A	5	A			9	A D	9	A D	9	A D	10	A	9'-8"	25aK5	
25aK6	CLASSROOM	2 3 J	A	5	A			9	A D	9	A D	9	A D	10	A	9'-8"	25aK6	

RRA
Architecture
Planning
Interior Design
Space Planning

Donald W. Renfro AIA C5283
Mark E. Russell AIA C13726
Carl G. Elliott AIA C7571
K. Bartram Huffman AIA C12061
Kenneth A. Kalla AIA C17760
Jeffrey P. Krausse AIA C16834
Tommy W. Preston AIA C12263
Larry G. Wiggins AIA C12514

Renfro-Russell & Associates, Inc.
4800 Stockdale Highway, Suite 304, Bakersfield, California 93309 (805) 327-7075

CONSULTANTS

PROJECT

BAKERSFIELD CITY SCHOOL DISTRICT

FRANKLIN ELEMENTARY SCHOOL MODERNIZATION

THE ABOVE DRAWINGS AND SPECIFICATIONS AND IDEAS, DESIGNS AND ARRANGEMENTS REPRESENTED THEREBY ARE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT AND NO PART THEREOF SHALL BE COPIED, DISCLOSED TO OTHERS OR USED IN CONNECTION WITH ANY WORK OR PROJECT OTHER THAN THE SPECIFIC PROJECT FOR WHICH THEY HAVE BEEN PREPARED AND DEVELOPED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT. VISUAL CONTACT WITH THESE DRAWINGS OR SPECIFICATIONS SHALL CONSTITUTE CONCLUSIVE EVIDENCE OF ACCEPTANCE OF THESE RESTRICTIONS.

WRITTEN DIMENSIONS ON THESE DRAWINGS SHALL HAVE PRECEDENCE OVER SCALED DIMENSION. CONTRACTORS SHALL VERIFY, AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS ON THE JOB AND THIS OFFICE MUST BE NOTIFIED OF ANY VARIATIONS FROM THE DIMENSIONS AND CONDITIONS SHOWN BY THESE DRAWINGS. SHOP DETAILS MUST BE SUBMITTED TO THIS OFFICE FOR APPROVAL BEFORE PROCEEDING WITH FABRICATION.

KEY PLAN

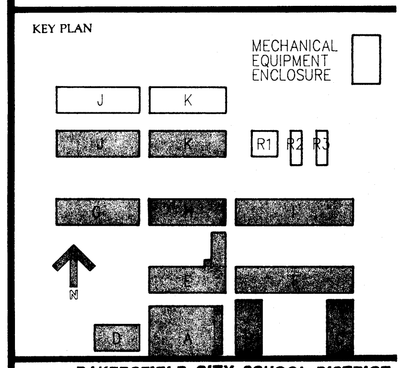

BAKERSFIELD CITY SCHOOL DISTRICT
BOARD OF EDUCATION

DATE	APPROVED

DATE	ISSUED FOR
9-3-91	BIDDING

DATE	REVISIONS

SHEET TITLE

ROOM FINISH SCHEDULE

APPROVED/ ARCHITECT Tommy W. Preston
CHECKED
DRAWN BY TWP RSS
DATE 8-1-89
PROJECT NO. 86-216FK

SHEET NUMBER
86216CA81A96
A-8
OF 18 SHEETS