## SCHEDULE OF ROOM FINISHES

| No. | Room | Floor | Base | Wainscot | Walls | Ceiling | Trim | Notes |
|---|---|---|---|---|---|---|---|---|
| 1 to 12, 13 | Class Rooms, Kindergarten | Sub Floor, ½ Plywood, Linoleum | Oregon Pine | 6-8 Hard Wall S.F. Plaster See C.R. Detail | Acoustic Fibre Board Natural | Acoustic Fibre Board Natural | Oregon Pine For Fin. [illegible] | See Sheet # [illegible] For Class Room Details |
| 15 & 19, 14 & 13B | Boys & Girls Toilet Room | Colored Concrete | 6" Cement | ✓ | ✓ | ✓ | ✓ | |
| 18 | Custodian | ✓ | ✓ | Unfinished Painted | Unfinished Painted | Metal Lath & S.F. Plaster Painted | ✓ | |
| 16 | Equip. Room | ✓ | ✓ | Hard Wall S.F. Plaster Painted | Hard Wall S.F. Plaster Painted | ✓ | ✓ | |
| 17 | Toilet Room | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| 20 | Kitchen | Sub Floor ½ Plywood Linoleum | Oregon Pine | Hard Wall Smooth Plas. Painted | Hard Wall Smooth Plas. Painted | Hard Wall Smooth Plas. Painted | ✓ | |
| 21-21A | Storage | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| 22 | Cafeteria | ✓ | ✓ | 6-8 Hard Wall S.F. Plaster Painted | Acoustic Fibre Board Natural | Acoustic Fibre Board Natural | ✓ | |
| 24 | Teachers Room | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| 27 | Rest | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| 29 | Rest | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| 28 | Nurse | ✓ | ✓ | ✓ | ✓ | ✓ | | Work Table & Cupboards See Detail |
| 33 | Clerk | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | Counter See Detail |
| 34 | Office | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| 23 | J.C. | ✓ | 6" Cove Lino | Hard Wall Smooth Plas Painted | Hard Wall Smooth Plas Painted | Hard Wall Smooth Plas Painted | ✓ | Furr Ceiling Down To 8'0" |
| 25 | Toilet Rm | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| 26 & 30 | Bath Rms | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | Shower – Tile Floor, 8 Curb At Door, 6'0" Tile Wainscot. |
| 32 | Toilet Rm | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | Closets | ✓ | Oregon Pine | Hard Wall S.F. Plaster Painted | Hard Wall S.F. Plaster Painted | Hard Wall S.F. Plaster Painted | ✓ | Furr Ceiling Down To 8'0" |
| | Corridor | Concrete | 6" Cement | Stucco | Dash Coat | Unfinished Painted | | Plaster Ceiling S.F. Painted New Corr. From Front To Rear of Boys Toilet Room Between Caf. & C.R. # 9 & 10 Between Adm. & C.R. # 11 Between Cust. Rm. & Boys Toilet Corridor East of Kindergarten |
| 22A | Platform | 1" x Subfloor 25/32" Maple | Oregon Pine | Sand Fin. Plas. Paint. | Sand Fin. Plas. Paint. | Sand Fin. Plas. Paint. | | |
| 31 | Books & Supply | Same as Supply 14, 21, & 21A | | | | | | |

PLOT PLAN
Scale 1"=60'

Note! Sidewalks shown shaded in on plot plan are part of this contract. All new curbs as shown are part of this contract. The removal of curbs & pavement on 17th St. is part of this contract.

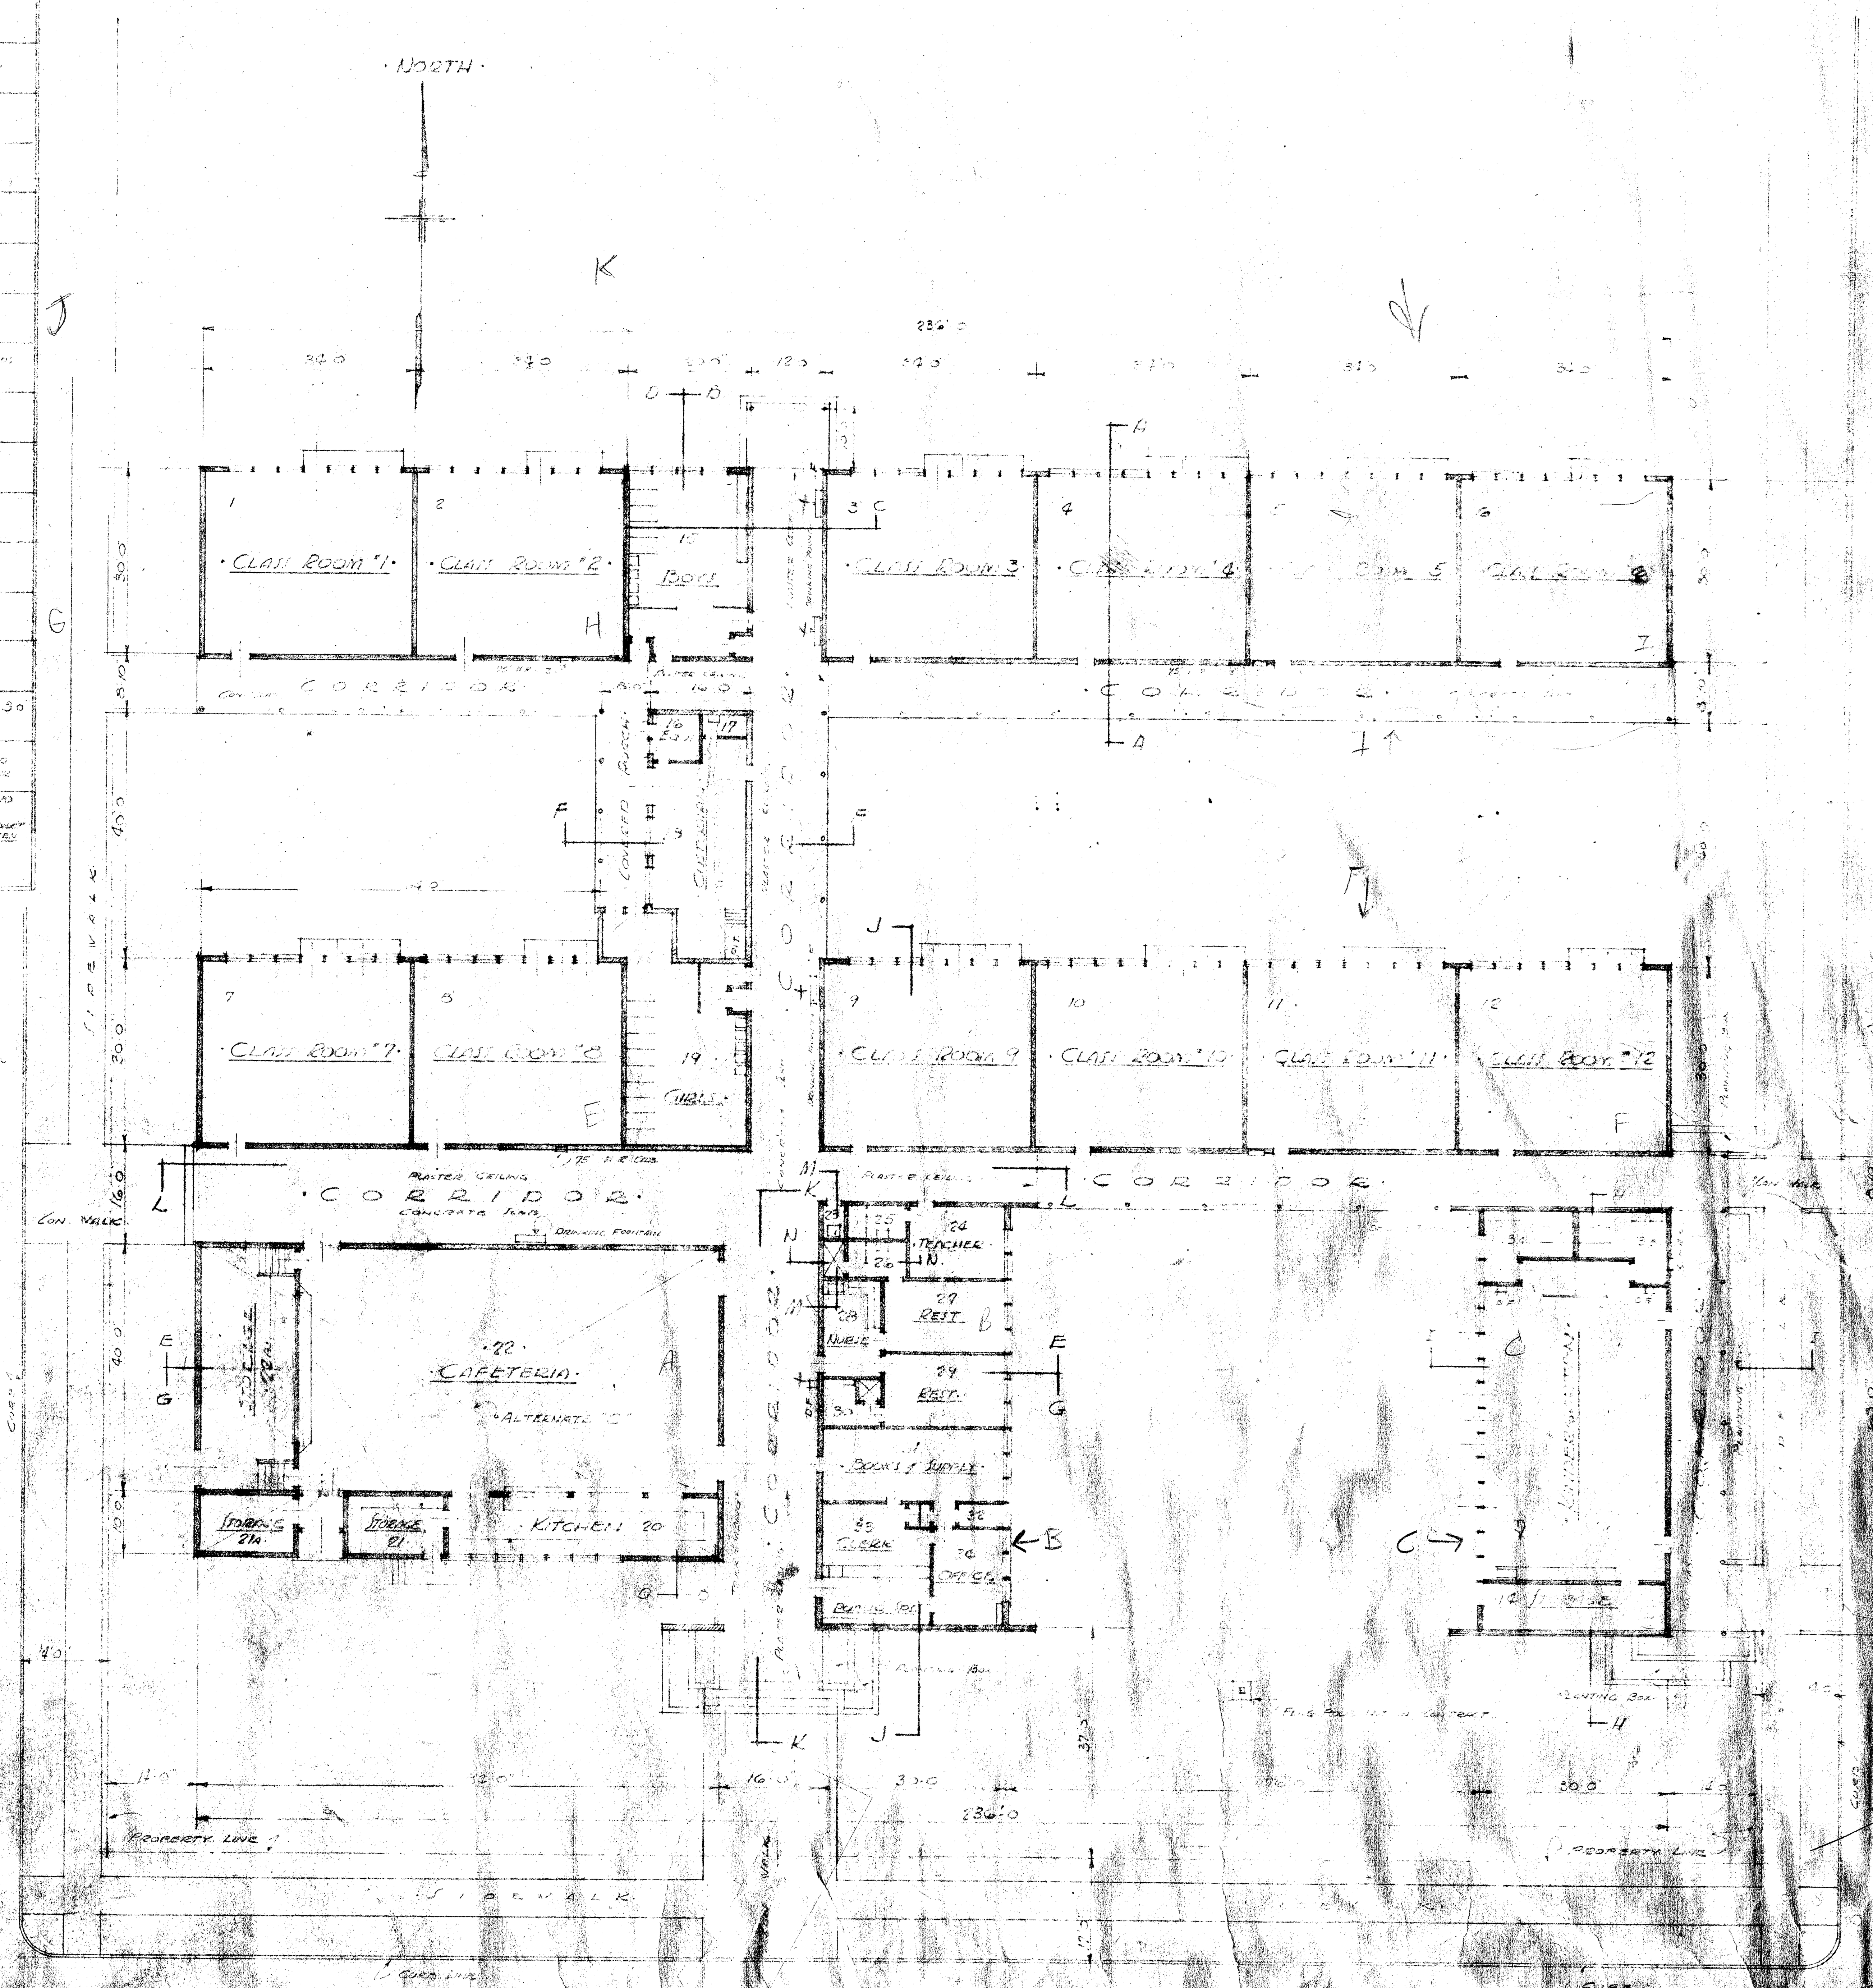


TRUXTUN AVE.
KEY PLAN
Scale 1/40"=1'-0"

Approved Jan. 14 Board of Education

CHARLES H. BIGGAR, A.I.A.
ARCHITECT
BARTON ALFORD, ARCH.
ASSOCIATE.
BAKERSFIELD, CALIFORNIA