


CONCRETE SLAB
ELEVATED AND SLAB-ON-GRADE
FOUR (4) INCH THICK CONCRETE SLAB OF 2 INCHES SAND OR CLEAN FILL COMPACTED TO 90 % (SAND NOT REQUIRED AT SLAB-ON-GRADE) REINFORCE CONCRETE WITH BARS AT 24 INCHES EA WAY - KEYD IN BRUSH FINISH



PRIOR TO PLACING CONCRETE REMOVE WHITE BASE IN THE FOLLOWING MANNER:
REMOVE ALL FOREIGN WATER, OILS, RUDS OR OTHER DESTRUCTIVE MATERIALS.
SCAFFRY THE SOIL TO A DEPTH OF SIX (6) INCHES BELOW BOTTOM OF CONCRETE.
COMPACT THE BASE TO MINIMUM OF 90%. OWNER MAY ELECT TO HAVE BASE TESTED BY INDEPENDENT LAB. COSTS OF TESTING TO BE BY OWNER.

COLORB'D / STAMPED BRICK PATTERN
CONSTRUCT COLORB'D STAMPED CONCRETE IN BRICK PATTERN COLOR TO MATCH EXISTING BUILDING BRICK VENEER. SIZE 2 INCHES LONG X 4 INCHES WIDE. FINISH OF STAMPED CONCRETE TO BE FLUSH WITH CONCRETE SLAB ON GRADE.

BRICK VENEER
MATCH EXISTING VENEER ON WALLS.
COLOR: BUFF - SEVENT SAMPLES FOR OWNER APPROVAL.
SIZE: 9 1/4 INCHES X 4 INCHES X 2 1/4 INCHES

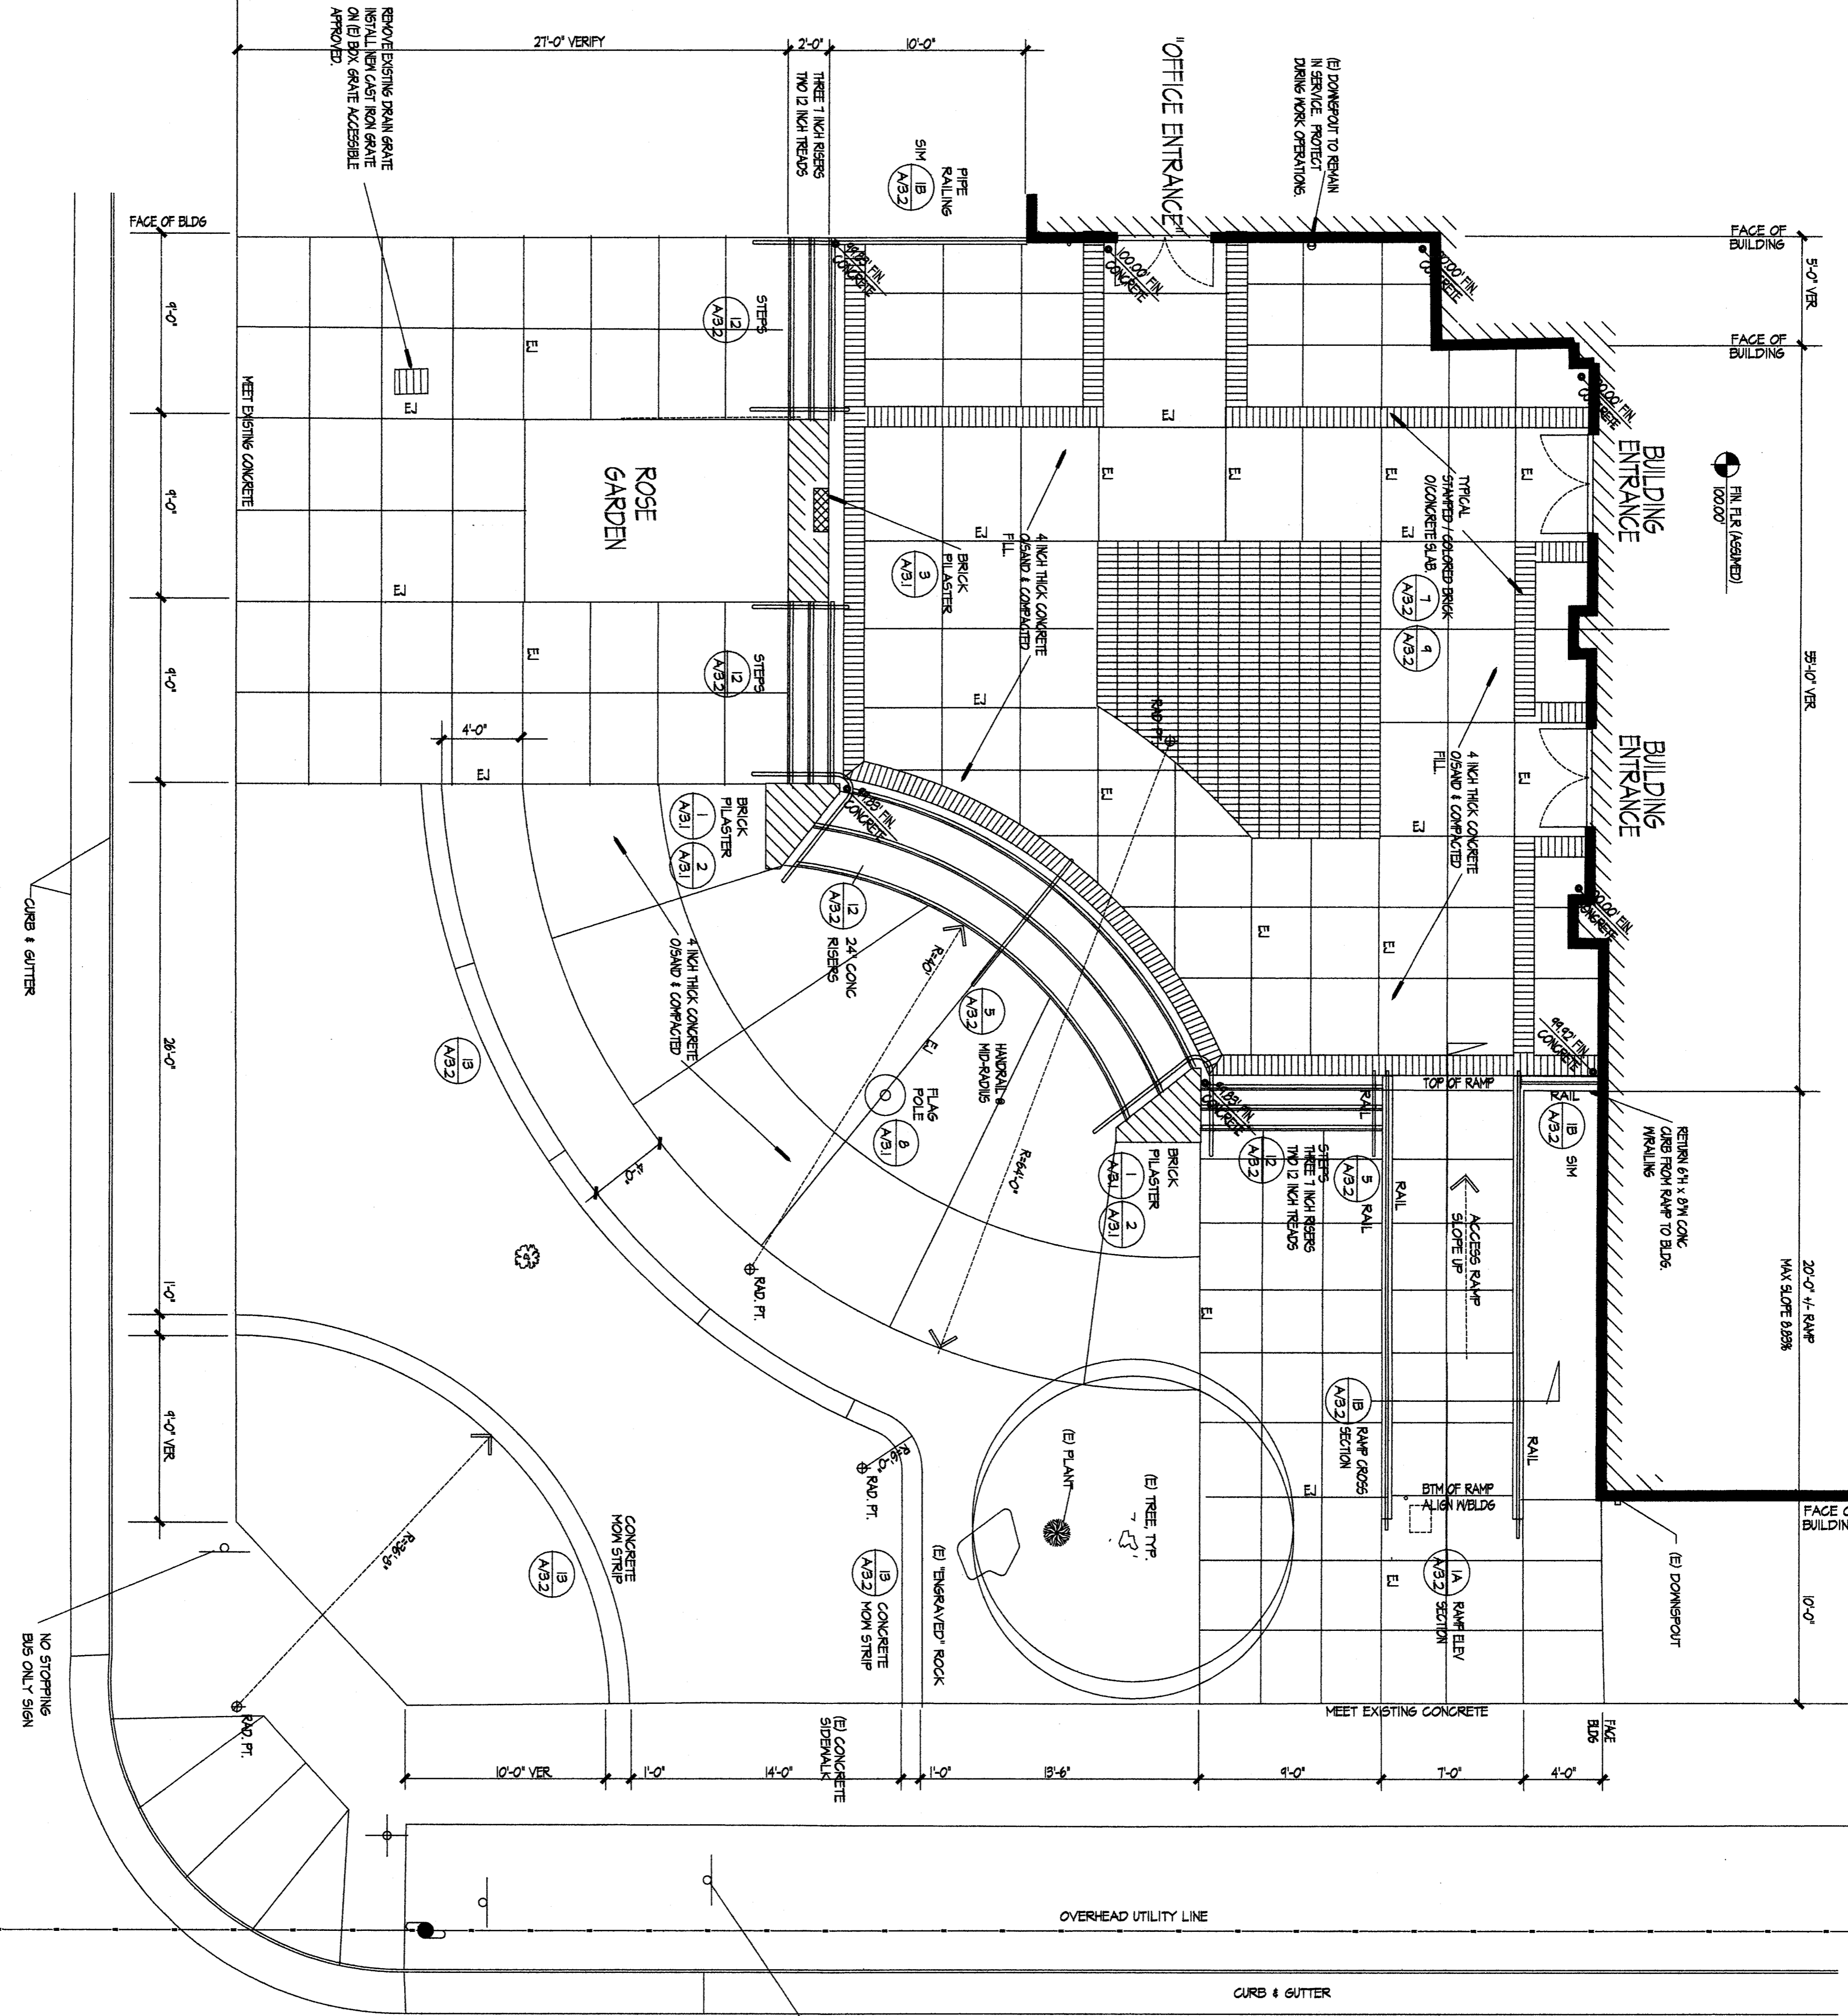


ROOSEVELT SCHOOL - DETAIL PLAN
RECONSTRUCTION OF ENTRY WALKS AND RAMPS

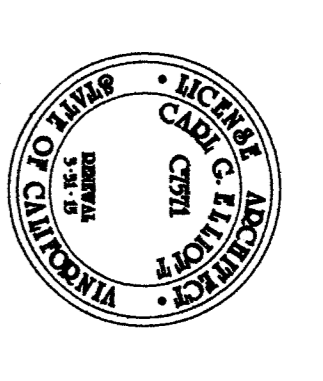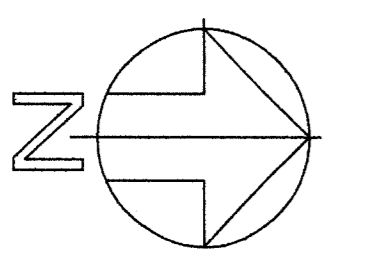

CARL G. ELLIOTT
ARCHITECT NCARB CERTIFIED

5118 Bourdell Court
Bakersfield, California, 93308
Tel: 661.392.1089 Fax: 661.392.1089

Project:
BAKERSFIELD
CITY SCHOOL DISTRICT

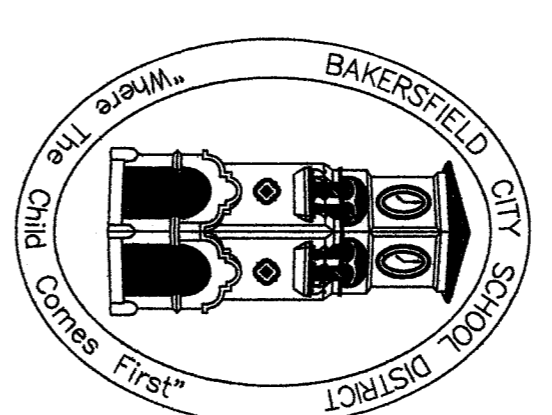

**RECONSTRUCTION OF
ENTRY WALKS & RAMPS**
ROOSEVELT SCHOOL
2324 Verde Street
Bakersfield, California

EXAMINEE'S REPRESENTATION AND ENDORSEMENT ARE LIMITED TO THE WORK SHOWN ON THESE PLANS. ANY OTHER WORK NOT SHOWN ON THESE PLANS IS NOT GUARANTEED, WARRANTED, OR ENDORSED BY THE ARCHITECT. THE ARCHITECT'S RESPONSIBILITY IS LIMITED TO THE WORK SHOWN ON THESE PLANS. THE ARCHITECT DOES NOT REPRESENT OR ENDORSE THE QUALITY OF MATERIALS OR THE WORKMANSHIP OF ANY CONTRACTOR. THE ARCHITECT'S RESPONSIBILITY IS LIMITED TO THE WORK SHOWN ON THESE PLANS. THE ARCHITECT DOES NOT REPRESENT OR ENDORSE THE QUALITY OF MATERIALS OR THE WORKMANSHIP OF ANY CONTRACTOR. THE ARCHITECT'S RESPONSIBILITY IS LIMITED TO THE WORK SHOWN ON THESE PLANS.

Date	Approved

Sheet Title
DETAILED PLAN

Approved / Architect: _____ Date: 07/07/18
Checked: _____ Drawn By: Job No. 18-218

Sheet Number: A/2.1
Of Five Sheets