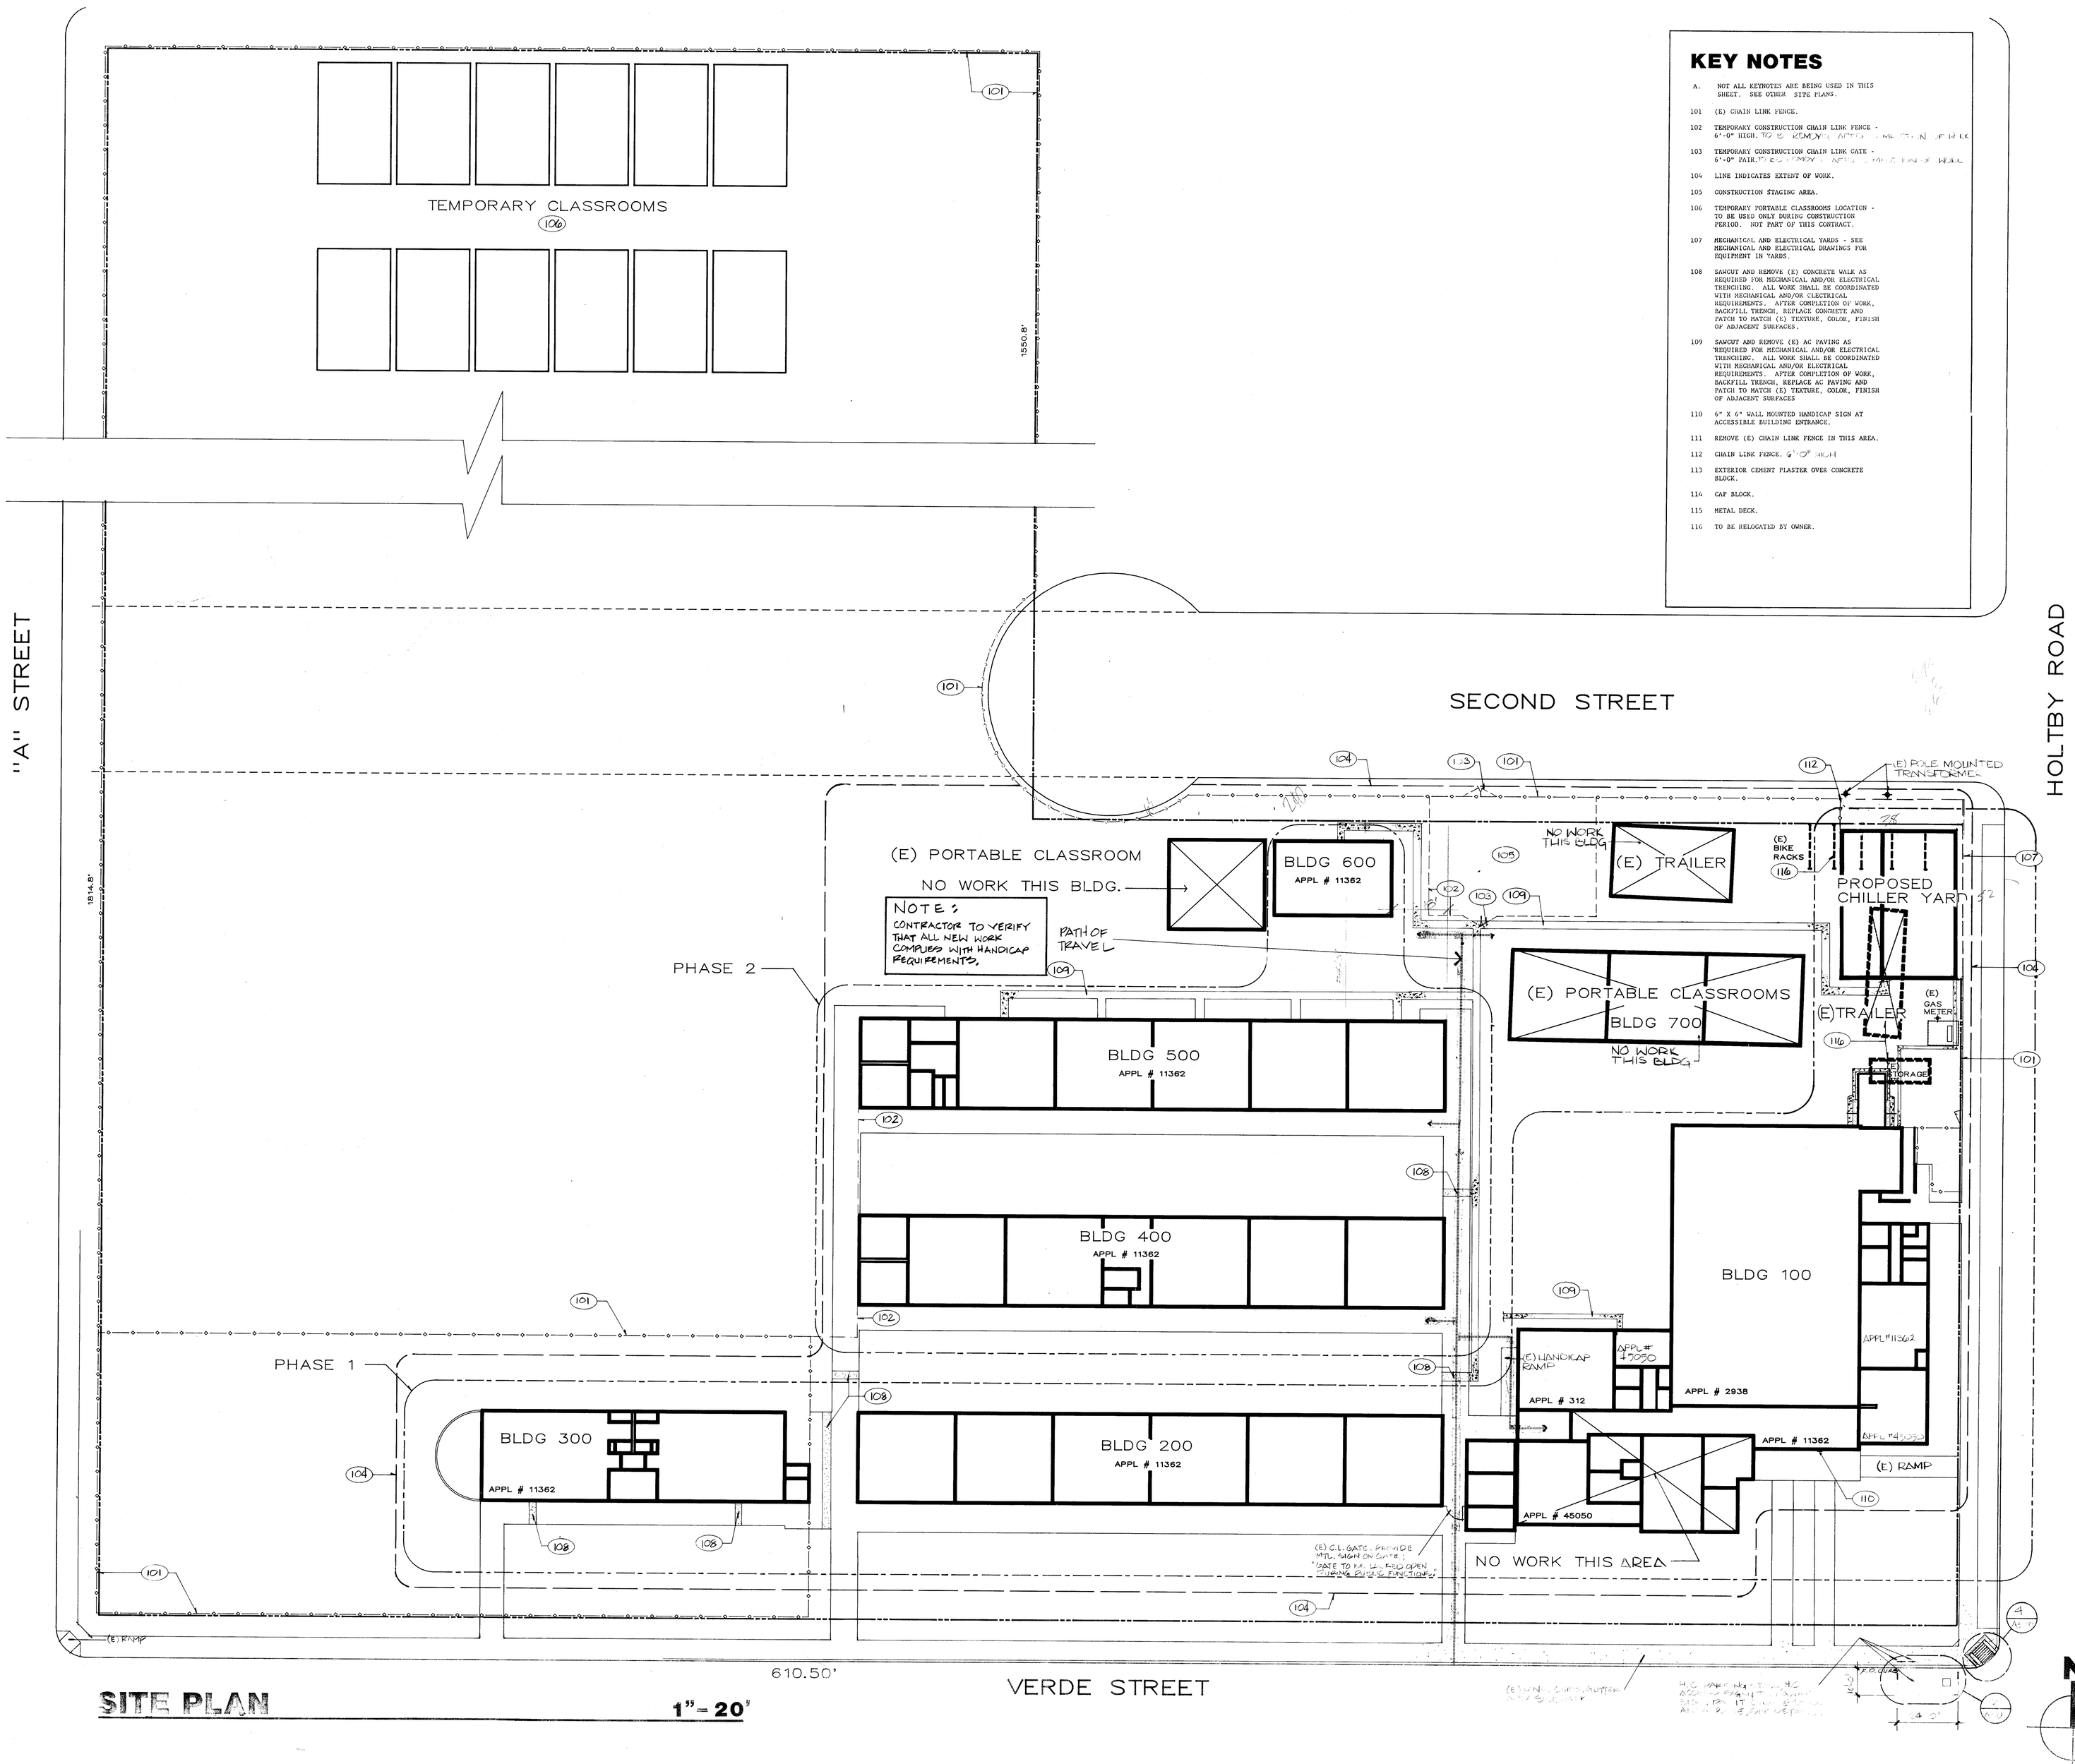

SITE PLAN 1" = 20'

KEY NOTES

A. NOT ALL KEYNOTES ARE BEING USED IN THIS SHEET. SEE OTHER SITE PLANS.

101 (E) CHAIN LINK FENCE.

102 TEMPORARY CONSTRUCTION CHAIN LINK FENCE - 6'-0" HIGH. TO BE REMOVED AFTER COMPLETION OF WORK

103 TEMPORARY CONSTRUCTION CHAIN LINK GATE - 6'-0" PAIR. TO BE REMOVED AFTER COMPLETION OF WORK

104 LINE INDICATES EXTENT OF WORK.

105 CONSTRUCTION STAGING AREA.

106 TEMPORARY PORTABLE CLASSROOMS LOCATION - TO BE USED ONLY DURING CONSTRUCTION PERIOD. NOT PART OF THIS CONTRACT.

107 MECHANICAL AND ELECTRICAL YARDS - SEE MECHANICAL AND ELECTRICAL DRAWINGS FOR EQUIPMENT IN YARDS.

108 SAWCUT AND REMOVE (E) CONCRETE WALK AS REQUIRED FOR MECHANICAL AND/OR ELECTRICAL TRENCHING. ALL WORK SHALL BE COORDINATED WITH MECHANICAL AND/OR ELECTRICAL REQUIREMENTS. AFTER COMPLETION OF WORK, BACKFILL TRENCH, REPLACE CONCRETE AND PATCH TO MATCH (E) TEXTURE, COLOR, FINISH OF ADJACENT SURFACES

109 SAWCUT AND REMOVE (E) AC PAVING AS REQUIRED FOR MECHANICAL AND/OR ELECTRICAL TRENCHING. ALL WORK SHALL BE COORDINATED WITH MECHANICAL AND/OR ELECTRICAL REQUIREMENTS. AFTER COMPLETION OF WORK, BACKFILL TRENCH, REPLACE AC PAVING AND PATCH TO MATCH (E) TEXTURE, COLOR, FINISH OF ADJACENT SURFACES

110 6" X 6" WALL MOUNTED HANDICAP SIGN AT ACCESSIBLE BUILDING ENTRANCE.

111 REMOVE (E) CHAIN LINK FENCE IN THIS AREA.

112 CHAIN LINK FENCE. 6'-0" HIGH

113 EXTERIOR CEMENT PLASTER OVER CONCRETE BLOCK.

114 CAP BLOCK.

115 METAL DECK.

116 TO BE RELOCATED BY OWNER.

bfgc

ROOSEVELT SCHOOL MODERNIZATION

FOR

BAKERSFIELD CITY SCHOOL DISTRICT

SITE PLAN

bfgc architects planners inc.
p.o. box 9698 bakersfield california 93389-9698
31 south real road 93309 (805) 832 6122
C-3132 C-6564 C-8021 C-8702

job no.	88-142
date	20 JAN 1989
drawn by	T. WARREN
chk'd by	SCOTT
copyright	1989

A 1.00