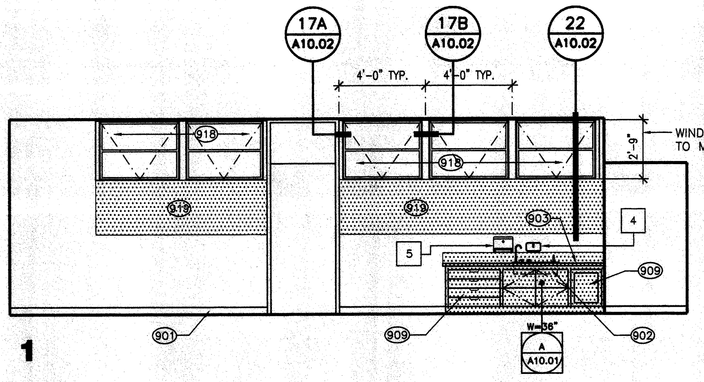

1

401 - LIBRARY

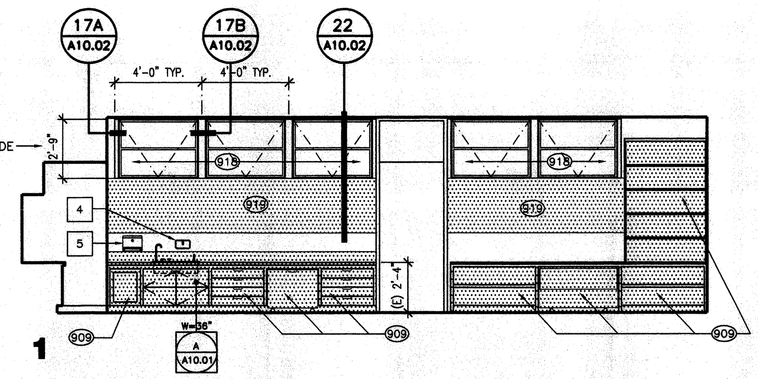

1

402 / 403 / 404 / 405 - CLASSROOM TYPE 'A'

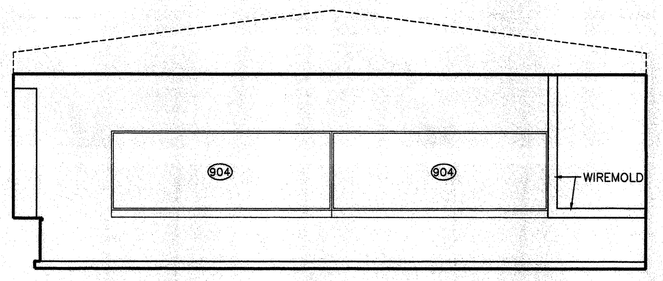

2

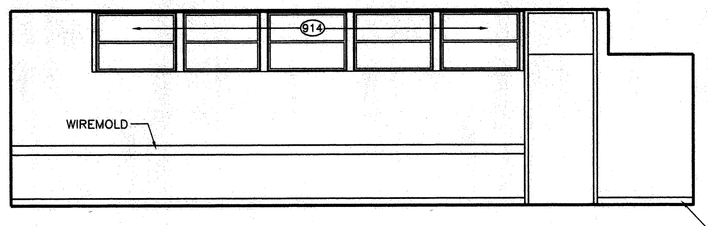

3

402 / 403 / 404 / 405 - CLASSROOM TYPE 'A'

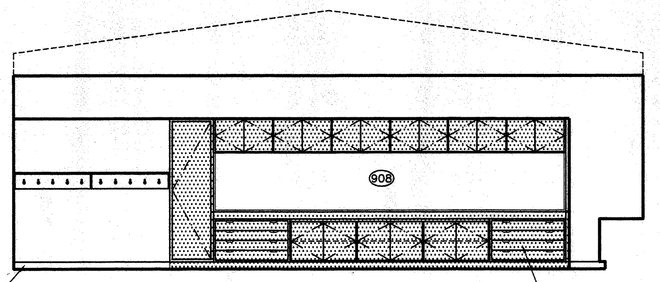

4

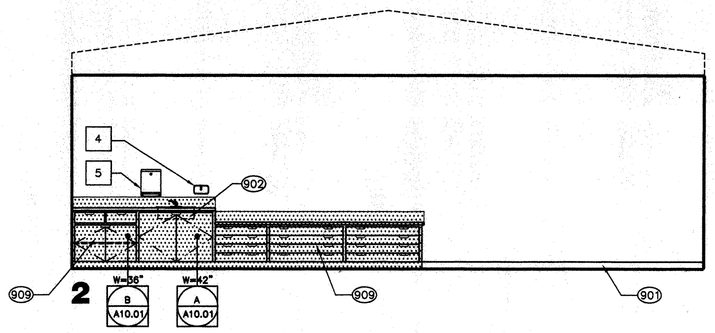

2

406 - TEACHER'S WORKROOM

BUILDING 400 INTERIOR ELEVATIONS

0 2 4 8

1 / 4 2 / 3



1



PARTIAL OF 1

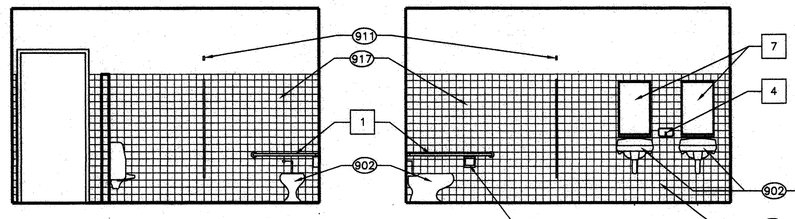

2 3

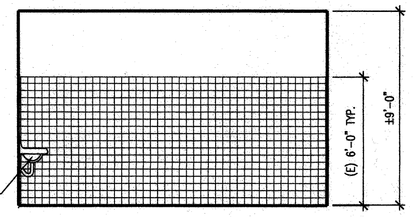

4

501 BOY'S TOILET

USE ADULT OR KINDERGARTEN MOUNTING HEIGHTS FOR TOILET ROOM FIXTURES AND ACCESSORIES REFER TO DET. 1 SHEET A10.02

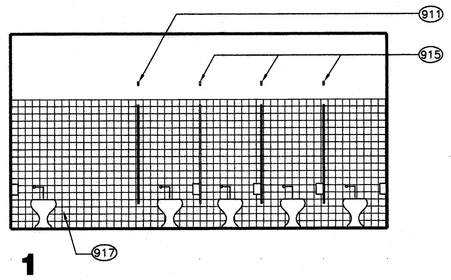

1



2

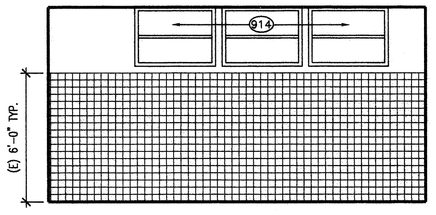

3



PARTIAL OF 3

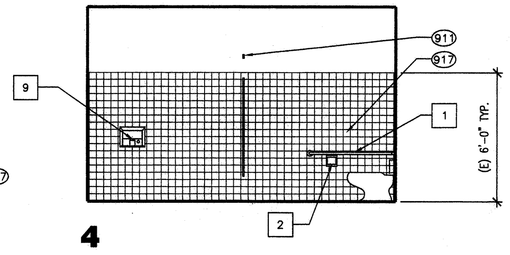

4

505 GIRL'S TOILET

USE ADULT OR KINDERGARTEN MOUNTING HEIGHTS FOR TOILET ROOM FIXTURES AND ACCESSORIES REFER TO DET. 1 SHEET A10.02

BUILDING 500 INTERIOR ELEVATIONS

0 2 4 8

1 / 4 2 / 3

GENERAL NOTES

1. REFER TO ROOM FINISH SCHEDULE (SHT A5.11) FOR ADDITIONAL NOTES AND INFORMATION.
2. CONTRACTOR SHALL FIELD VERIFY CASEWORK DIMENSIONS BEFORE ORDERING NEW CASEWORK.

KEYNOTES

NOTE: KEYNOTES IN THIS LIST MAY NOT NECESSARILY OCCUR ON THIS SHEET.

901 BASE. REFER TO FINISH SCHEDULE.
902 PLUMBING FIXTURE. REFER TO PLUMBING DRAWINGS.
903 PROVIDE COUNTERTOP AND 6" BACKSPLASH U.O.N.
904 PROVIDE MARKERBOARD. ~~REFER TO DETAIL V/A10.02~~
905 PROVIDE BRACKET MOUNTED FIRE EXTINGUISHER. 2A:10B:C WITH VALID CERTIFICATION ATTACHED.
906 PROVIDE D.F. BARRIER RAIL 1'-0" EITHER SIDE OF PLUMBING FIXTURE. REFER TO DETAIL 24/A10.02
907 (E) EASLE TO REMAIN.
908 PROVIDE CLOSURE PANEL WHERE EASLE REMOVED. REFER TO DETAIL 23/A10.02
909 REFURBISH (E) CABINETS. REFER TO SPECS
910 PROVIDE TILE BEHIND MIRROR.
911. PROVIDE TOILET PARTITION. REFER TO DETAILS 12/A10.02 & 18/A10.02.
912. (E) TACKBOARD TO REMAIN.
913. (E) PLUMBING FIXTURE TO REMAIN.
914. (E) WINDOW TO REMAIN.
915. (E) TOILET PARTITION TO REMAIN.
916. REMOVE (E) EASLE. PATCH WALL BEHIND TO MATCH (E) ADJACENT.
917. PATCH AND REPAIR (E) CERAMIC TILE WAINSCOT TO MATCH (E) ADJACENT WHERE REMODEL OCCURS.
918. PROVIDE WINDOWS.
919. WINDOW INFILL. PROVIDE WALL FINISH TO MATCH (E) ADJACENT.
920. (E) FIRE HYDRANT/CABINET TO REMAIN.

MATERIAL LEGEND

NOTE: ALL SYMBOLS AND PATTERNS MAY NOT NECESSARILY OCCUR ON THIS SHEET.

- SCOPE OF WORK
- (E) WALL FINISH ENAMEL PAINT U.O.N.
- CERAMIC TILE
- GYPSUM OR PLASTER FINISH

ACCESSORY LEGEND

NOTE: ACCESSORIES IN THIS LIST MAY NOT NECESSARILY OCCUR ON THIS SHEET

1 STAINLESS STEEL GRAB BAR. ATTACH PER DETAIL 11/A10.02.
2 SEMI-RECESSED TOILET TISSUE DISPENSER. OWNER FURNISHED, CONTRACTOR INSTALLED.
3 STAINLESS STEEL FRAMED MIRROR WITH SHELF.
4 SURFACE MOUNTED LIQUID SOAP DISPENSER.
5 SURFACE MOUNTED PAPER TOWEL DISPENSER.
6 SURFACE MOUNTED TOILET-SEAT-COVER DISPENSER.
7 SURFACE MOUNTED FRAMED MIRROR.
8 RECESSED FEMININE NAPKIN DISPOSAL.
9 ELECTRIC HAND DRYER.

NOTE: REFER TO DETAILS 1/A10.02 & 4/A10.02 FOR MOUNTING HEIGHTS AND LOCATIONS

bfgc Architecture

Bakersfield
5500 ming avenue, suite 450, bakersfield, ca 93309
661.836.4300 fax 661.836.4311

San Jose
150 south first st., suite 200
san jose, california 95113
408.924.0841
fax 408.924.0844

San Luis Obispo
4115 broad street, suite b-6
san luis obispo, ca 93401
805.546.0433
fax 805.546.0504

Oakland
350 frank ogawa plaza., suite 300
oakland, california 94612
510.891.0670
fax 510.891.0674

Principal Architects
david r. cortrel, f.a.i.a., C-8564 — dean o. tatsuno, a.i.a., C- 9190
frank a. ghezzi, a.i.a., C-3132 — bruce m. biggar, a.i.a., C-23134
mark engelen, a.i.a., C-8021 — brad henderson, a.i.a., C-10901
william r. tuculet, a.i.a., C-8702 — richard l. mello, a.i.a., C-18079

REGISTERED ARCHITECT STATE OF CALIFORNIA

FILE NO: 15-6

IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
APPL NO: 01-106663
AC. BY FLS. 2/ SS. K2
DATE 06-24-03

MODERNIZATION

FOR

HENRY EISSLER SCHOOL
2901 EISSLER STREET
BAKERSFIELD, CA 93306

BAKERSFIELD CITY SCHOOL DISTRICT

BUILDINGS 400, 500 INTERIOR ELEVATIONS

Version Date:	
job no.	02-126
date	6-24-03
drawn by	D.HERRERA
chk'd by	R.EDWARDS
©copyright	2003

Version time:

A
9.41