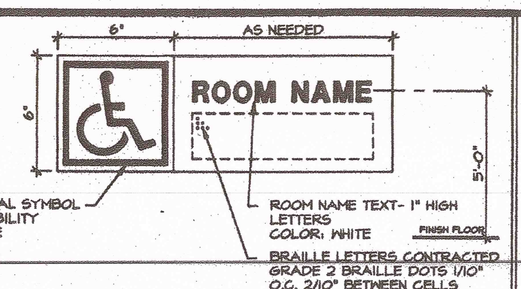

NOTE: PROVIDE ONE SIGN WHERE INDICATED ON PLANS LOCATE SIGN MAX. 12" AWAY FROM DOOR STRIKE SIDE.

NOTE: SIGN MATERIAL TO BE 1/8" THICK ES PLASTIC, W/ 1/32" RAISED BORDER, GRAPHICS AND LETTERS PROVIDE MECH. MOUNTING W/ VANDAL RESISTANT FASTENERS.

HANDICAP ROOM SIGN — 16

TO BE BLUE BACKGROUND W/ WHITE LETTERS

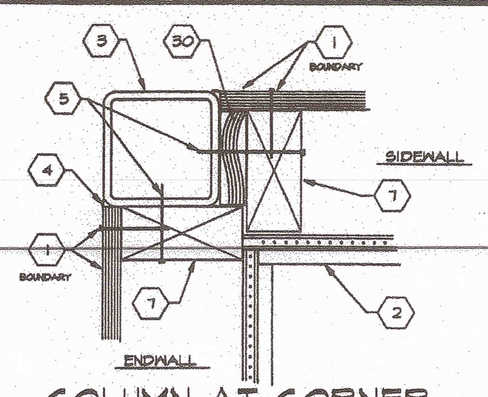

COLUMN AT CORNER — 11

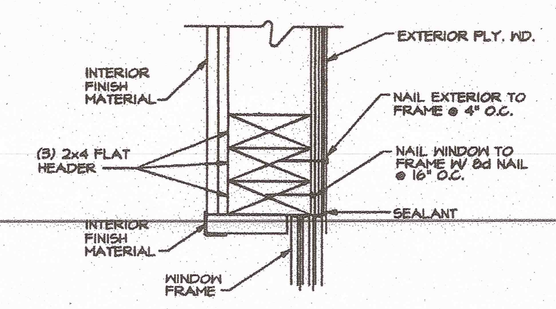

WINDOW HEADER — 6

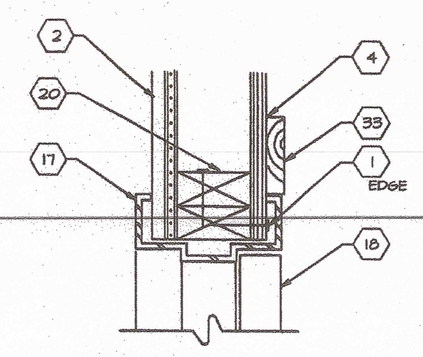

DOOR HEAD — 1

KEYNOTES

1. EXTERIOR PLYWOOD SIDING/SHEATHING - NAIL W/ CORROSION RESISTANT 8d BOX NAILS @ 6" O.C. BOUNDARY & EDGES, AND 12" O.C. FIELD. WITH MOISTURE BARRIER SEE SHEET 9 FOR MATERIAL.
2. TYPICAL INTERIOR FINISH - SEE SHEET 9 FOR MATERIAL
3. STEEL TUBE COLUMN - SEE SHEET 5
4. SEALANT
5. 'HILTI' DN57-PB OR 'RAMSET' 1514 SD @ 24" O.C.
6. 2x4 TRIMMER
7. 2x4 FULL HEIGHT STUDS
8. 2x4 TOP PLATE
9. 2x4 BOTTOM PLATE
10. ROOF SHEATHING - SEE SHEET 5.
11. FLOOR SHEATHING - SEE SHEET 5.
12. GALVANIZED METAL FLASHING
13. 16d BOX NAILS @ 16" O.C.
14. NOT USED
15. STEEL FLOOR CHANNEL - SEE SHEET 5
16. STEEL JOIST - SEE SHEET 5
17. HOLLOW METAL DOOR FRAME
18. METAL DOOR
19. NOT USED
20. HEADER - (2) 2x4 # 1 FLAT
21. DOOR BOTTOM WITH WEATHER STRIP
22. ALUMINUM THRESHOLD
23. WALL MOUNTED A/C
24. 4x4 D.F # 2 & BETTER POST
25. 2x6 BLOCK BETWEEN STUDS. ATTACH TO STUDS W/ (2) 16d BOX NAILS EACH END OF BLOCKS INTO STUD
26. NOT USED.
27. 11 Ga x 24" LONG STEEL BOTTOM BRACKET
28. NOT USED.
29. 3/8" DIA. x 2-1/2" LAG BOLTS, QNTY AS INDICATED BY PRE DRILLED HOLES ON UNIT.
30. 3/4" x SPACER
31. NOT USED
32. NOT USED
33. 1x4 TRIM
34. NOT USED
35. NOT USED
36. NOT USED
37. VINYL WRAPPED CLOSE OFF BATT. ATTACH W/ #8x 2-1/4" PAN HEAD WOOD SCREWS STAGGERED 24" O.C. & (2) SCREWS TOP AND BOTTOM.
38. NOT USED
39. 4 4"x 3"x 3/8" @ PERIM. OF OVERHANG.
40. NOT USED
41. 26 Ga GUTTER - SEE ROOF PLAN FOR LOCATION

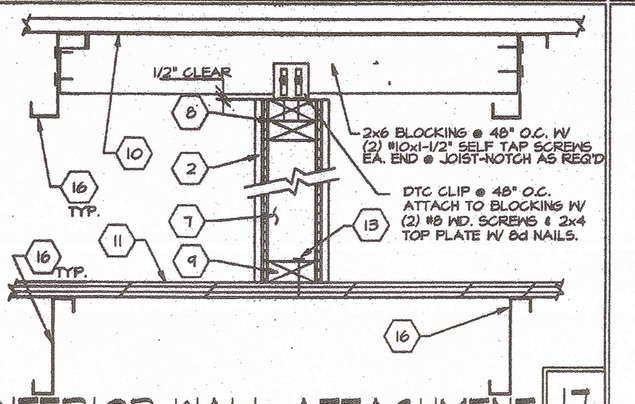

INTERIOR WALL ATTACHMENT — 17

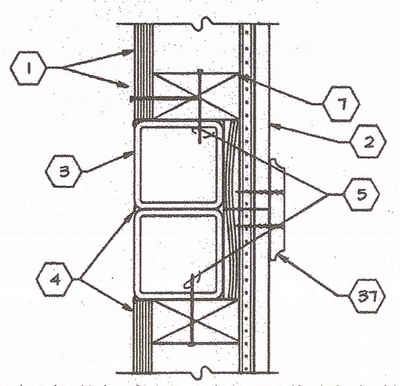

COLUMN AT MODULE LINE — 12

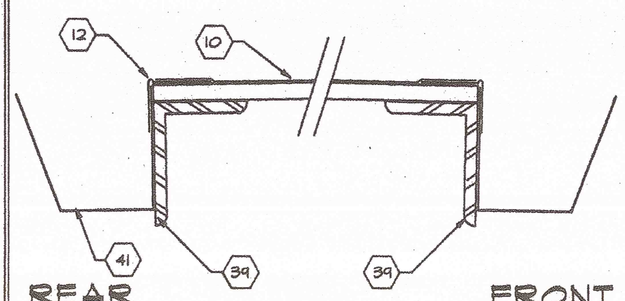

FASCIA — 7

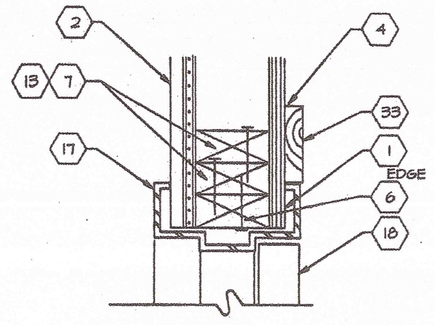

DOOR JAMB — 2

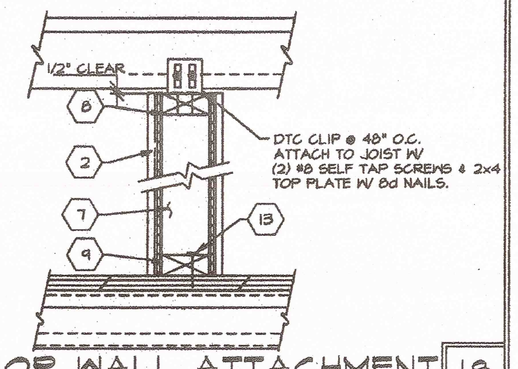

INTERIOR WALL ATTACHMENT — 18

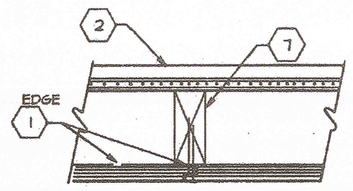

PANEL JOINT — 13

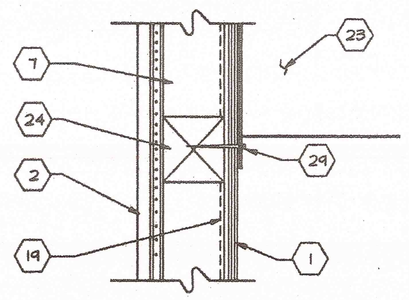

A/C @ SIDE — 8

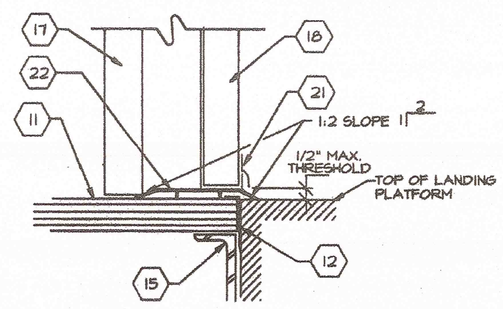

THRESHOLD — 3

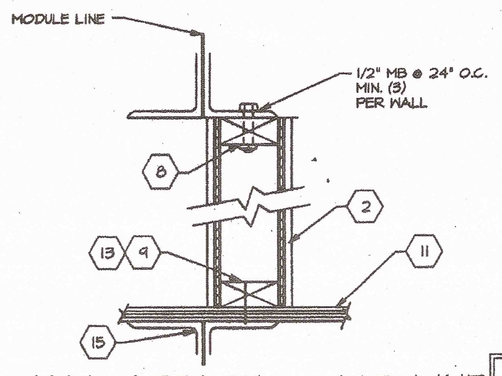

INT. WALL ATTACH @ MOD LINE — 19

14

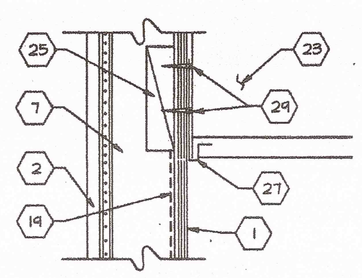

A/C @ BOTTOM — 9

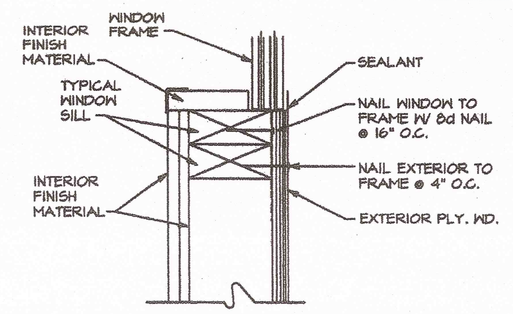

WINDOW SILL — 4

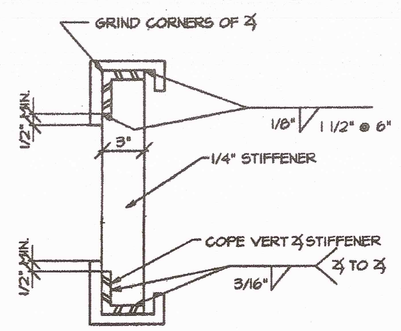

A/C OPENING IN HEADER — 20

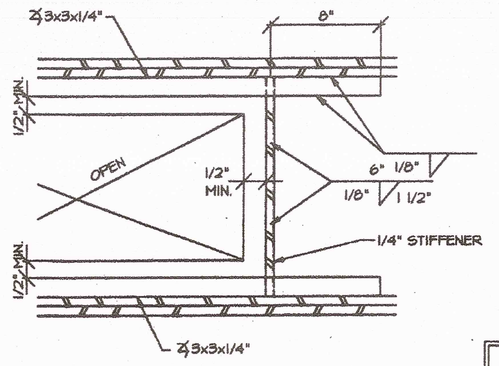

A/C OPENING IN HEADER — 15

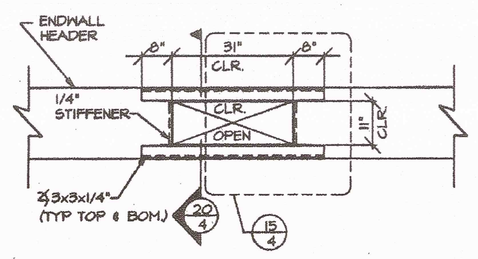

A/C OPENING IN HEADER — 10

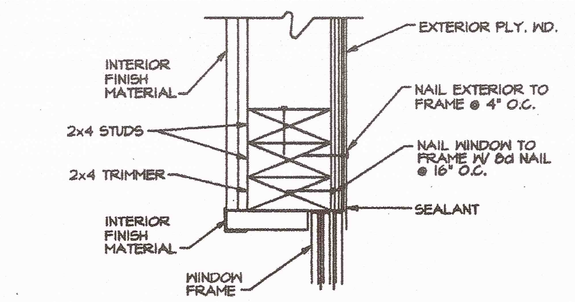

WINDOW JAMB — 5

D.S.A.

REVISED

IDENTIFICATION STAMP DIV. OF THE STATE ARCHITECT OFFICE OF REGULATION SERVICES

PC 853

AC FLS SS

DATE 8-10-16

MK 65839

IDENTIFICATION STAMP DIV. OF THE STATE ARCHITECT

03 110412

AC FLS SS PB

Date SEP 08 2017

CHECKED

REVISIONS

LICENSE EXPIRES 6-30-10M

AURORA MODULAR INDUSTRIES

16833 Knott Ave., Riverside, CA. 92504
Phone (909) 788-7106
Fax (909) 788-0263

RELOCATABLE BUILDING FOR:
WILLIAMS/SCOTSMAN GROUP

TYPICAL DETAILS

BY JEG DATE 9-3-96

SHEET 4

3767

CAD FILE NO. PC253-4.DWG

©1996 Aurora Modular Industries