ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME	FINISH NO.	REMARKS	CASEWORK NO.	CASEWORK MATERIAL	CASEWORK FINISH
UNIT A ADMINISTRATION						
A-1	BOOK & SUPPLY ROOM	5	#30 SAND FIN. PLAST. - CEIL & WALLS	A-1	V.G.D.F.	PAINTED
A-2	FACULTY WORK ROOM	6		A-2	DO.	DO.
A-3	MEN	4		A-3		
A-4	WOMEN	4		A-4		
A-5	SHOWER	4		A-5		
A-6	TOILET	4		A-6		
A-7	CLERK	6	¼" PEGBOARD - CASE WALL - PAINTED	A-7	BIRCH	NATURAL
A-8	PUBLIC	6		A-8	DO.	DO.
A-9	HEALTH	7		A-9		
A-10	STUDENT	7		A-10	V.G.D.F.	PAINT
A-11	COUNSELOR	8		A-11	BIRCH	NATURAL
A-12	PRINCIPAL	8		A-12	D.O.	D.O.
A-13	FAN ROOM	3		A-13		
A-14	VISUAL AID STORAGE	5	#30 SAND FIN. PLAST. - VALLEY CEIL.	A-14	V.G.D.F.	PAINTED
UNIT B MULTI-PURPOSE			ONE HOSE FIRE REEL COVERS THROUGHOUT			
B-1	MULTI-PURPOSE	10	PERF. HD. BD. AT IN-WALL TABLES - PAINTED	B-1	V.G.D.F.	PAINTED
B-2	PLATFORM	14	METAL HANDRAILS - PAINTED	B-2		
B-3	INSTRUMENT STORAGE	14	METAL DOOR FRAME - PAINTED, INSIDE FLOOR	B-3	V.G.D.F.	PAINTED
B-4	DRESSING ROOM	5	METAL DOOR FRAMES, HARDBD. - PLAST. #30 SAND	B-4		
B-5	CAN WASH	5	G.I. 24 GAUGE - CAN RACK @ PICOTE CEILING	B-5		
B-6	FAN ROOM	3	NO BASE REQ'D.	B-6		
B-7	MEN	4		B-7		
B-8	WOMEN	4		B-8		
B-9	CUSTODIAN	2	RUBBER TOP SET BASE IN LIEU OF 6" CER.	B-9	V.G.D.F.	PAINTED
B-10	HEATER	2	EXT. DOOR FRAME MET. & PAINTED	B-10		
B-11	DISHWASHING	3		B-11		
B-12	PASSAGE	12		B-12	V.G.D.F.	PAINTED
B-13	SERVING AISLE	12		B-13		
B-14	KITCHEN	11		B-14		
B-15	FACULTY DINING	11	#30 SAND FIN. PLAST. IN LIEU OF NOM. PLAST	B-15	V.G.D.F.	PAINTED
B-16	STORAGE	5	VINYL ASBEST. TILE - W.W. PLAST. WALLS & CEIL.	B-16	DO.	DO.
B-17	DRY STORAGE	2	RUBBER TOP SET BASE IN LIEU OF 4" CEMENT BASE	B-17	V.G.D.F.	PAINTED
B-18	WALL-IN BOX	15	CONCRETE FLOOR - PAINT - CAST STONE SILLS AT WIND.	B-18		
B-19	TOILET	4		B-19		
B-20	LOCKER ROOM	5	VINYL ASBESTOS TILE ON PLYWD.	B-20	V.G.D.F.	PAINTED
B-21	COMPRESSOR ROOM	2	METAL DOOR FRAMES - PAINTED	B-21		
UNIT C KINDERGARTEN						
C-1	KINDERGARTEN	9	ASPHALT TILE PLAY CIRCLE IN THE FLOOR	C-1	V.G.D.F.	PAINTED
C-2	KINDERGARTEN	9	DO. DO. DO. DO. DO. DO.	C-2	DO.	DO.
C-3	WASH AREA	9	CER. TILE WAINSCOT BEHIND LAV. PART CER. TILE FL.	C-3		
C-4	WASH AREA	9	DO. DO. DO. DO. DO. DO. DO. DO. DO.	C-4		
C-5	COAT ALCOVE	7		C-5	V.G.D.F.	#PAINTED
C-6	COAT ALCOVE	7		C-6	DO.	DO.
C-7	BOYS	4		C-7		
C-8	BOYS	4		C-8		
C-9	GIRLS	4		C-9		
C-10	GIRLS	4		C-10		
C-11	TOILET	4		C-11		
C-12	WORKROOM	7	CEIL. TILE W/ NO. TILE OVER GYP. BOARD	C-12	V.G.D.F.	PAINTED
C-13	FAN ROOM	3	RUBBER TOP SET BASE; NO BLOCK WALLS	C-13		
UNIT D CLASSROOMS						
D-1	BOYS	4		D-1		
D-2	GIRLS	4		D-2		
D-3	TRANSFORMER VAULT	1		D-3		
D-4	HEATER	2	METAL DOOR FRAME - PAINTED	D-4		
D-5	CUSTODIAN	2	RUBBER TOP SET BASE IN LIEU OF 4" CEMENT BASE	D-5	V.G.D.F.	PAINTED
D-6	PRIMARY CLASSROOM	9	PERF. HARDBOARD (PAINTED) WEST ELEV. (BLOCK WALL)	D-6	DO.	DO
D-7	PRIMARY CLASSROOM	9	DO. DO. DO. DO. DO. DO. (FRAME WALL)	D-7	DO.	DO.
D-8	PRIMARY CLASSROOM	9	DO. DO. DO. DO. DO. DO. (BLOCK WALL)	D-8	DO.	DO.
D-9	PRIMARY CLASSROOM	9	DO. DO. DO. DO. DO. DO. (FRAME WALL)	D-9	DO.	DO.
D-10	PRIMARY CLASSROOM	9	DO. DO. DO. DO. DO. DO.	D-10	DO.	DO.
UNIT E CLASSROOMS						
E-1	BOYS	4		E-1		
E-2	GIRLS	4		E-2		
E-3	WOMEN	4		E-3		
E-4	MEN	4		E-4		
E-5	FACULTY LOUNGE	7		E-5	V.G.D.F.	PAINTED
E-6	PRIMARY CLASSROOM	9	PERF. HARDBOARD-PAINTED-WEST ELEV. (FRAME WALL)	E-6	DO.	DO
E-7	PRIMARY CLASSROOM	9	DO. DO. DO. DO. DO. DO.	E-7	DO.	DO.
E-8	PRIMARY CLASSROOM	9	DO. DO. DO. DO. DO. DO.	E-8	DO.	DO.
E-9	INTERMEDIATE CLASSROOM	7	DO. DO. DO. DO. DO. DO. (BLOCK WALL)	E-9	DO.	DO.
E-10	INTERMEDIATE CLASSROOM	7	DO. DO. DO. DO. DO. DO. (FRAME WALL)	E-10	DO.	DO.
UNIT F CLASSROOMS						
F-1	BOYS	4		F-1		
F-2	GIRLS	4		F-2		
F-3	HEATER ROOM	2	METAL DOOR FRAME - PAINTED	F-3		
F-4	ATHLETIC STORAGE	2	RUBBER TOP SET BASE IN LIEU OF 4" CEMENT BASE	F-4	V.G.D.F.	PAINTED
F-5	CUSTODIAN	2	DO. DO. DO. DO. DO. DO. DO. DO.	F-5	DO.	DO.
F-6	INTERMEDIATE CLASSROOM	7	PERF. HARDBOARD-PAINTED-WEST ELEV. (FRAME WALL)	F-6	DO.	DO.
F-7	INTERMEDIATE CLASSROOM	7	DO. DO. DO. DO. DO. DO.	F-7	DO.	DO.
F-8	INTERMEDIATE CLASSROOM	7	DO. DO. DO. DO. DO. DO.	F-8	DO.	DO.
F-9	INTERMEDIATE CLASSROOM	7	DO. DO. DO. DO. DO. DO. (BLOCK WALL)	F-9	DO.	DO.
F-10	INTERMEDIATE CLASSROOM	7	DO. DO. DO. DO. DO. DO. (FRAME WALL)	F-10	DO.	DO.

SCHEDULE OF FINISHES

	MATERIAL	APPLY TO	FINISH
#1			
FLOOR	CONCRETE		STEEL TROWEL
WALLS	BLOCK		FACTORY
CEILING	CONCRETE		NATURAL
EXT. DR. FRAME	METAL	BLOCK	PAINT
#2			
FLOOR	CONCRETE		STEEL TROWEL
BASE	4" CEMENT		DO. DO.
WALLS (FRAME)	H.W. PLAS. TR. SM.	METAL LATH	PAINT
WALLS (BLOCK)	BLOCK		FACTORY
FRAMES	V.G.D.F.		PAINT
TRIM	METAL		DO.
CEILING	H.W. PLAS. TR. SM.	METAL LATH	DO.
#3			
FLOOR	QUARRY TILE	CONC. SLAB	FACTORY
BASE (FRAME)	CERAMIC TILE	MET. LATH & PLAS.	DO.
BASE (BLOCK)	DO. DO.	BLOCK	DO.
WAINSCOT (FRAME)	DO. DO.	MET. LATH & PLAS.	DO.
DO. (BLOCK)	DO. DO.	BLOCK	DO.
WALLS (FRAME)	H.W. PLAS. TR. SM.	METAL LATH	PAINT
WALLS (BLOCK)	BLOCK		FACTORY
CEILING	ACOUSTIC TILE	5/8" GYP. BD.	FACT. ENAMELED
TRIM	METAL		PAINT
#4			
FLOOR	CER. MOSAIC TILE	CONC. SLAB	FACTORY
BASE (FRAME)	CERAMIC TILE	MET. LATH & PLAS.	DO.
BASE (BLOCK)	DO. DO.	BLOCK	DO.
WAINSCOT (FRAME)	DO. DO.	MET. LATH & PLAS.	DO.
DO. (BLOCK)	DO. DO.	BLOCK	DO.
WALLS (FRAME)	H.W. PLAS. TR. SM.	METAL LATH	PAINT
WALLS (BLOCK)	BLOCK		FACTORY
CEILING	H.W. PLAS. TR. SM.	METAL LATH	PAINT
FRAMES	V.G.D.F.		DO.
TRIM	METAL		DO.
#5			
FLOOR	ASPHALT TILE	CONC. SLAB	WAX
BASE	RUBBER TOP SET		DO.
WALLS (FRAME)	PLAST. #30 SAND	GYP. LATH	PAINT
WALLS (BLOCK)	BLOCK		FACTORY
CEILING	PLAST. #30 SAND	METAL LATH	PAINT
FRAMES	V.G.D.F.		DO.
TRIM	DO.		DO.
#6			
FLOOR	ASPHALT TILE	CONC. SLAB	WAX
BASE	RUBBER TOP SET		DO.
WALLS (FRAME)	PLAST. #30 SAND	GYP. LATH	PAINT
WALL (BLOCK)	BLOCK		FACTORY
CEILING	ACOUSTIC TILE	5/16" GYP. BD.	DO.
FRAME	V.G.D.F.		PAINT
TRIM	METAL		DO.
#7			
FLOOR	ASPHALT TILE	CONC. SLAB	WAX
BASE	RUBBER TOP SET		DO.
WALLS (FRAME)	D.F. PLYWOOD	WOOD FRAMING	WIDE GLAZE
WALLS (BLOCK)	BLOCK		FACTORY
CEILING	ACOUSTIC TILE	WOOD STRIPPING	DO.
FRAME	V.G.D.F.		PAINT
TRIM	DO.		DO.
#8			
FLOOR	ASPHALT TILE	CONC. SLAB	WAX
BASE	RUBBER TOP SET		DO.
WALLS (FRAME)	D.F. PLYWOOD	WOOD FRAMING	WIDE GLAZE
WALLS (BLOCK)	BLOCK		FACTORY
CEILING	ACOUSTIC TILE	WOOD STRIPPING	DO.
FRAME	BIRCH		NATURAL
TRIM	DO.		DO.
#9			
FLOOR	ASPHALT TILE	CONC. SLAB	WAX
BASE	RUBBER TOP SET		DO.
WAINSCOT	CORK	PLYWOOD & BLOCK	
WALLS (FRAME)	D.F. PLYWOOD	WOOD FRAMING	WIDE GLAZE
WALLS (BLOCK)	BLOCK		FACTORY
FRAME	V.G.D.F.		PAINT
TRIM	DO.		DO.
CEILING	ACOUSTIC TILE	WOOD STRIPPING	FACTORY
#10			
FLOOR	VINYL ASB. TILE	CONC. SLAB	WAX
BASE	RUBBER TOP SET		DO.
WALLS (FRAME)	PLAS. #30 SAND	GYP. LATH	PAINT
WALLS (BLOCK)	BLOCK		FACTORY
WAINSCOT (FRAME)	H.W. PLAS. TR. SM.	GYP. LATH	PAINT
WAINSCOT (FRAME)	PLASTIC WALL COV.	H.W. PLAS. TR. SM.	FACTORY
CEILING	ACOUSTIC PLAST.	MET. RIB LATH	PAINT
FRAME	V.G.D.F.		PAINT
TRIM	DO.		DO.
#11			
FLOOR	VINYL ASB. TILE	CONC. SLAB	WAX
BASE	RUBBER TOP SET		DO.
WALLS (FRAME)	H.W. PLAS. TR. SM.	GYP. LATH	PAINT
WALLS (BLOCK)	BLOCK		FACTORY
CEILING	ACOUSTIC TILE	5/8" GYP. BD.	FACT. ENAMELED
FRAME	V.G.D.F.		PAINTED
TRIM	METAL		DO.
#12			
FLOOR	VINYL ASB. TILE	CONC. SLAB	WAX
BASE	RUBBER TOP SET		DO.
WAINSCOT (FRAME)	PLASTIC WALL COV.	H.W. PLAS. TR. SM.	FACTORY
WALLS (FRAME)	H.W. PLAS. TR. SM.	GYP. LATH	PAINT
WALLS (BLOCK)	BLOCK		FACTORY
CEILING	ACOUSTIC TILE	5/8" GYP. BD.	FACT. ENAMELED
FRAME	V.G.D.F.		PAINT
TRIM	METAL		DO.
#13			
FLOOR	12"x12"x3/32" VCT OVER 3/8" PLYWOOD		
BASE	WOOD		
WALLS (FRAME)	5/8" GYP. BD.	WOOD FRAME	
WALLS (BLOCK)	BLOCK		FACTORY
CEILING	5/8" GYP. BD.	WOOD FRAME	
WALL	CONCRETE		NATURAL
#14			
FLOOR	MAPLE	25/32 STRIP WOOD	
BASE	RUBBER TOP SET		WAX
WALLS (FRAME)	PLAS. #30 SAND	GYP. LATH	PAINT
WALLS (BLOCK)	BLOCK		FACTORY
CEILING	ACOUSTIC PLAST.	MET. RIB LATH	PAINT
FRAME	V.G.D.F.		PAINT
TRIM	DO.		DO.
SMOKE VENT	PLAST. #30 SAND	MET. RIB. LATH	
#15			
FLOOR	CONCRETE		STEEL TROWEL
BASE	4" CEMENT		DO. DO.
WALLS (FRAME)	H.W. PLAS. TR. SM.	METAL LATH	EPICOTE
WALLS (BLOCK)	H.W. PLAS. TR. SM.		DO.
CEILING	H.W. PLAS. TR. SM.	METAL LATH	DO.
FRAMES	METAL		PAINT
TRIM	METAL		DO.
EXT. DR. FRAMES	DO.	BLOCK	DO.
#16			

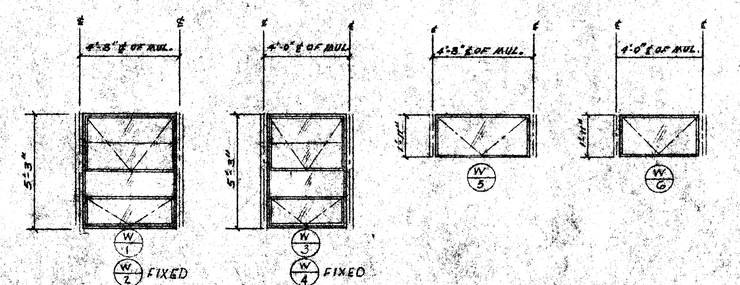

- WINDOW DIM. ARE ℄ TO ℄ OF 4"x6" OR 4"x8" WOOD MULLION; SASH REB. SHALL ADJ. DIM. - DO AS TO MAINTAIN A MAXIMUM OF 1/16" BETWEEN BACK LEG OF SASH & MULLION.
- ALL SASH IN TOILET ROOMS SHALL HAVE OBSCURE GLASS; ALL OTHER SASH UNLESS NOTED OTHERWISE SHALL BE GLAZED WITH CLEAR DOUBLE STRENGTH GLASS TO REAR.
- SEE INTERIOR ELEVATIONS FOR OTHER NOTES & CLARIFICATIONS.
- ALL SASH VENTILATORS AT TOILET ROOMS AND KITCHEN SHALL BE HEAT SCREENED W 16 MESH B.W. SCREEN

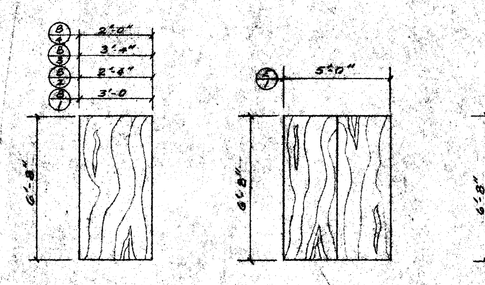

- INTERIOR 1 3/4" SOLID WOOD CORE DOORS. PAINT GRADE BIRCH VENEER FINISH BOTH SIDES.

- EXTERIOR 1 3/4" MINERAL CORE DOORS PAINT GRADE BIRCH VENEER FINISH BOTH SIDES

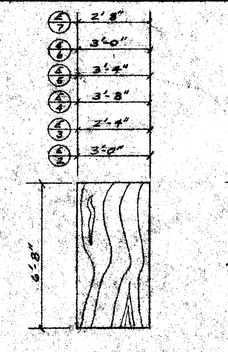

- MINERAL CORE FIRE DOORS N.B.F.U. LABELLED DOOR & MET. FRAME - PAINT GRADE BIRCH VENEER - FINISH BOTH SIDES



- REFRIGERATOR DOOR





- EXTERIOR 1 3/4" MINERAL CORE DOOR - PAINT GRADE BIRCH VENEER FINISH BOTH SIDES



- INTERIOR 1 3/4" SOLID WOOD CORE DOORS PAINT GRADE BIRCH VENEER - FINISH BOTH SIDES.



- EXTERIOR 1 3/4" MINERAL CORE DOOR - PAINT GRADE BIRCH VENEER FINISH BOTH SIDES



- INTERIOR 1 3/4" WOOD CORE DOOR - PAINT GRADE BIRCH VENEER - FINISH BOTH SIDES. GLASS SHALL BE IN METAL STOPS



- EXPANDED METAL DOORS



WINDOW SCHEDULE SCALE 1/4"=1'-0"

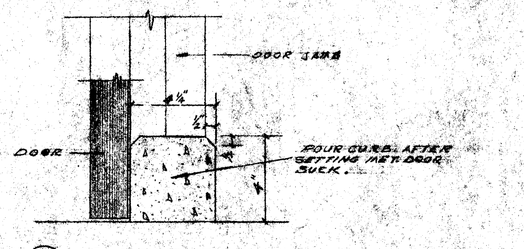

6 / A-24 CONC. CURB 3½"=1'-0"



1 / A-24 CONC. CURB 12"=1'-0"

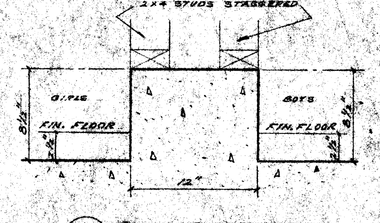

2 / A-24 CONC. CURB 12"=1'-0"



3 / A-24 CONC. CURB 12"=1'-0"

DOOR SCHEDULE SCALE 3/8"=1'-0"

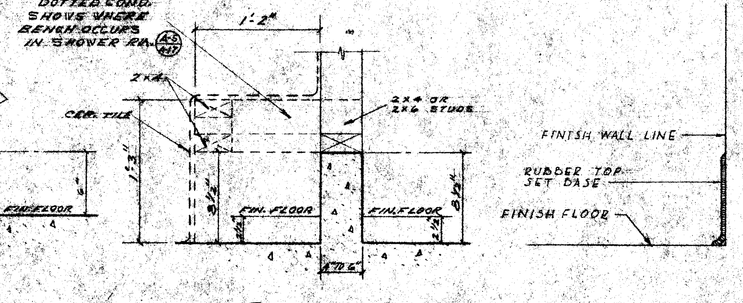

4 / A-24 CONC. CURB 1½"=1'-0"

5 / A-24 RUBBER TOP SET BASE = 3" = 1'-0"

ROOM FINISH, WINDOW AND DOOR SCHEDULE

OFFICE OF SUPERINTENDENT OF SCHOOLS
APPROVED
DATE

STATE OF CALIFORNIA
DEPARTMENT OF PUBLIC WORKS
DIVISION OF ARCHITECTURE

STATE OF CALIFORNIA — DEPARTMENT OF PUBLIC WORKS
DIVISION OF ARCHITECTURE
20571 APPROVED DEC 19 1960

BAKERSFIELD CITY SCHOOL DISTRICT
BAKERSFIELD, CALIFORNIA
BOARD OF EDUCATION

CHECK AND VERIFY ALL DIMENSIONS AND CONDITIONS AT JOB SITE BEFORE PROCEEDING WITH THE WORK. REPORT ANY DISCREPANCIES TO THE ARCHITECT

APPROVED	DATE

MARK	DATE	REVISIONS
A		
A		
A		
A		

BAKERSFIELD CITY SCHOOL DISTRICT
11/21/1960
DATE
By John L. Lester
Executive Officer

DATE DEC 19 1960
DRAWN A.M.
CHECKED
E.L.M.

ERNEST L. McVOY A.I.A. ARCHITECT
1831 E. CHESTNUT
BAKERSFIELD
PHONE 3-8861
CALIFORNIA

CSSB
JOB No. 60-16

SECTION 15 SCHOOL
PASADENA ST. & RENEGADE AVE.
BAKERSFIELD, CALIFORNIA

SHEET 2 OF 2 SHEETS