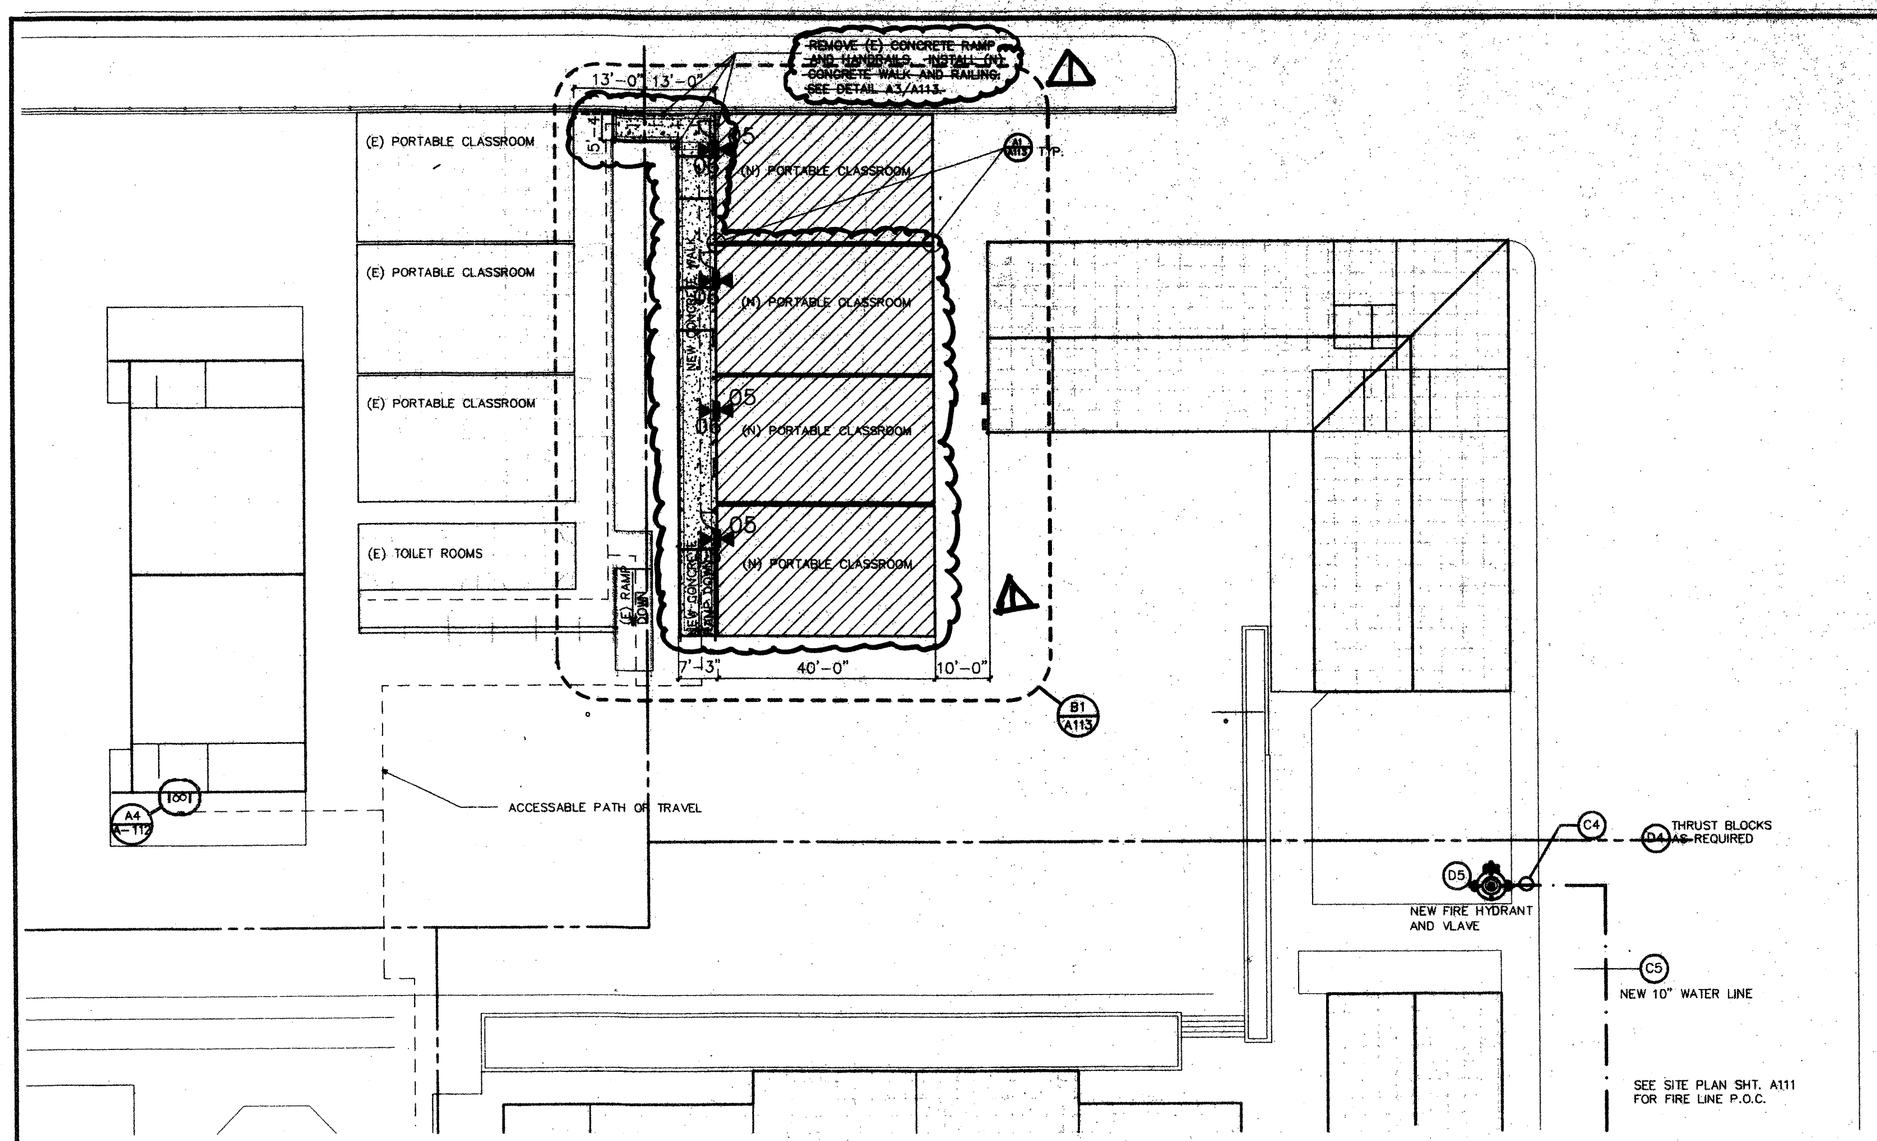

C1 PARTIAL SITE PLAN

SCALE: 1"=20'

NOTE: SEE DETAIL (B4) FOR ▼06 ▲05

EXISTING BUILDINGS

NEW PORTABLE CLASSROOMS

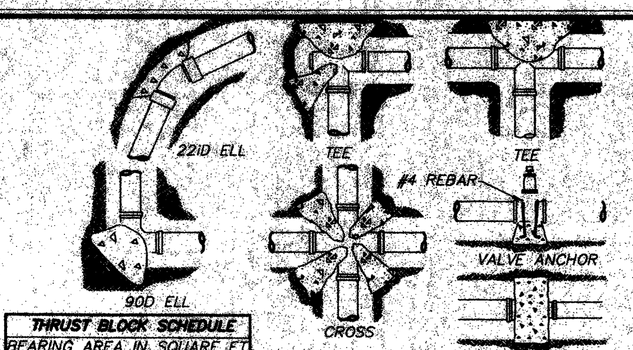

THRUST BLOCK SCHEDULE				
BEARING AREA IN SQUARE FT.				
PIPE SIZE	DR PLUG	90D ELL	45D ELL	22½D ELL
4"	2	2	2	1
6"	3	4	2	2
8"	5	7	4	2
10"	8	11	6	3
12"	11	16	8	4

NOTES:
1) ALL VALVES, FITTINGS AND DIRECTIONAL CHANGES ARE TO BE HELD IN PLACE BY CONCRETE THRUSTS BLOCKS.
2) BEARING AREAS INDICATED ARE BASED ON ALLOWABLE SOIL PRESSURES OF 1000 PSF.
3) CONCRETE IS NOT TO BEAR AGAINST PIPE. THRUST BLOCK TO ONLY BE IN CONTACT WITH FITTING.

WATER AND SANITATION DEPARTMENT – WATER RESOURCES DIVISION
CITY OF BAKERSFIELD, CALIFORNIA
THRUST BLOCK DETAIL

D4 THRUST BLOCK

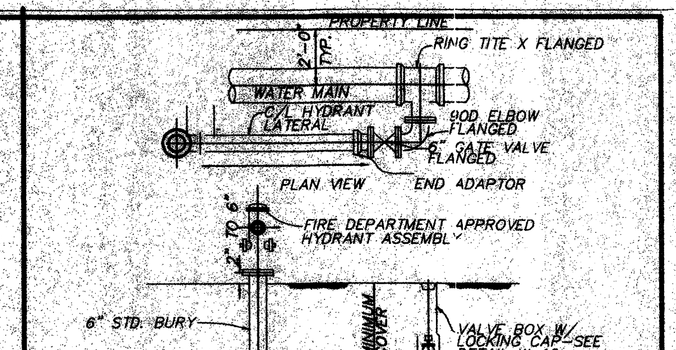

WATER AND SANITATION DEPARTMENT – WATER RESOURCES DIVISION
CITY OF BAKERSFIELD, CALIFORNIA
FIRE HYDRANT ASSEMBLY

D5 FIRE HYDRANT

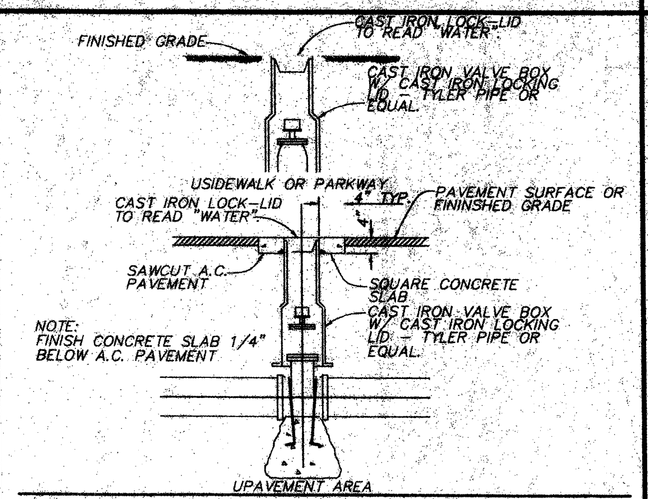

WATER AND SANITATION DEPARTMENT – WATER RESOURCES DIVISION
CITY OF BAKERSFIELD, CALIFORNIA
VALVE BOX DETAIL

C4 VALVE BOX

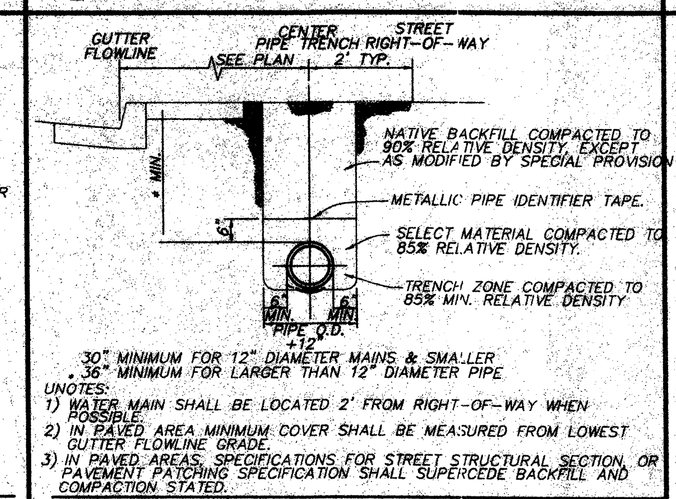

30" MINIMUM FOR 12" DIAMETER MAINS & SMALLER
36" MINIMUM FOR LARGER THAN 12" DIAMETER PIPE

NOTES:
1) WATER MAIN SHALL BE LOCATED 2' FROM RIGHT-OF-WAY WHEN POSSIBLE.
2) IN PAVED AREA MINIMUM COVER SHALL BE MEASURED FROM LOWEST GUTTER FLOWLINE GRADE.
3) IN PAVED AREAS, SPECIFICATIONS FOR STREET STRUCTURAL SECTION, OR PAVEMENT PATCHING SPECIFICATION SHALL SUPERCEDE BACKFILL AND COMPACTION STATED.

WATER AND SANITATION DEPARTMENT – WATER RESOURCES DIVISION
CITY OF BAKERSFIELD, CALIFORNIA
STANDARD PIPE TRENCH

C5 PIPE TRENCH

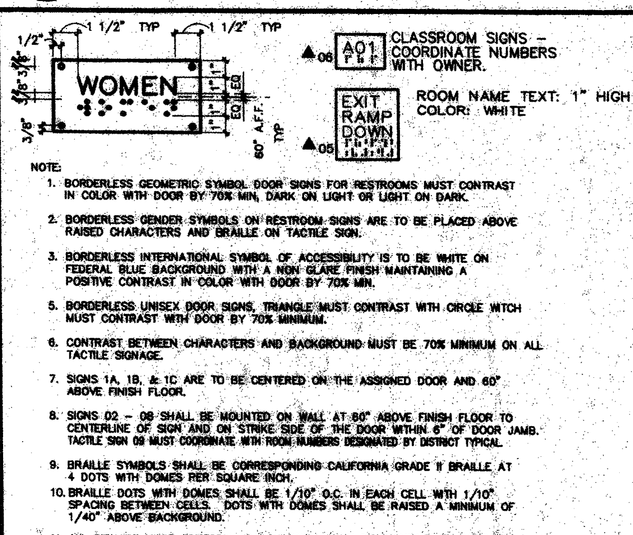

NOTE:
1. BORDERLESS GEOMETRIC SYMBOL DOOR SIGNS FOR RESTROOMS MUST CONTRAST IN COLOR WITH DOOR BY 70% MIN, DARK ON LIGHT OR LIGHT ON DARK.
2. BORDERLESS GENDER SYMBOLS ON RESTROOM SIGNS ARE TO BE PLACED ABOVE RAISED CHARACTERS AND BRAILLE ON TACTILE SIGN.
3. BORDERLESS INTERNATIONAL SYMBOL OF ACCESSIBILITY IS TO BE WHITE ON FEDERAL BLUE BACKGROUND WITH A NON GLARE FINISH MAINTAINING A POSITIVE CONTRAST IN COLOR WITH DOOR BY 70% MIN.
4. BORDERLESS UNISEX DOOR SIGNS, TRIANGLE MUST CONTRAST WITH CIRCLE WITCH MUST CONTRAST WITH DOOR BY 70% MINIMUM.
5. CONTRAST BETWEEN CHARACTERS AND BACKGROUND MUST BE 70% MINIMUM ON ALL TACTILE SIGNAGE.
6. SIGNS 1A, 1B, & 1C ARE TO BE CENTERED ON THE ASSIGNED DOOR AND 60" ABOVE FINISH FLOOR.
7. SIGNS 02 – 08 SHALL BE MOUNTED ON WALL AT 60" ABOVE FINISH FLOOR TO CENTERLINE OF SIGN AND ON STRIKE SIDE OF THE DOOR WITHIN 6" OF DOOR JAMB. TACTILE SIGN 09 MUST COORDINATE WITH ROOM NUMBERS DESIGNATED BY DISTRICT TYPICAL.
8. BRAILLE SYMBOLS SHALL BE CORRESPONDING CALIFORNIA GRADE II BRAILLE AT 4 DOTS WITH DOMES PER SQUARE INCH.
9. BRAILLE DOTS WITH DOMES SHALL BE 1/20" O.C. IN EACH CELL WITH 1/10" SPACING BETWEEN CELLS. DOTS WITH DOMES SHALL BE RAISED A MINIMUM OF 1/40" ABOVE BACKGROUND.
10. ALL SIGNAGE MUST CONFORM TO CALIFORNIA TITLE 24 REGULATIONS, 1003.2.8 AND 11178.5

B4 SIGNAGE

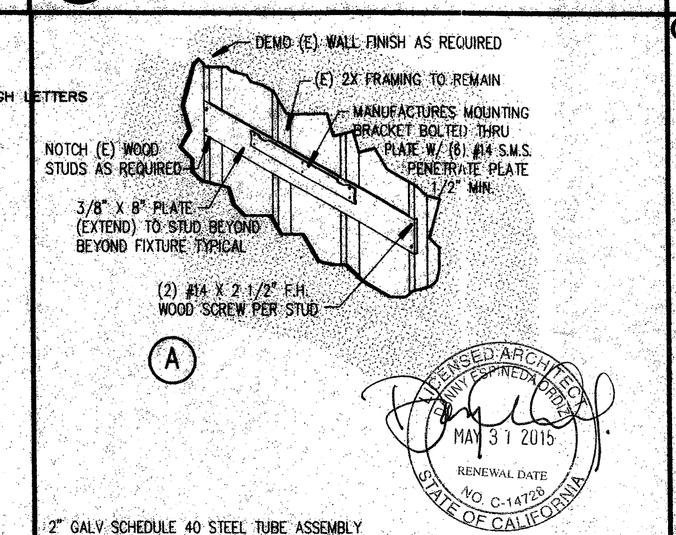

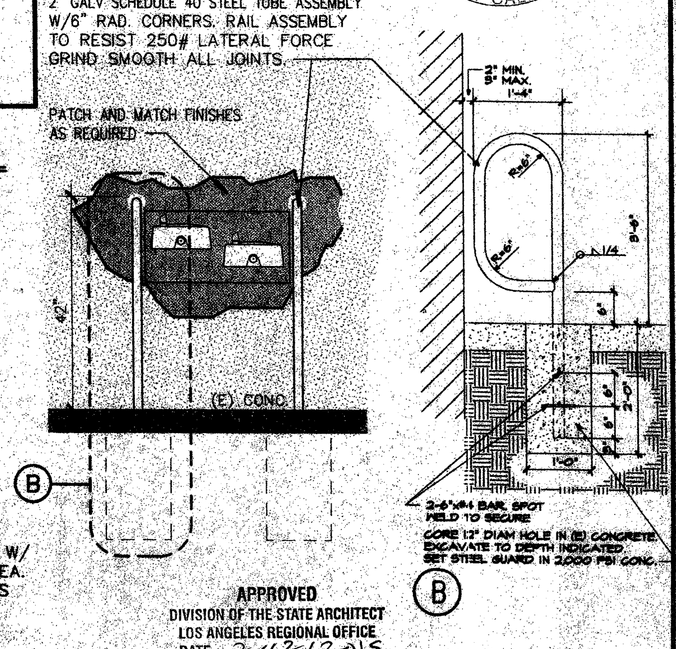

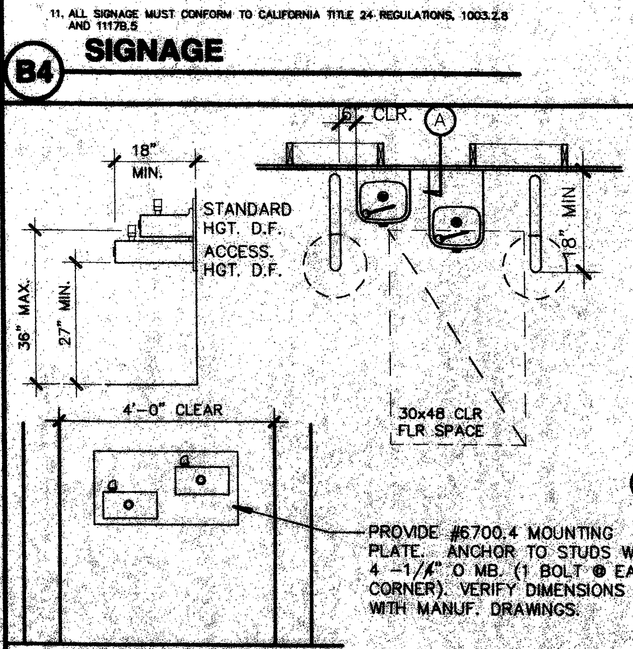

APPROVED
DIVISION OF THE STATE ARCHITECT
LOS ANGELES REGIONAL OFFICE
DATE 2/12/2015

A4 HI-LO DRINKING FOUNTAIN

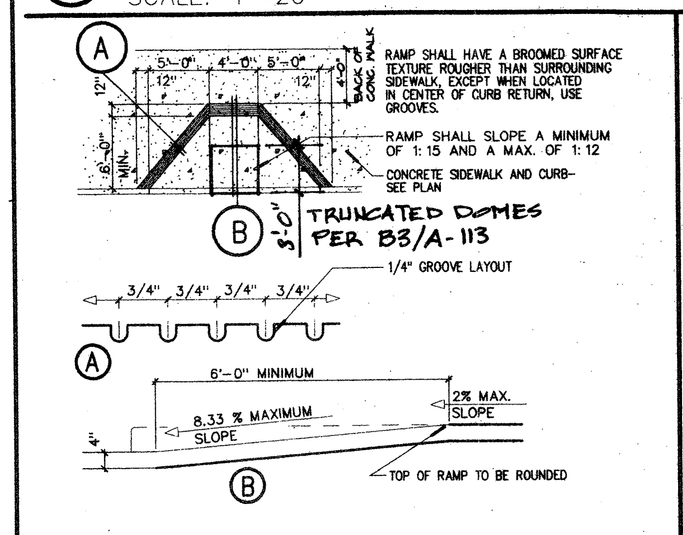

B1 ACCESSIBLE PARKING RAMP

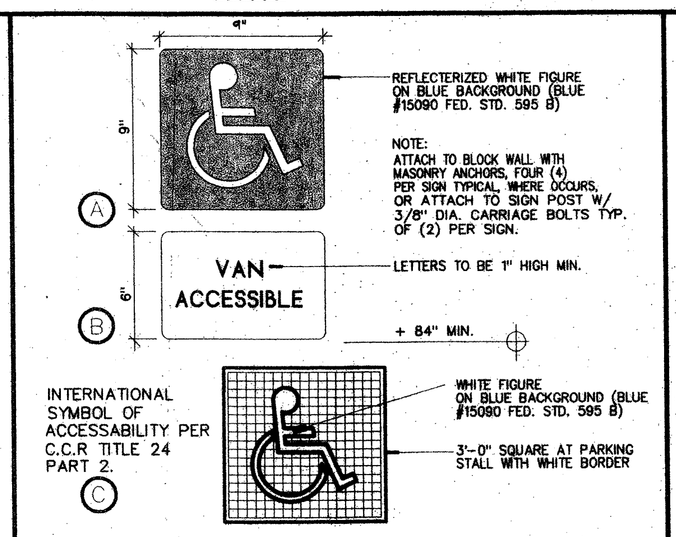

B2 ACCESS SIGNAGE

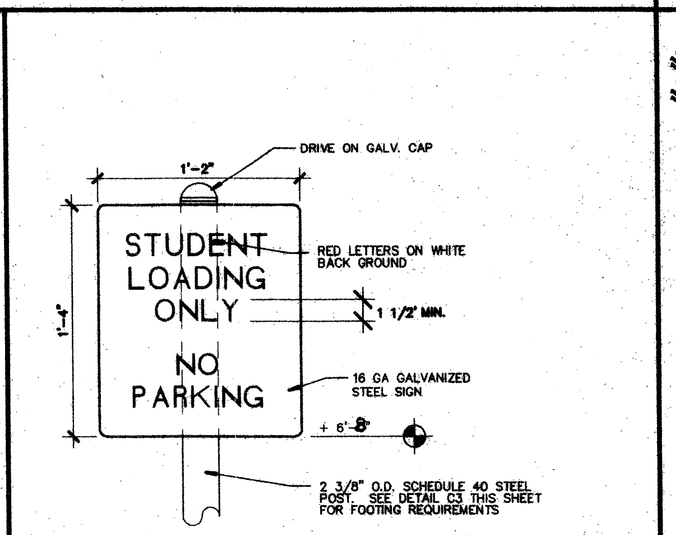

B3 STUDENT DROP OFF SIGNAGE

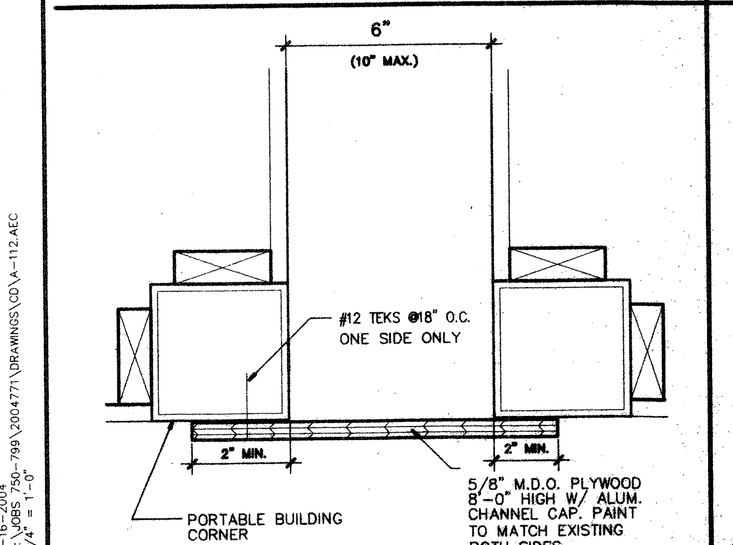

A1 CLOSURE PANEL PLAN

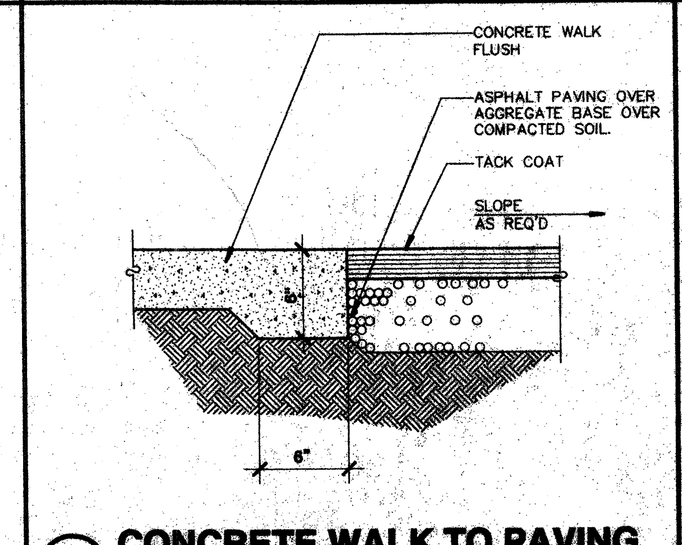

A2 CONCRETE WALK TO PAVING

SCALE: 3"=1'-0"

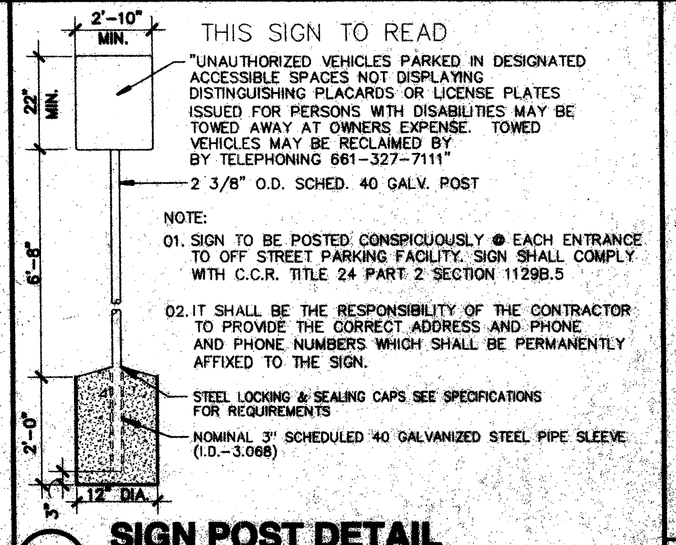

NOTE:
01. SIGN TO BE POSTED CONSPICUOUSLY @ EACH ENTRANCE TO OFF STREET PARKING FACILITY. SIGN SHALL COMPLY WITH C.C.R. TITLE 24 PART 2 SECTION 1129B.5
02. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE THE CORRECT ADDRESS AND PHONE AND PHONE NUMBERS WHICH SHALL BE PERMANENTLY AFFIXED TO THE SIGN.

STEEL LOCKING & SEALING CAPS SEE SPECIFICATIONS FOR REQUIREMENTS
NOMINAL 3" SCHEDULED 40 GALVANIZED STEEL PIPE SLEEVE (I.D.–3.068)

A3 SIGN POST DETAIL

CONCRETE FOOTING–FLUSH W/ WALK OR ADJACENT GRADE, TYPICAL. SLOPE CONE AROUND POLE

ORDIZ MELBY
ARCHITECTS, INC.
5500 MING AVENUE SUITE 280
BAKERSFIELD, CALIFORNIA 93309
TELEPHONE (661) 832-5258
FACSIMILE (661) 832-4291

LICENSED ARCHITECT WILLIAM JOHN MELBY No. C-16835 DEC. 31, 2005 RENEWAL DATE STATE OF CALIFORNIA

DANNY E. ORDIZ, AIA
ARCHITECT C-14,728
WILLIAM J. MELBY, AIA
ARCHITECT C-16,835

IDENTIFICATION STAMP
DIVISION OF STATE ARCHITECT
OFFICE OF REGULATION SERVICES
APP 03-108679
FILE#: 15-1-6
AC SM FLS CO SS KR
DATE JUL 26 2005

PTN: 63321-50

SITE IMPROVEMENTS
PORTABLE CLASSROOMS
AT
CHIPMAN JUNIOR HIGH SCHO

BAKERSFIELD
CITY SCHOOL DISTRICT

EISSLER STREET
BAKERSFIELD
CALIFORNIA
93306

MARK	DATE	DESCRIPTION
SD		
CD		
1	01-13-15	CCD #01

LICENSED ARCHITECT WILLIAM JOHN MELBY No. C-14729 RENEWAL DATE MAY 31 2015 STATE OF CALIFORNIA

JOB NUMBER:
2004771
CAD DRAWING FILE:
A-112.AEC
DRAWN BY:
JAH
CHECKED BY:
EW

CHECK AND VERIFY ALL DIMENSIONS BEFORE PROCEEDING WITH THE WORK. REPORT DISCREPANCIES TO THE ARCHITECT.
THE DRAWINGS, IDEAS, AND DESIGNS REPRESENTED ON THIS SHEET ARE THE PROPERTY OF THE ARCHITECT.
COPYRIGHT ORDIZ-MELBY ARCHITECTS, INC. 2004

SHEET TITLE

ENLARGED SITE PLAN AND DETAILS

SHEET IDENTIFICATION NUMBER

A-112

SHEET 02 OF 03

PLOT TIME: 5:22 PM
PLOT DATE: 1/26/04
PATH/NAME: C:\JOBS 750--799\2004771\DRAWINGS\CD\A-112.AEC
PLOT SCALE: 1/4" = 1'-0"