ABBREVIATIONS

℄ AND		℄ CENTERLINE	⊥ PERPENDICULAR
∠ ANGLE		▭ CHANNEL	PLATE
@ AT		Ø DIAMETER	# POUND OR NUMBER

A/C . AIR CONDITIONING
AB . ANCHOR BOLT
AC . ASPHALT CONCRETE
AGG . AGGREGATE
AL . ALUMINUM
ARCH. ARCHITECTURAL

BD . BOARD
BLDG. BUILDING
BLK . BLOCK
BLKG. BLOCKING
BOT . BOTTOM

CES . CARPET EDGE STRIP
C . CARPET
CAB . CABINET
CEM . CEMENT
CHB . CHALKBOARD
CLG . CEILING
CLR . CLEAR(ANCE)
CMU . CONCRETE MASONRY UNIT
COL . COLUMN
CONC. CONCRETE
CONT. CONTINUOUS
CT . CERAMIC TILE

DBL . DOUBLE
DET . DETAIL
DF . DRINKING FOUNTAIN
DIM . DIMENSION
DN . DOWN
DO . DITTO

(E) . EXISTING
E . ENAMEL
EA . EACH
EB . EXPANSION BOLT
EDF . ELECTRIC DRINKING FOUNTAIN
EJ . EXPANSION JOINT
EL . ELEVATION
ELEC. ELECTRICAL
EQ . EQUAL
EXT . EXTERIOR
EJ . EXPANSION JOINT

FD . FLOOR DRAIN
FEC . FIRE EXTINGUISHER CABINET
FF . FINISH FLOOR
FIN . FINISH
FL . FLUORESCENT
FLR . FLOOR
FOB . FACE OF BRICK
FOC . FACE OF CONCRETE
FOS . FACE OF STUD
FT . FOOT OR FEET
FTG . FOOTING
FV . FIELD VERIFY

GA . GAUGE
GB . GYPSUM BOARD
GI . GALVANIZED STEEL
GL . GLASS
GYP . GYPSUM

HB . HOSE BIB
HCAP. HANDICAP
HM . HOLLOW METAL
HS . HARDNER/SEALER
HT . HEIGHT
HVAC. HEAT, VENT & AIR CONDITION

INT . INTEGRAL

LAB . LABORATORY
LP . LAMINATED PLASTIC

MAS . MASONRY
MAT . MATERIAL
MAX . MAXIMUM
MB . MACHINE BOLT
MECH. MECHANICAL
MFR . MANUFACTURER
MIN . MINIMUM
MO . MASONRY OPENING
MT . METAL THRESHOLD
MTL . METAL

NAT . NATURAL
NIC . NOT IN CONTRACT
NO . NUMBER
NTS . NOT TO SCALE

O/ . OVER
OC . ON CENTER
OD . OUTSIDE DIAMETER

PCPL. PORTLAND CEMENT PLASTER
PL . PLASTER
PLYWD PLYWOOD
PT . POINT
PVA . POLY-VINYL ACETATE
PVC . POLY-VINYL CHLORIDE

(R) . RECESSED
REG . REGISTER
RES . RESILIENT
RM . ROOM
RO . ROUGH OPENING

S.D. . STRUCTURAL DECK
(S) . SURFACE MOUNTED
SH . SHELF
SHT . SHEET
SIM . SIMILAR
SPEC. SPECIFICATION
SQ . SQUARE
SS . STAINLESS STEEL
STD . STANDARD
STL . STEEL
STRUC STRUCTURAL
SV . SHEET VINYL

TME. TO MATCH EXISTING
T&T . T-BAR & ACOUSTIC PANELS
TB . TACKBOARD
TEMP. TEMPERED
THK . THICK(NESS)
TR . TRANSPARENT
TSB . TOPSET BASE
TYP . TYPICAL
TJ . TOOL JOINT

UON . UNLESS OTHERWISE NOTED

VCT . VINYL COMPOSITION TILE
VCTB. VINYL COVERED TACKBOARD
VERT. VERTICAL
VP . VENEER PLASTER
VWC . VINYL WALL COVERING

W/ . WITH
WD . WOOD
WP . WATERPROOF

SYMBOL LEGEND

ROOM NUMBER / LOCATION OF INTERIOR ELEVATION
DOOR NUMBER
DETAIL NUMBER
SHEET NUMBER ON WHICH DETAIL IS DRAWN
BUILDING SECTION LETTER
SHEET NUMBER ON WHICH SECTION IS DRAWN
WALL TYPE
LOCATION OF WALL TYPE
CABINET SECTION
LOCATION OF CABINET SECTION

BATT INSULATION
GYPSUM BOARD
MASONRY
CONCRETE
STEEL
STUD WALL
STUCCO
CERAMIC TILE
GLASS
EARTH
GRAVEL

DEFERRED APPROVAL NOTE:
INSTALLATION OF "PYRA MIRROR" CEILING SYSTEM SHALL NOT BE STARTED UNTIL DETAIL PLANS, SPECS AND ENGINEERING CALCULATIONS HAVE BEEN ACCEPTED AND SIGNED BY THE ARCHITECT OR STRUCTURAL ENGINEER IN GENERAL CHARGE OF DESIGN AND THE SIGNATURE OF THE ARCHITECT OR PROFESSIONAL ENGINEER WHO HAS BEEN DELEGATED RESPONSIBILITY COVERING THE WORK SHOWN ON A PARTICULAR PLAN OR SPECIFICATION AND APPROVED BY THE OFFICE OF THE STATE ARCHITECT

VICINITY MAP

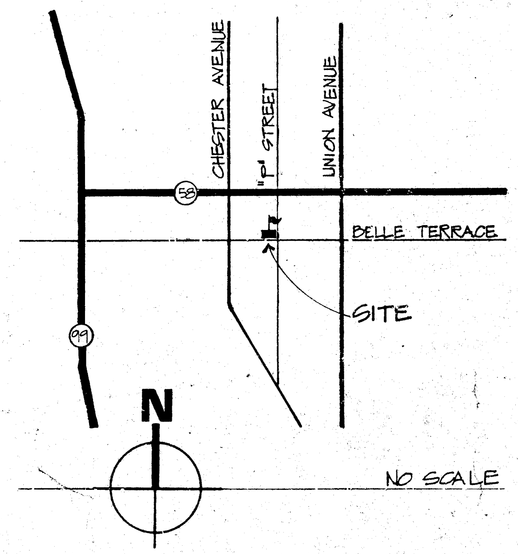

SHEET INDEX

architectural

A COVER SHEET
A-1 KEY PLAN
A-2 PARTIAL PLANS & DEMOLITION PLANS/WALL TYPES
A-3 PARTIAL PLANS & BUILDING 1 PLAN/WALL TYPES
A-4 FINISH SCHEDULE
A-5 FINISH SCHEDULE
A-6 FINISH SCHEDULE
A-7 DOOR SCHEDULE
A-8 DOOR SCHEDULE
A-9 REFLECTED CEILING PLAN
A-10 REFLECTED CEILING PLAN
A-11 REFLECTED CEILING PLAN
A-12 ROOF PLAN
A-13 ELEVATIONS
A-14 ELEVATIONS & SECTIONS
A-15 SECTIONS
A-16 INTERIOR ELEVATIONS
A-17 INTERIOR ELEVATIONS
A-18 INTERIOR ELEVATIONS
A-19 INTERIOR ELEVATIONS & SECTIONS
A-20 INTERIOR ELEVATIONS
A-21 DETAILS
A-22 DETAILS
A-23 DETAILS
A-24 DETAILS
A-25 DETAILS

structural

S-1 GENERAL NOTES & TYPICAL DETAILS
S-2 BUILDING 1 - FOUNDATION PLAN & DETAILS
S-3 BUILDING 1 - SECTIONS & DETAILS
S-4 BUILDING 1 - SECTIONS & DETAILS
S-5 BUILDING 1 - SECTIONS & DETAILS
S-6 BUILDINGS 1 & 2 - ROOF & DETAILS
S-7 BUILDING 1 - SECTIONS & DETAILS

mechanical

MP-1 PARTIAL PLUMBING DEMOLITION PLAN, BLDG. 1 & DETAILS
MP-2 AIR CONDITIONING & PARTIAL PLUMBING PLAN BLDG 1 & DTLS
MP-3 AIR CONDITIONING & PARTIAL PLUMBING PLAN BLDGS 2 & 3 & DTLS
MP-4 AIR CONDITIONING & PLUMBING PLANS, BLDG. 1 & DTLS
MP-5 AIR CONDITIONING & PLUMBING PLANS BLDGS. 2 & 3
MP-6 AIR CONDITIONING ROOF PLAN BLDG 1 & DETAILS
MP-7 DETAILS
MP-8 SCHEDULES

electrical

E-1 ELECTRICAL SITE PLAN & SYMBOL SCHEDULE
E-2 FLOOR PLAN BLDGS 2 & 3 LIGHTING
E-3 FLOOR PLAN BLDGS. 2 & 3 LIGHTING
E-4 FLOOR PLAN BLDGS. 2 & 3 LIGHTING
E-5 FLOOR PLAN LIGHTING
E-6 FLOOR PLAN BLDG. 1 LIGHTING, POWER & SIGNAL
E-7 PANEL SCHEDULES, POWER SINGLE LINE DIAGRAM
E-8 STAGE LIGHTING SINGLE LINE DIAGRAM & DIMMING EQUIPMENT SCHEDULE.

acoustical

AC-1 SOUND CONTROL DIAGRAMS, PLANS & DETAILS

BLAIR LEARNING CENTER RECONSTRUCTION

900 belle terrace bakersfield, california

CONSULTANTS

structural

JOHN Q FORESTELLE
920 WIFLE ROAD
BAKERSFIELD, CA 93304
805·397·7800

mechanical / plumbing

DONALD R. LAWRENCE & ASSOCIATES
T. W. PATTERSON BLDG. SUITE 717
FRESNO, CA 93721
209·486·1890

electrical

INTERSTATE ENGINEERING
127 E. BELMONT AVENUE
FRESNO, CA 93701
209·486·1181

acoustical

WILFRED A. MAUMUND
209 DAUE MAJOR
REDONDO BEACH, CA 90277
213·375·2987

GENERAL NOTES

1. ALL BIDDERS SHALL EXAMINE THE SITE FOR EXISTING CONDITIONS PRIOR TO SUBMITTAL OF BIDS. SITE VISITS DURING BIDDING SHALL BE COORDINATED WITH THE OWNER PER SPECIFICATIONS.
2. ALL GENERAL CONTRACTORS/TRADES SHALL PROTECT EXISTING WORK. ALL WORK DAMAGED SHALL BE REPLACED WITH MATCHING MATERIALS, TEXTURES AND COLORS -- PAINTING IS REQUIRED FOR ALL SURFACES AFFECTED BY WORK IN THIS CONTRACT.
3. EXISTING WORK IS SHOWN ONLY FOR REFERENCE, AND THE OWNER/ARCHITECT DOES NOT GUARANTEE THAT THE EXISTING WORK EXISTS AS IT IS SHOWN IN THESE DRAWINGS.
4. THIS PROJECT INCLUDES NO SITE DEVELOPMENT WORK EXCEPT WHERE PATCHING OR REPAIRING IS REQUIRED.
5. INDIVIDUAL CONTRACTORS ARE RESPONSIBLE FOR THEIR OWN CLEANUP WORK AS WORK PROGRESSES.
6. INDIVIDUAL BID PACKAGES ARE IDENTIFIED IN THE SPECIFICATIONS UNDER INDEX OF BID PACKAGES.
7. RELATED WORK INCIDENTAL TO THE COMPLETION OF AN INDIVIDUAL CONTRACTOR'S SCOPE OF WORK (I.E. DEMOLITION, UTILITY DISCONNECT/RECONNECTION, INSULATION, PATCH & REPAIR) — UNLESS SPECIFICALLY NOTED TO BE PERFORMED BY OTHERS — SHALL BE THE RESPONSIBILITY OF THE PRIME CONTRACTOR FOR THE GIVEN WORK INDICATED. BIDDERS SHOULD CAREFULLY EXAMINE PLANS AND SPECIFICATIONS FOR SEGREGATED CONTRACTS TO CLARIFY DIVISION AND SCOPE OF INTERRELATED WORK.
8. REFER TO STRUCTURAL DRAWING S-1 FOR TYPICAL WOOD GRADES, CONNECTIONS, ETC.
9. REMOVE ALL EXISTING SUSPENDED CEILINGS WHICH ARE TO RECEIVE NEW SUSPENDED CEILINGS OR RIGLATH CEILINGS.

BUILDING DATA

OCCUPANCY
E-1
A-2 (AUDITORIUM)
CONSTRUCTION TYPE
V-N
I-1 HR (AUDITORIUM)
APPROXIMATE AREA
(FOR REFERENCE ONLY)

BLDG. 1	G.I.G.17	SQ.FT.
BLDG. 2	7,056	
BLDG. 3	7,245	
BLDG. 4	6,651	
BLDG. 5	7,538	
BLDG. 6	6,567	
BLDG. 7	4,975	
BLDG. 8	346	
BLDG. 9	10,560	
BLDG. 10	4,682	
TOTAL	60,377	SQ.FT.

0.9 A APPLICATION # 8078

APPLICABLE CODES
U.B.C. 1979
STATE OF CALIFORNIA
TITLE 19 PUBLIC SAFETY
TITLE 21 PUBLIC WORK
TITLE 24 BUILDING STANDARDS

NOTE: THE INTENT OF THE PROJECT IS TO RECONSTRUCT THE EXISTING BUILDINGS IN ACCORDANCE WITH TITLE 24, C.A.C. — SHOULD ANY CONDITIONS DEVELOP THAT ARE NOT COVERED BY THE CONTRACT DOCUMENTS, WHEREIN THE REQUIRED WORK WILL NOT COMPLY WITH TITLE 24, A CHANGE ORDER DETAILING & SPECIFYING THE REQ. WORK SHALL BE SUBMITTED TO APPROVING AGENCY PRIOR TO START OF THE WORK.

bigger frapwell ghezzi cartnal
SET

approved
OFFICE OF THE STATE ARCHITECT
4/18/80 12:26 PM

REVISED FEB 1981 JK

C-3269
C-3132
ARC-8564-X

bigger frapwell ghezzi cartnal
architects/planners
21 south real road/box 9698
bakersfield california 93309
805 832 4122
© copyright 1980

TITLE SHEET
BLAIR LEARNING CENTER RECONSTRUCTION
900 belle terrace, bakersfield, california

job 8E-102
date 3-28-1980

A