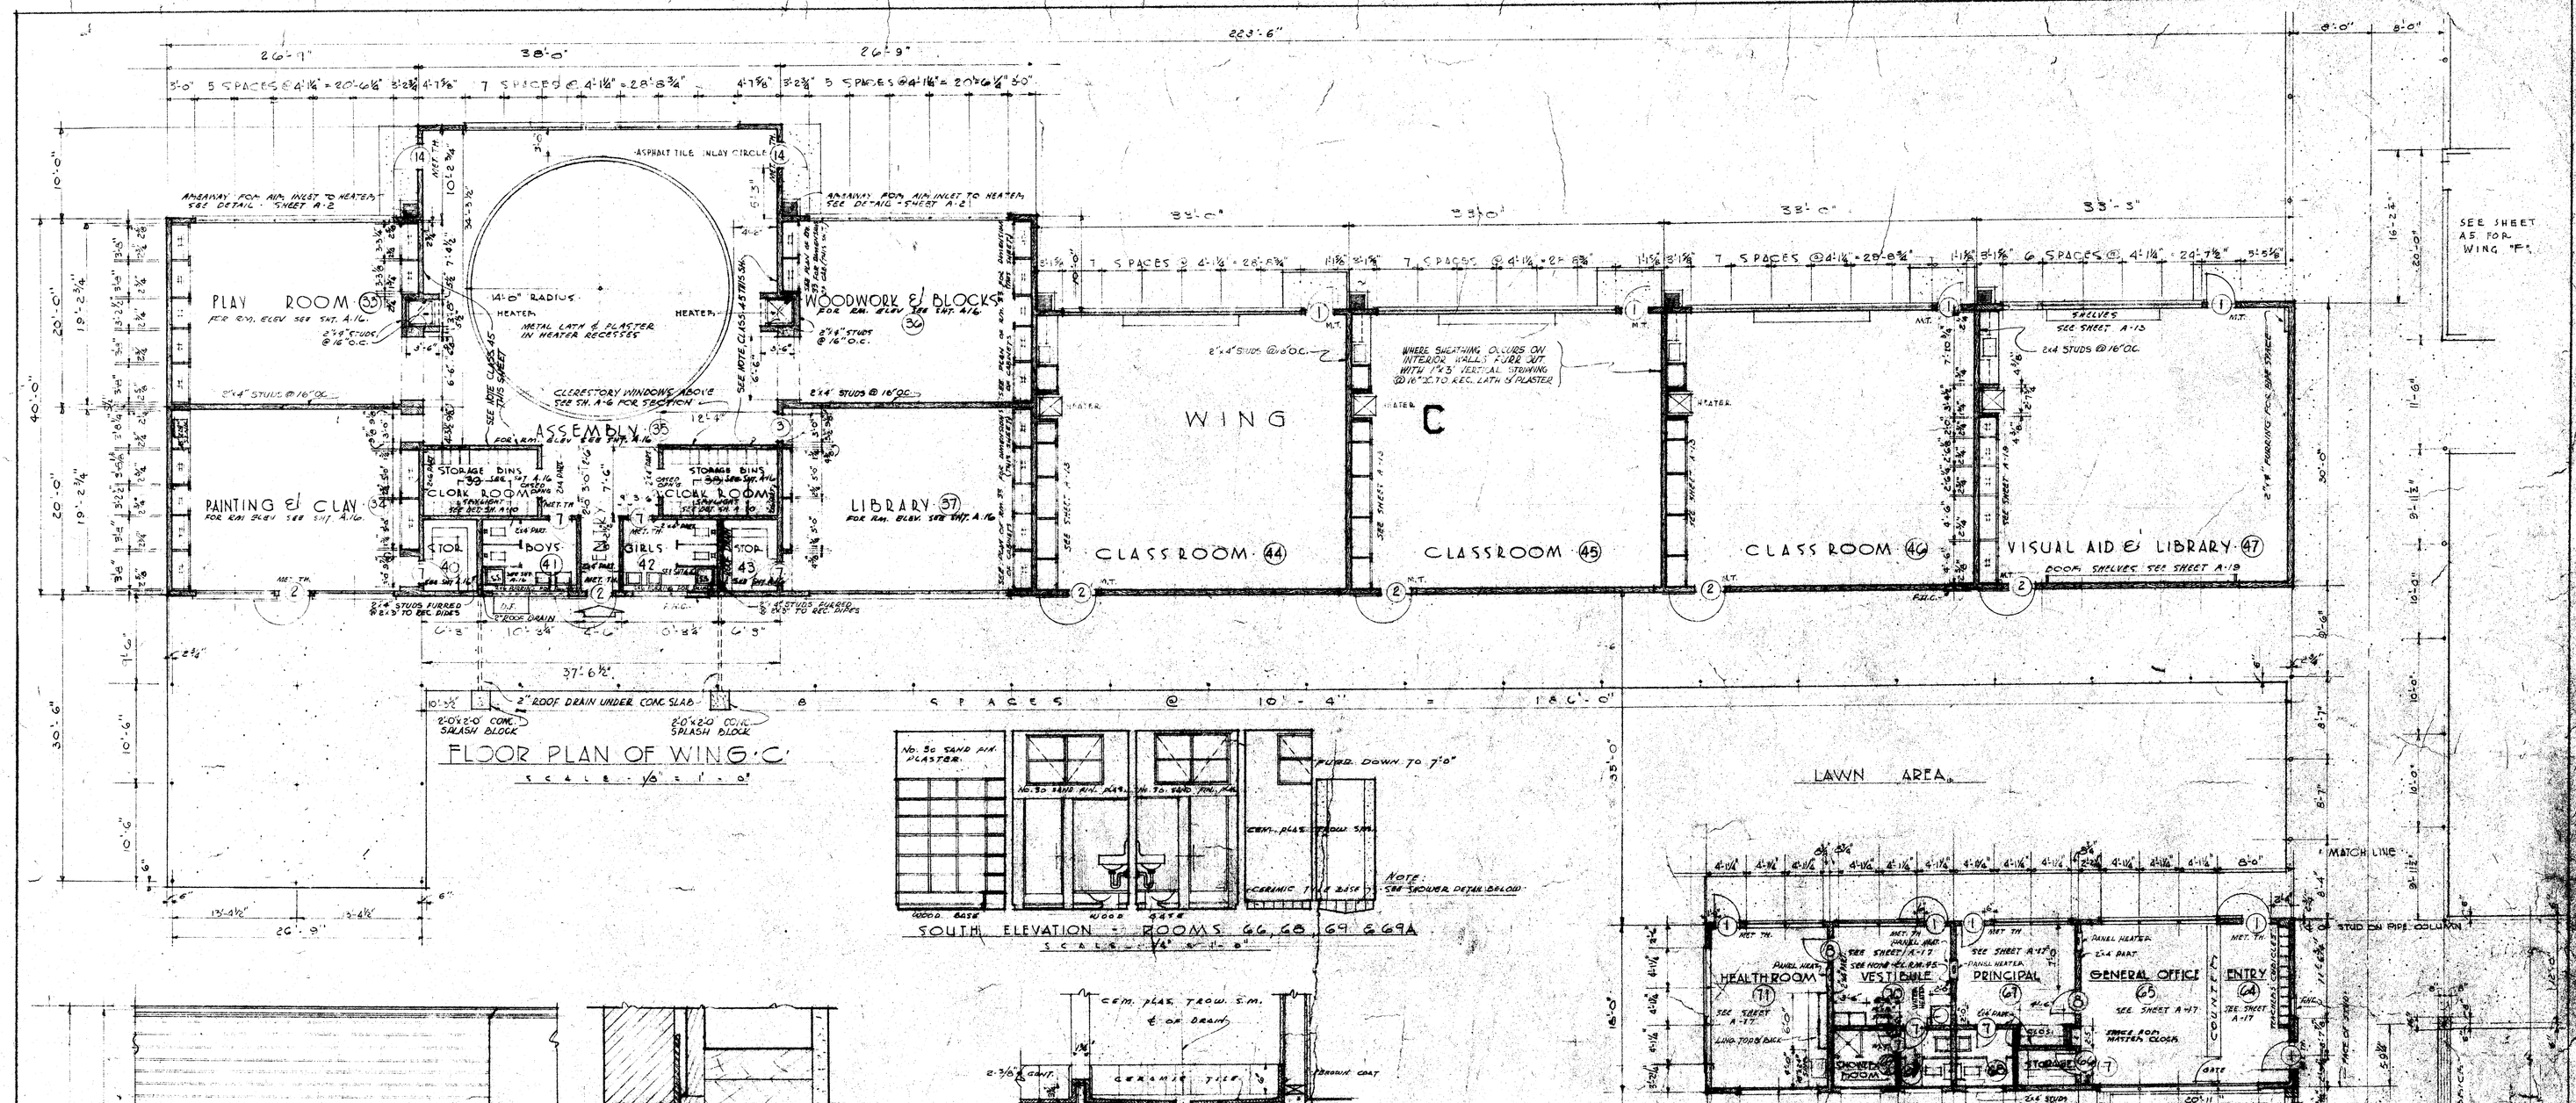
PLAY ROOM 35
PAINTING & CLAY 34
ASSEMBLY 36
WOODWORK & BLOCKS 30
LIBRARY 37
CLASSROOM 44
CLASSROOM 45
CLASS ROOM 46
VISUAL AID & LIBRARY 47
WING C
STORAGE BINS
CLOAK ROOM
BOYS
GIRLS
STOR.
ASPHALT TILE INLAY CIRCLE
14'-0" RADIUS
HEATER
METAL LATH & PLASTER IN HEATER RECESSES
CLERESTORY WINDOWS ABOVE
2"x4" STUDS @ 16" O.C.
2"x6" STUDS @ 16" O.C.
2"x4" STUDS @ 16" O.C.
WHERE SHEATHING OCCURS ON INTERIOR WALLS FURR OUT WITH 1"x3" VERTICAL FURRING @ 16" O.C. TO REC. LATH & PLASTER
SHELVES SEE SHEET A-13
2x4 STUDS @ 16" O.C.
DOOR SHELVES SEE SHEET A-19
2"x4" STUDS FURRED 8" O.C. TO REC. SIDES
2"x4" STUDS @ 16" O.C. TO REC. SIDES
2" ROOF DRAIN UNDER CONC. SLAB
2'-0"x2'-0" CONC. SPLASH BLOCK
8 SPACES @ 10'-4" = 186'-0"
SEE SHEET A5 FOR WING "F"
MATCH LINE
STUD ON PIPE COLUMN
LAWN AREA
HEALTH ROOM 71
VESTIBULE 70
PRINCIPAL 67
GENERAL OFFICE 65
ENTRY 64
STORAGE 69
PLANTING BOX
COUNTER
PANEL HEATER
SEE SHEET A-17
SEE SHEET A-12
SEE SHEET A-13
SEE SHEET A-19
SEE HOME EC. RM. 95
SEE HOME EC. RM. 96
SEE SHEET A-17 FOR HEATER CLOSET
SEE SHEET A-17 FOR LAND TOOLS CLOSET
SEE SHEET A-17 FOR CLOSET
SEE SHEET A-17 FOR ENTRY
SEE SHEET A-17 FOR GENERAL OFFICE
SEE SHEET A-17 FOR PRINCIPAL
SEE SHEET A-17 FOR VESTIBULE
SEE SHEET A-17 FOR HEALTH ROOM
SEE SHEET A-17 FOR PLANTING BOX
SEE SHEET A-17 FOR STORAGE
SEE SHEET A-17 FOR SHOWER ROOM
SEE SHEET A-17 FOR COUNTER
SEE SHEET A-17 FOR PLANTING BOX